



Quality of life since 1825

Kitchen mixer Nautic – low cast spout

Product features

ENERGY-SAVING



VATTENSPAR

- Energy class B, saves energy and water
- Adjustable comfort flow and comfort temperature
- Pivoting spout 110°

Article numbers

Art-no.
GB41204055

EAN
7393792221115



Packaging information

Length: 290 mm | Width: 290 mm | Height: 75 mm

Weight: 2.48 kg


Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

- Complies with Safe Water installation requirements Energy class B, 1.88 kWh

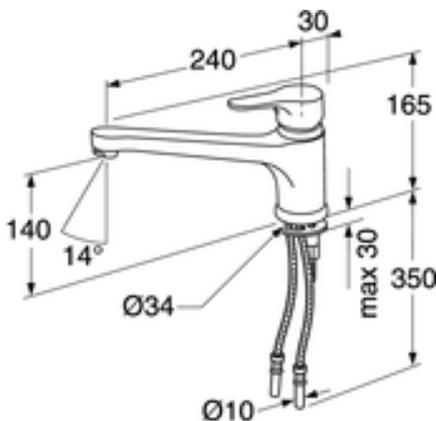

CERTIFIERING
KONTROLL

RI
SE



Denna produkt är anpassad till
Branschregler Säker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.




Technical information

- Max. tap capacity (at 300 kPa): 0,24 l/s
- Pressure loss with flow (0,2 l/s) 208 kPa

GUSTAVSBERG/

FLOW CHART/ NAUTIC KITCHEN MIXER

GUSTAVSBERG /
SMARTER BATHROOMS

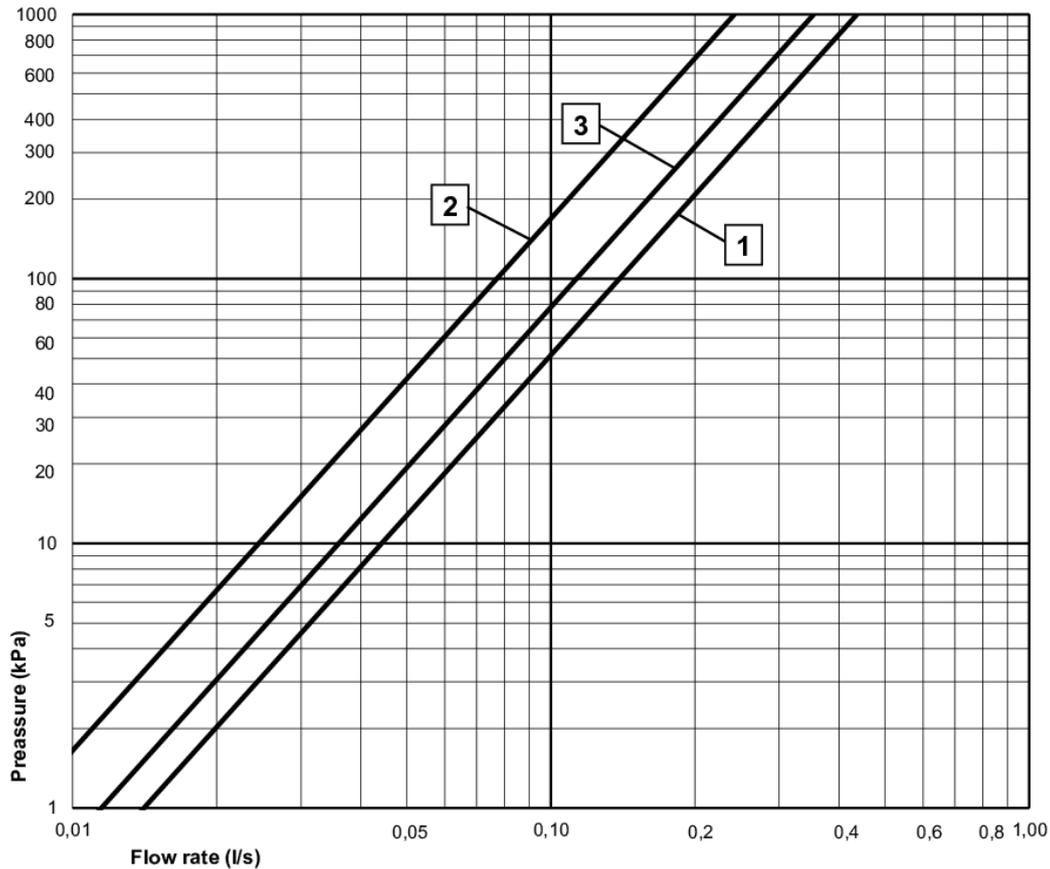

- 1** Max flow
- 2** Comfort flow
- 3** Dishwasher shut off valve

Valid for curve **1**

- Flowrate at 300 kPa:	0,24 l/s
- Pressure at flow 0,1 l/s:	52 kPa
- Pressure at flow 0,2 l/s:	208 kPa
- Pressure at flow 0,33 l/s:	565 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com