



Quality of life since 1825

# Shower mixer Nautic – single-lever

With shower connection upwards, 160 c-c

## Product features

- Adjustable comfort flow can be activated as needed
- Adjustable max temperature for increased scald protection
- Can be adjusted for universal accessibility with extended lever

## Article numbers

Art-no.  
GB41204024

EAN  
7393792217712

## Packaging information

Length: 230 mm | Width: 185 mm | Height: 115 mm  
Weight: 1.92 kg  
Weight: 1pc

## Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.


## Energy labeling and certifications

- Complies with Safe Water installation requirements.




## Technical information

- Standard connection dimension: 160 c-c

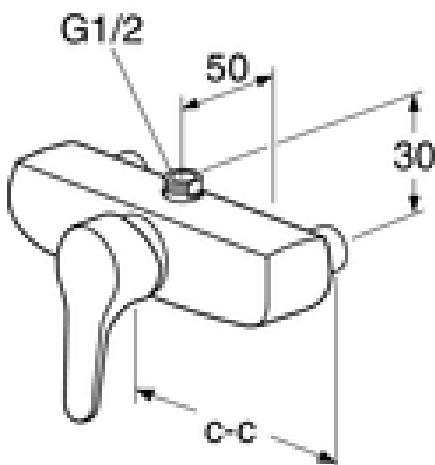

# GUSTAVSBERG/ FLOW CHART/

GUSTAVSBERG /  
SMARTER BATHROOMS

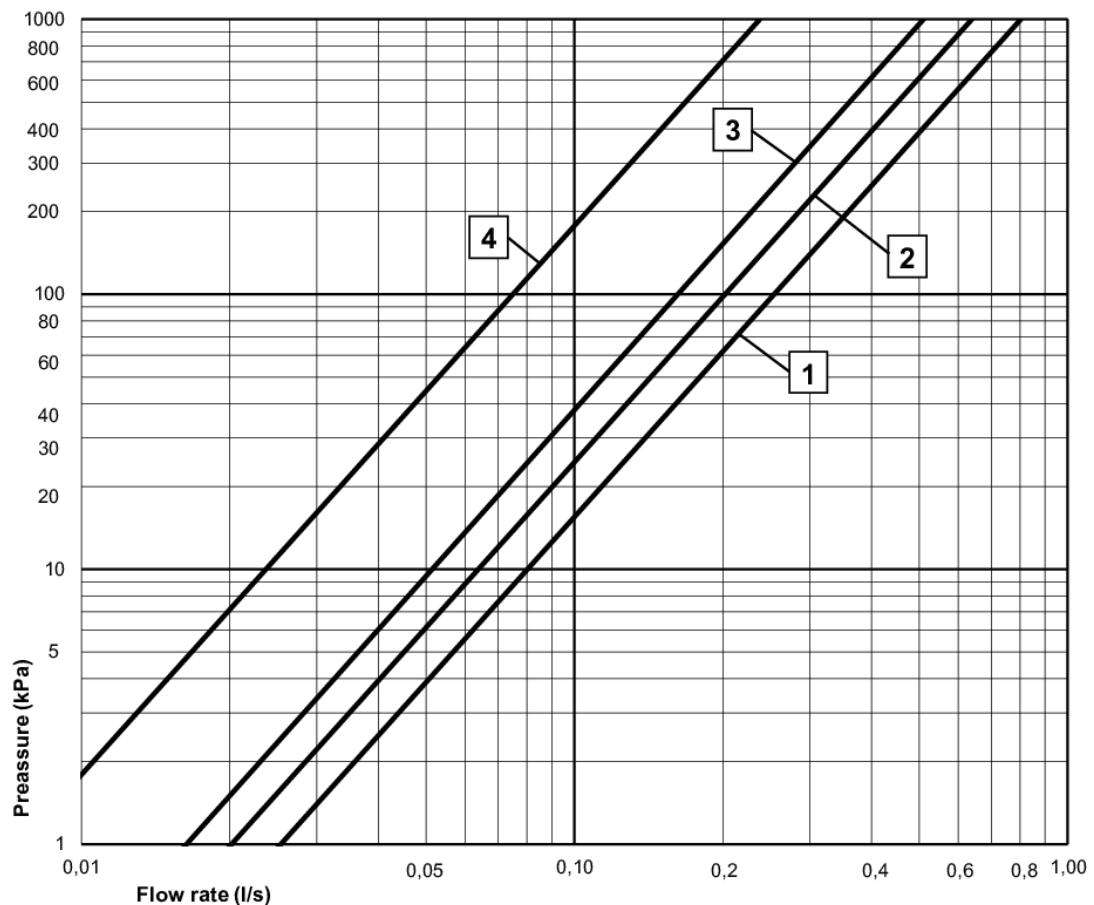

- 1** Max flow (bath- and shower outlet)
- 2** Bathtub outlet, GB41636820, GB41638760
- 3** Bathtub outlet, GB41636819, GB41638759
- 4** Shower set GB41103250

Valid for curve 1

- Flowrate at 300 kPa:	0,44 l/s
- Pressure at flow 0,1 l/s:	16 kPa
- Pressure at flow 0,2 l/s:	62 kPa
- Pressure at flow 0,33 l/s:	169 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)