



Quality of life since 1825



# Shower mixer Nautic – single-lever

With shower connection downwards, 150 c-c

## Product features

---

- Can be combined with all kitchen or bathroom spouts
- Adjustable comfort flow can be activated as needed
- Plugged connections for extra water outlets

## Article numbers

---

Art-no.  
GB41214004

EAN  
7393792217682

## Packaging information

---

Length: 230 mm | Width: 165 mm | Height: 115 mm

Weight: 1.86 kg

Weight: 1 pc

## Assembling & Care

---

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

## Energy labeling and certifications

---

- Complies with Safe Water installation requirements.



## Technical information

---


- Standard connection dimension: 150 c-c

# GUSTAVSBERG/

## FLOW CHART/

### NAUTIC SINGLE LEVER BATHTUB AND SHOWER MIXER

GUSTAVSBERG /  
SMARTER BATHROOMS

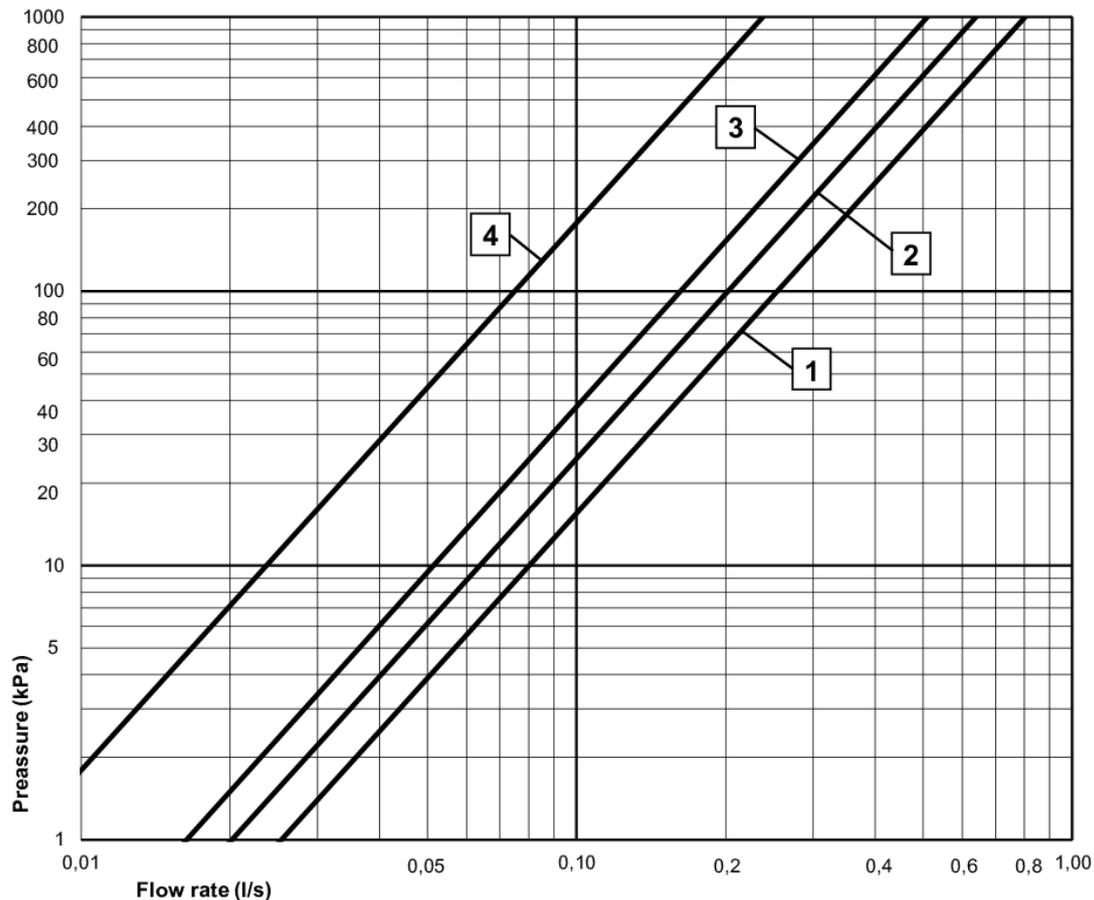

- 1** Max flow (bath- and shower outlet)
- 2** Bathtub outlet, GB41636820, GB41638760
- 3** Bathtub outlet, GB41636819, GB41638759
- 4** Shower set GB41103250

Valid for curve **1**

- Flowrate at 300 kPa:	0,44 l/s
- Pressure at flow 0,1 l/s:	16 kPa
- Pressure at flow 0,2 l/s:	62 kPa
- Pressure at flow 0,33 l/s:	169 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)