



Quality of life since 1825

Bathroom sink faucet Nautic

With side spray, wall holder and chain bracket

Product features

ENERGY-SAVING



ECO-START



VATTENSPAR

- Energy class A, saves water and energy
- Opti-start, 17°C when lever straight forward
- Adjustable comfort flow and comfort temperature

Article numbers

Art-no.
GB41214147

EAN
7393792217651

Packaging information

Length: 295 mm | Width: 285 mm | Height: 75 mm

Weight: 1.86 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.


Energy labeling and certifications

- Complies with Safe Water installation requirementsEnergy class A, 1.41 kWh



Technical information

- Max. tap capacity (at 300 kPa): 0,14 l/s
- Pressure loss with flow (0,1 l/s) 149 kPa

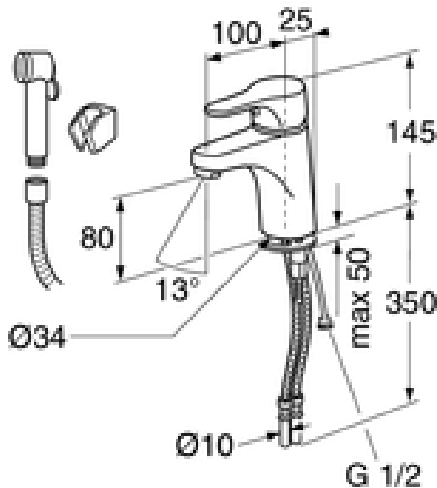


GUSTAVSBERG/

FLOW CHART/

NAUTIC WASHBASIN MIXER, SIDE SPRAY

GUSTAVSBERG /
SMARTER BATHROOMS

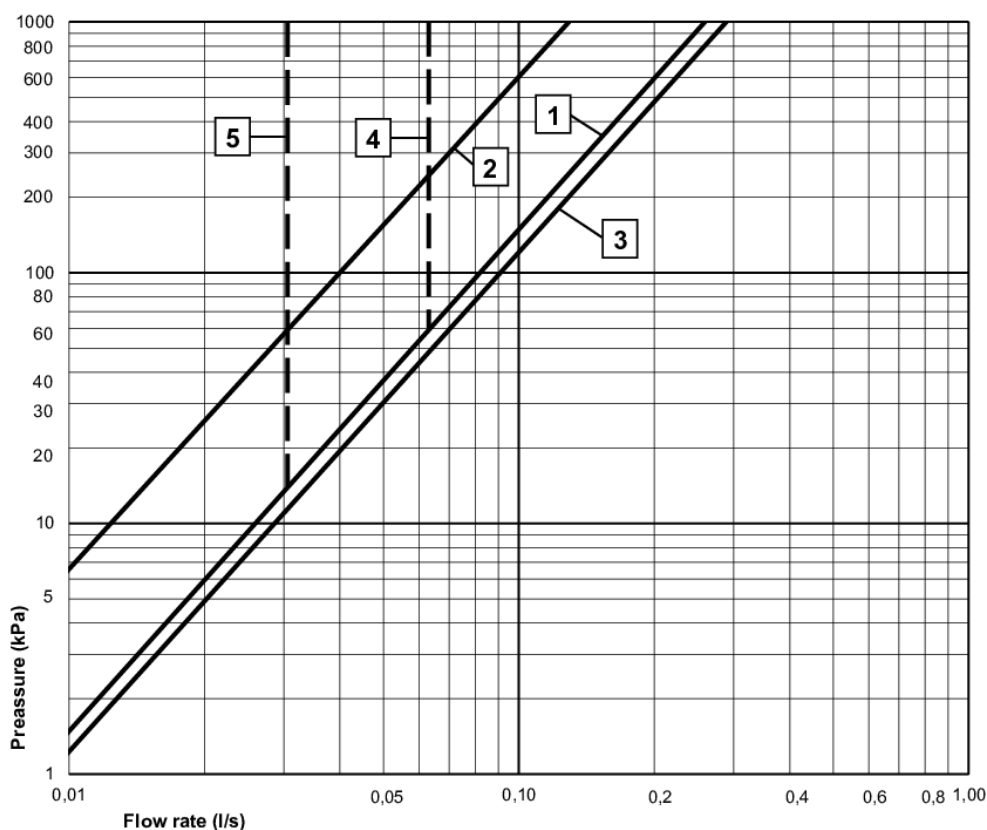

- 1** Max flow
- 2** Comfort flow
- 3** Side spray
- 4** Optional aerator GB41638662 10
- 5** Optional aerator GB41638663 10

Valid for curve **1**

- Flowrate at 300 kPa:	0,142 l/s
- Pressure at flow 0,1 l/s:	149 kPa
- Pressure at flow 0,2 l/s:	595 kPa
- Pressure at flow 0,33 l/s:	NA



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com