



Quality of life since 1825

Bathroom sink faucet Nautic

With chain bracket.

Product features

ENERGY-SAVING



ECO-START



VATTENSPAR

- Energy class A, saves water and energy
- Opti-start, 17°C when lever straight forward
- Adjustable comfort flow and comfort temperature

Article numbers

Art-no.
GB41214047

EAN
7393792217620

Packaging information

Length: 225 mm | Width: 205 mm | Height: 70 mm

Weight: 1.37 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

- Complies with Safe Water installation requirementsEnergy class A, 1.41 kWh




CERTIFIERING
KONTROLL

RI
SE




Technical information

- Max. tap capacity (at 300 kPa): 0,24 l/s
- Pressure loss with flow (0,1 l/s) 52 kPa

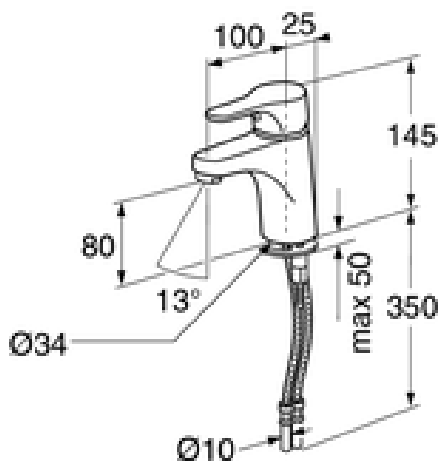

Spare parts

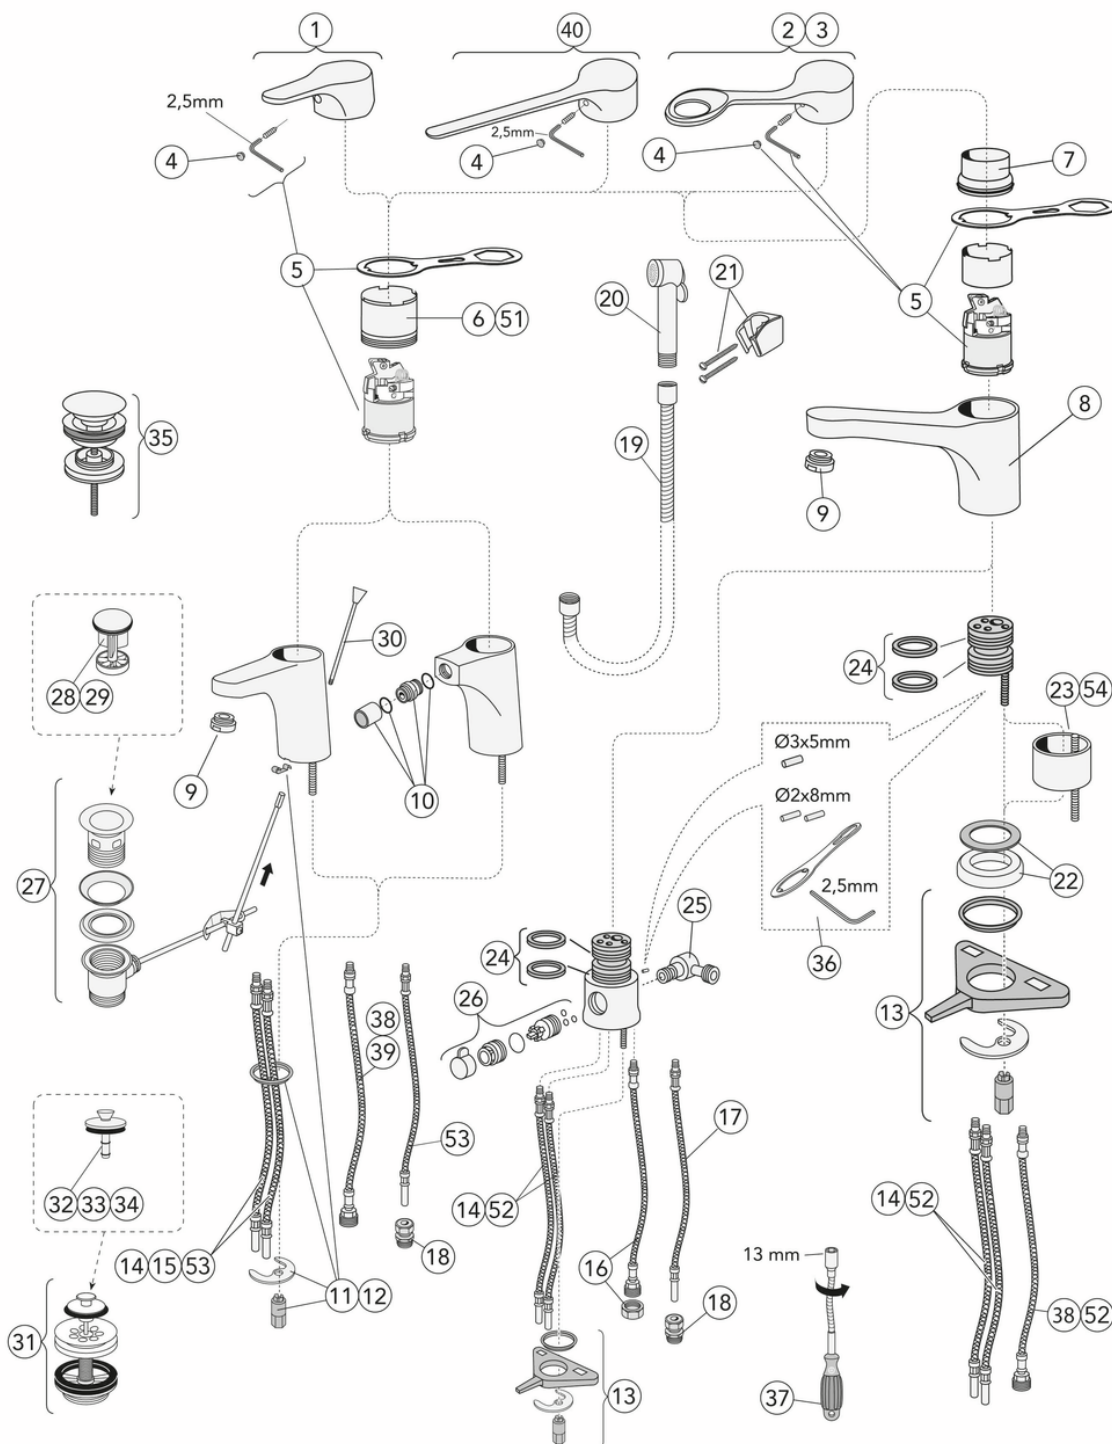


No.	Product	Art-no.
1	Lever, Nautic	GB41637250
2	Elongated lever	GB41637360 01
3	Elongated lever	GB41637363 01
4	Covering plug	GB41634828 01
5	Ceramic package	GB41637267 01
6	Retaining ring M45x1.5	GB41637261 01
7	Cover ring	GB41638202
8	Spout	GB41638197
9	Aerator	GB41630131 01
10	Aerator/ball joint	GB41637270 01
11	Fittings	GB41637280 01
12	Fittings	GB41637282 01
13	Fittings	GB41634157 01
14	SoftPex hose	GB41637161 02
15	SoftPex hose	GB41638721 02
17	SoftPex hose	GB41638199 01
18	Connection 10xG1/2, -201005	FG032033520
19	Shower hose, Biflex	GB41636263 00
20	Hand shower	GB41633860 33
21	Hand shower fixing	GB41637575
23	Height extension 50 mm	GB41632834
24	X-rings	GB41633971 02
25	Elbow pipe	GB41635790 01
26	Insert to shut down dishwasher	GB41635762 3301
27	Pop-up waste	GB41637450
28	Plug	GB41632625 01
30	Lifting rod	GB41630305
31	Plug valve	GB41637445
34	Stopper for inlet filter plug valve	GB41638453 01
35	Pushdown valve	GB41636575 01
36	Details for swiveling limiter	GB41633972
37	Mounting tools 13/6k	GB43000014 10
38	SoftPex hose	GB41638224 01
39	Softpex hose 300 mm	GB41638720 01
40	Elongated lever	GB41637367 01
51	Retaining ring	GB41638981 01
52	SoftPex hose - PE	GB41638738 02
53	SoftPex hose	GB41638708 02

GUSTAVSBERG/

FLOW CHART/

NAUTIC WASHBASIN MIXER

GUSTAVSBERG /
SMARTER BATHROOMS

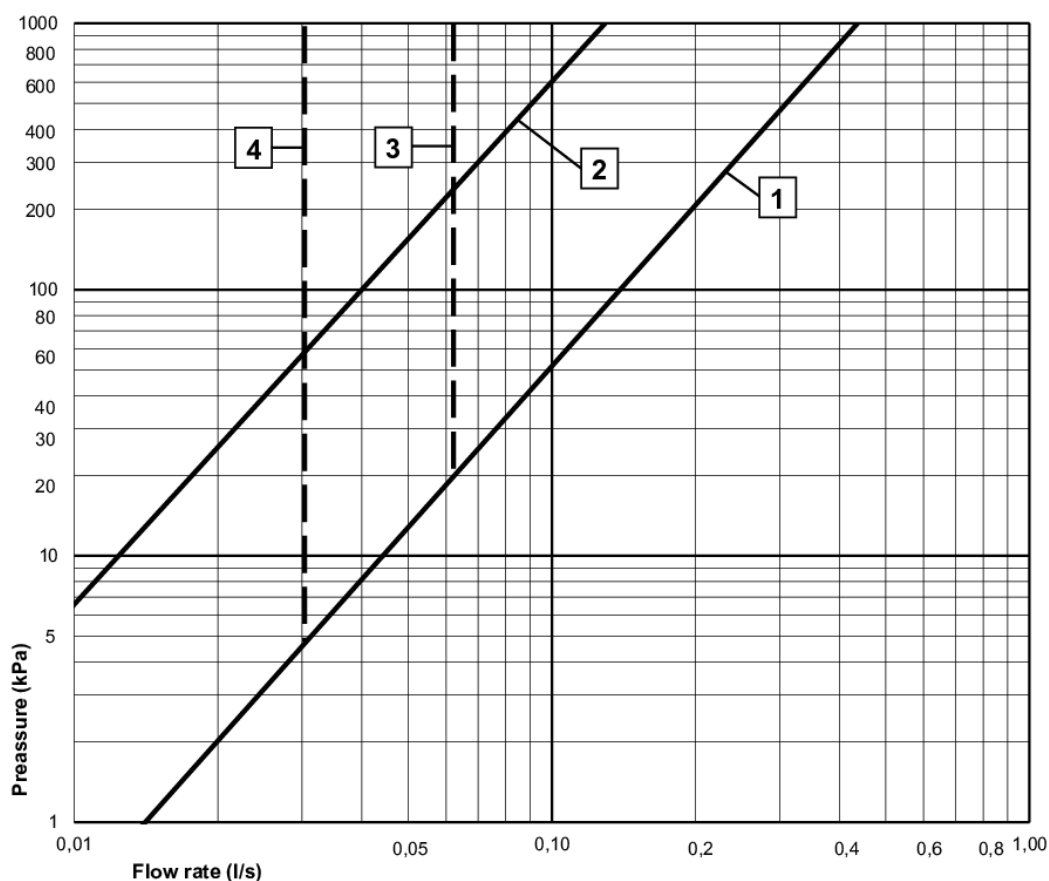

- 1** Max flow
- 2** Comfort flow
- 3** Optional aerator GB41638662 10
- 4** Optional aerator GB41638663 10

Valid for curve **1**

- Flowrate at 300 kPa:	0,24 l/s
- Pressure at flow 0,1 l/s:	52 kPa
- Pressure at flow 0,2 l/s:	208 kPa
- Pressure at flow 0,33 l/s:	565 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com