



Quality of life since 1825

Bathroom sink faucet Nautic

With bottom valve and lift bar

Product features

ENERGY-SAVING



ECO-START



VATTENSPAR

- Energy class A, saves water and energy
- Opti-start, 17°C when lever straight forward
- Adjustable comfort flow and comfort temperature

Article numbers

Art-no.
GB41214041

EAN
7393792217613

Packaging information

Length: 225 mm | Width: 205 mm | Height: 70 mm

Weight: 1.67 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

- Complies with Safe Water installation requirements Energy class A, 1.41 kWh



CERTIFIERING
KONTROLL




Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Technical information

- Max. tap capacity (at 300 kPa): 0,24 l/s
- Pressure loss with flow (0,1 l/s) 52 kPa

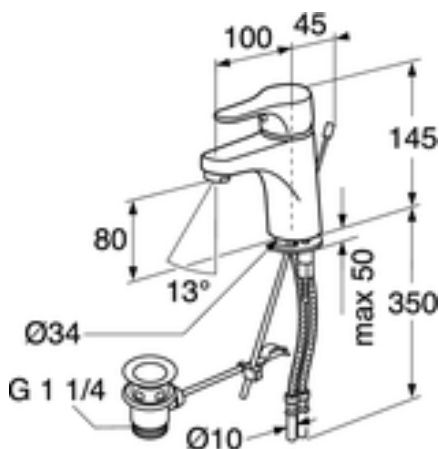


GUSTAVSBERG/

FLOW CHART/

NAUTIC WASHBASIN MIXER

GUSTAVSBERG /
SMARTER BATHROOMS

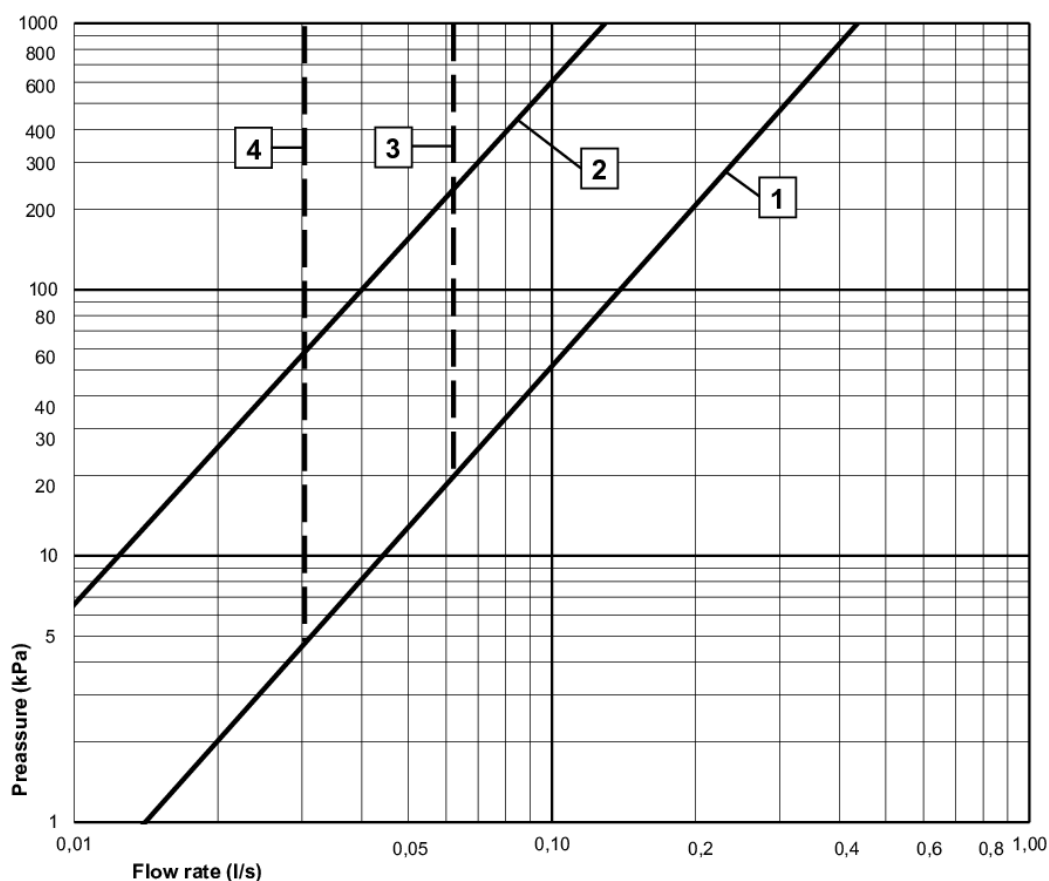

- 1** Max flow
- 2** Comfort flow
- 3** Optional aerator GB41638662 10
- 4** Optional aerator GB41638663 10

Valid for curve **1**

- Flowrate at 300 kPa:	0,24 l/s
- Pressure at flow 0,1 l/s:	52 kPa
- Pressure at flow 0,2 l/s:	208 kPa
- Pressure at flow 0,33 l/s:	565 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com