



Quality of life since 1825

Bathroom sink faucet Nautic – wall mounted

150 mm spout, 150 c-c

Product features

ENERGY-SAVING



VATTENSPAR

- Energy class B, saves energy and water
- Adjustable comfort flow and comfort temperature
- Plugged connections for extra water outlets

Article numbers

Art-no.
GB41214252

EAN
7393792217866

Packaging information

Length: 230 mm | Width: 185 mm | Height: 115 mm

Weight: 2.13 kg


Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

- Complies with Safe Water installation requirements Energy class B, 1.86 kWh




Denna produkt  r anpassad till
Branschregler S ker Vatteninstallation
2021:1. Leverant ren garanterar
produkterns funktion  m branschreglerna
och monteringsanvisningarna f lj s.



Technical information

- Standard connection dimension: 150 c-c

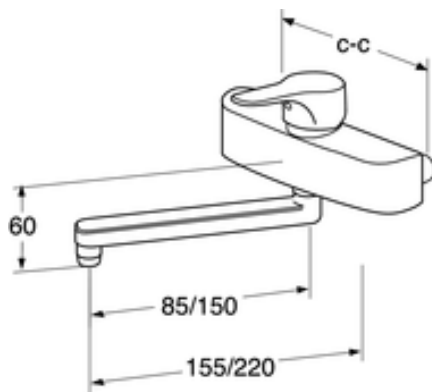


GUSTAVSBERG/

FLOW CHART/

NAUTIC SINGLE LEVER BATHTUB AND SHOWER MIXER

GUSTAVSBERG /
SMARTER BATHROOMS

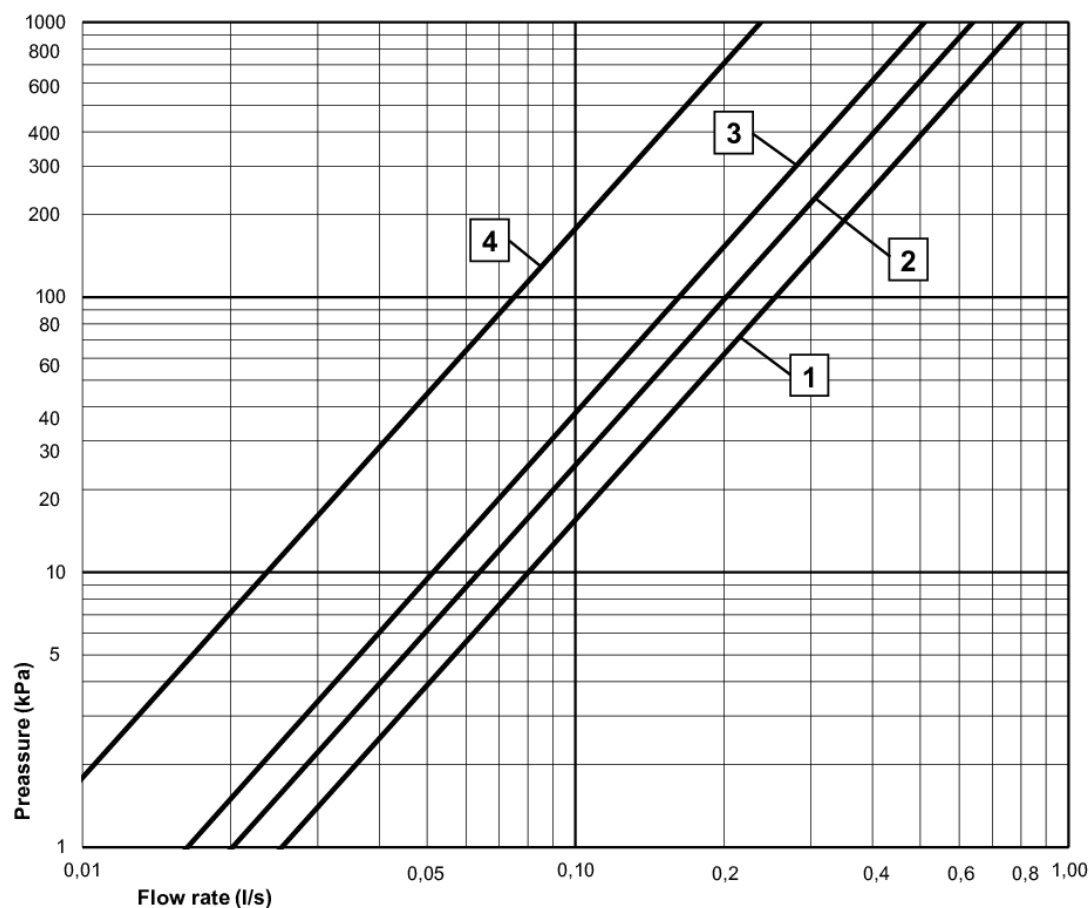

- 1** Max flow (bath- and shower outlet)
- 2** Bathtub outlet, GB41636820, GB41638760
- 3** Bathtub outlet, GB41636819, GB41638759
- 4** Shower set GB41103250

Valid for curve **1**

- Flowrate at 300 kPa:	0,44 l/s
- Pressure at flow 0,1 l/s:	16 kPa
- Pressure at flow 0,2 l/s:	62 kPa
- Pressure at flow 0,33 l/s:	169 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com