



Quality of life since 1825

Tub faucet Logic – thermostat

With pivoting spout, 150 c-c

Product features

- Safe Touch reduces heat on the front of the faucet
- Maintains even water temperature
- Smart built-in diverter in hose attachment

Article numbers

Art-no.
GB41214933

EAN
7393792227117

Packaging information

Length: 440 mm | Width: 275 mm | Height: 75 mm
Weight: 2.99 kg
Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.


Energy labeling and certifications

- Complies with Safe Water installation requirements.



Technical information

- Standard connection dimension: 150 c-c

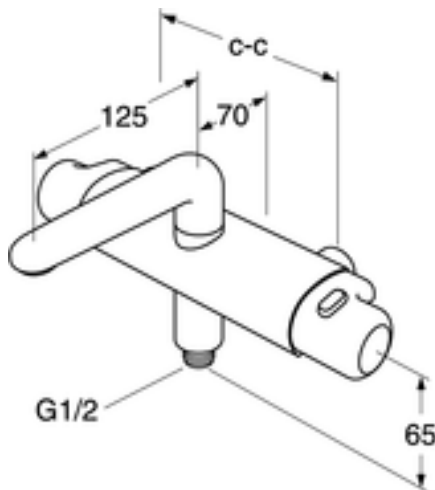




SMARTER
BATHROOMS

FLOW CHART

LOGIC THERMOSTATIC BATHTUB AND SHOWER MIXER

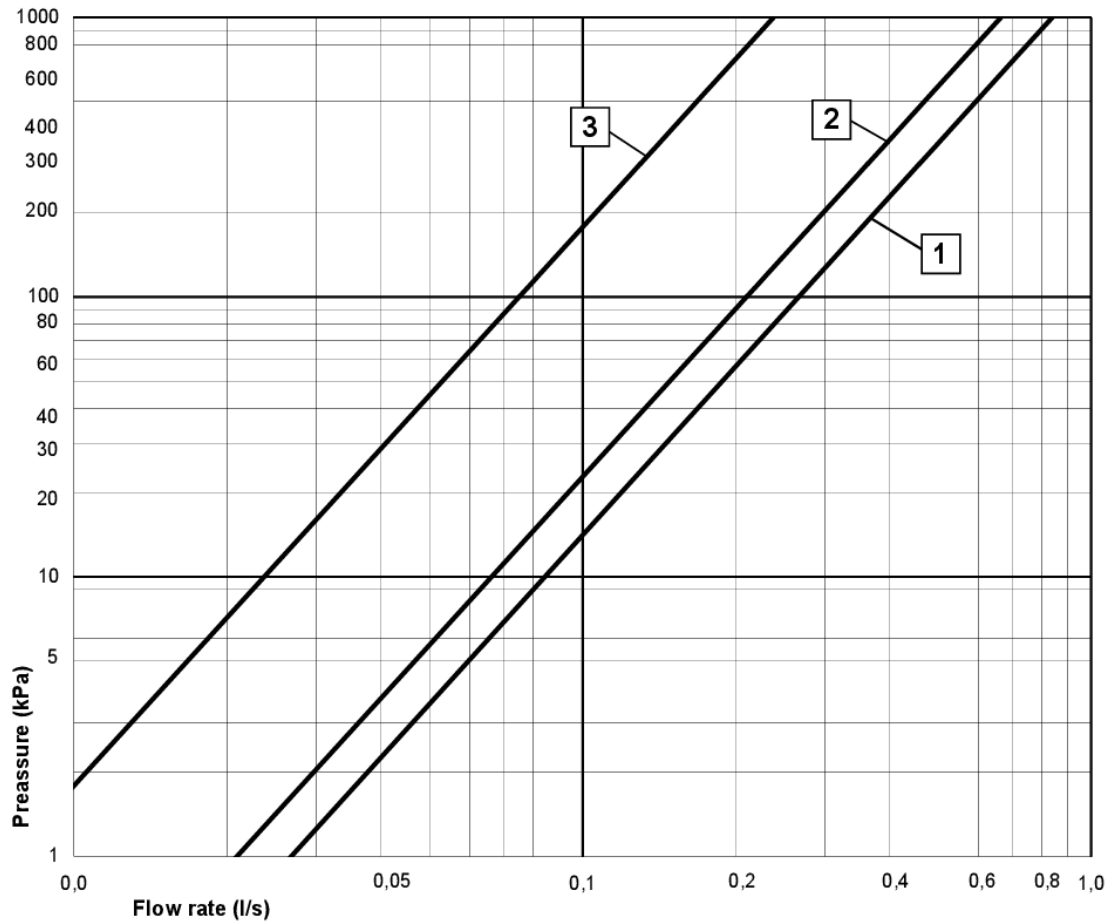

- 1** Max flow (bath- and shower outlet)
- 2** Bathtub outlet
- 3** Shower set GB41103250



A MEMBER OF THE
VILLEROY & BOCH GROUP

Villeroy & Boch Gustavsberg AB
Box 400, 134 29 Gustavsberg
Phone +46 (0)8-570 391 00
www.gustavsberg.com | info@gustavsberg.com