



Quality of life since 1825

Dušisegiti Nautic – termostaat, 40 c-c

Allpoolse toruühendusega

Toote Omadused

SAFE TOUCH



- Safe Touch, vähendab segisti esikülje kuumust
- Hoiab ühtlast veetemperatuuri surve või temperatuuri muutmisel
- Saab komplekteerida jooksutoruga

Article number

Art.nr.
GB41205404

EAN
7393792226318

Pakendiinfo

Pikkus: 225 mm | Laius: 205 mm | Kõrgus: 70 mm

Kaal: 1.92 kg


Number pakendis: 1 pc

Paigaldus ja hooldus

Enne paigaldamist tuleb torud kuni segistini puhtaks loputada. Segisti ühendatakse paremalt külma- ja vasakult kuumaveetoruga. Veearve: maksim. 1000 kPa, min 50 kPa. Kuuma vee temperatuur maksim.: 80 C, min 45 C. Palume



Energiamärgistus ja vastavustunnistused

- Toode vastab ohutu veevärgi nõuetele



Tehniline info

- Max. tap capacity (at 300 kPa): 0,46 l/s
- Pressure loss with flow (0,2 l/s) 57 kPa
- Ühenduse mõõdud: 40 c-c

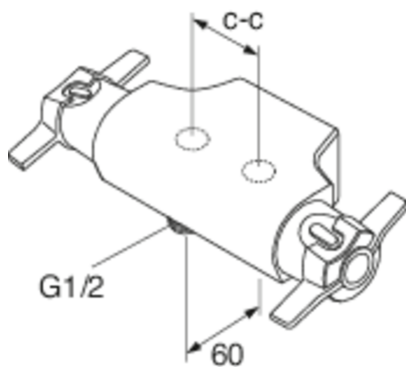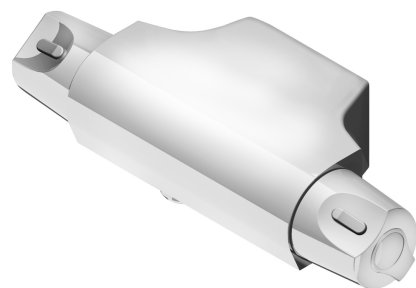


GUSTAVSBERG/

FLOW CHART/

NAUTIC THERMOSTATIC BATHTUB AND SHOWER MIXER

GUSTAVSBERG /
SMARTER BATHROOMS

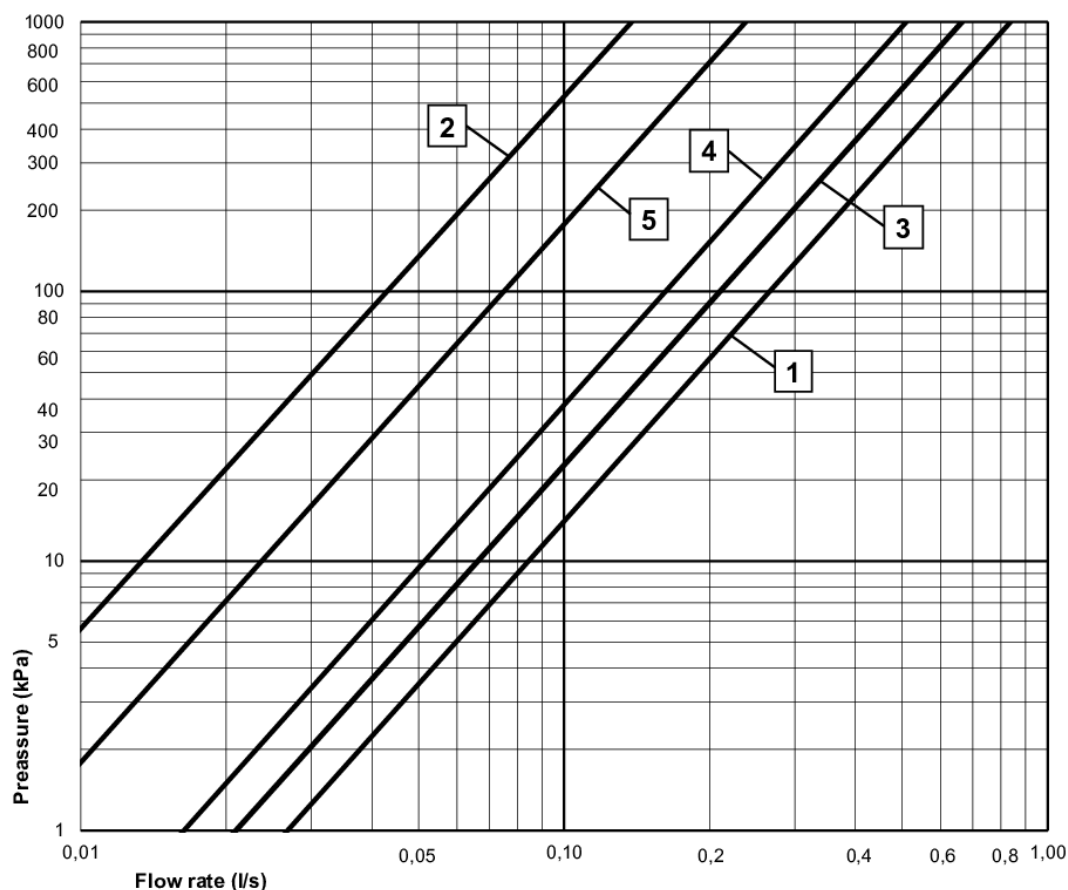

- 1** Max flow (bath- and shower outlet)
- 2** Comfort flow
- 3** Bathtub outlet GB41636820, GB41638760
- 4** Bathtub outlet GB41636819, GB41638759
- 5** Shower set GB41103250

Valid for curve **1**

- Flowrate at 300 kPa:	0,46 l/s
- Pressure at flow 0,1 l/s:	14 kPa
- Pressure at flow 0,2 l/s:	57 kPa
- Pressure at flow 0,33 l/s:	154 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com