



Quality of life since 1825

Wall-hung toilet Nautic 1522 - with cistern, Hygienic Flush

Dual flush 4/2L, without seat, C+.

Product features

CERAMICPLUS



- Ceramicplus for quick and eco-friendly cleaning
- Space between tank and wall for easier cleaning
- With open, glazed flush edge for simplified cleaning

Article numbers

Art-no.
GB1115222R1205

EAN
7391530067391

Packaging information

Length: 900 mm | Width: 380 mm | Height: 900 mm

Weight: 34 kg

Weight: 1 pc

Assembling & Care

Mounted with bolts directly on the wall. Washers, bushings and nuts included (M12) but not bolts. Bolt projection from finished wall must be 60 ± 2 mm. Rubber bellows for waste pipe connection included. See supplied installation instructions and mounting kit for each toilet. Triomont fixture for wall hung toilet and bidet RSK 382 57 56, is recommended for installation on weak walls. According to the AMA the seat height should be 450 mm which corresponds to 270 mm distance (centre-centre) between the existing floor and the centre of the drain.



Energy labeling and certifications

- The product follows AMA recommendations, SS-EN 33 dimensioning and SS-EN 997 functionComplies with Safe Water installation requirementsCE approved



Technical information

- CO2 Footprint: 74.33 kg
- Flushing - water quantity: 4/2 Dual flush 4/2 (L)

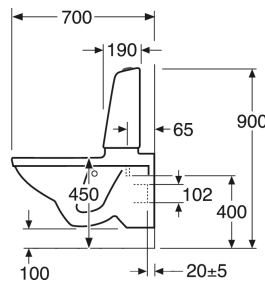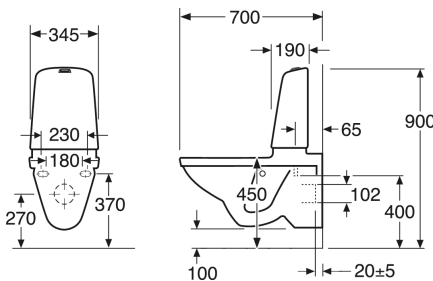

20±5

100

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450

102

400

65

190

900

700

345

230

180

370

270

100

20±5

450


102

400

65</

- Standard connection dimension: c/c 155mm sitsfäste

Spare parts

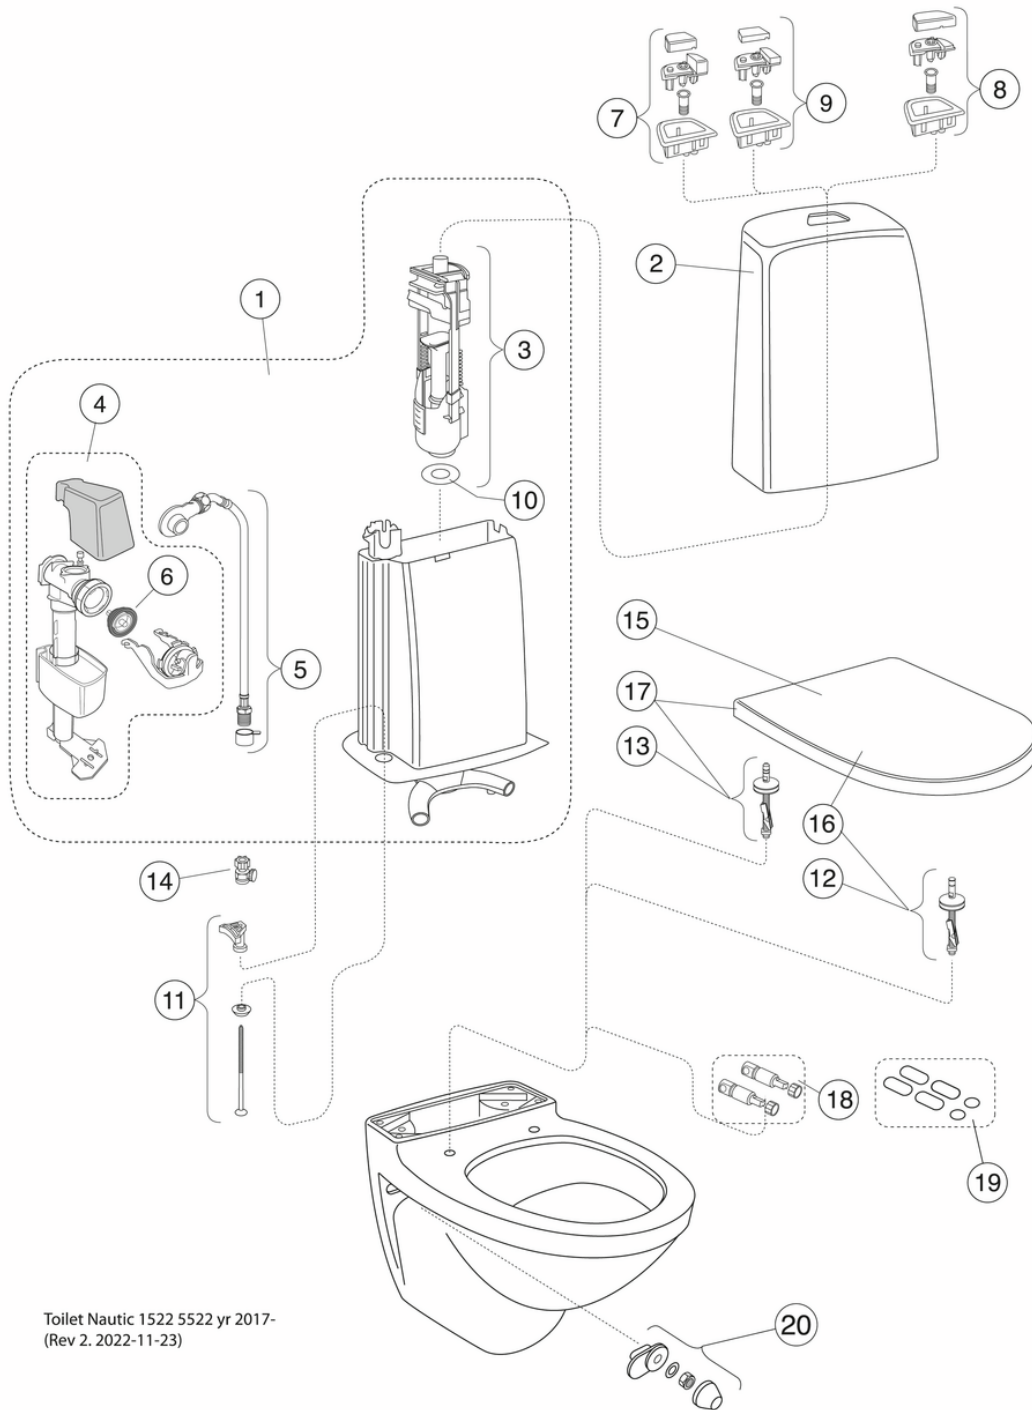

Toilet Nautic 1522 5522 yr 2017-
(Rev 2. 2022-11-23)

No.	Product	Art-no.
1	Complete inner tank	GB19299N0100
2	Cistern housing	GB185580001200
3	Valve housing, flush valve	9GN00100
4	Fill valve	9GN03200
5	Inlet tube	9GN01000
6	Membrane	9GN00300
7	Knapphus high Duo	9GN00561
8	Knapphus high Single	9GN00661
9	Knapphus low Duo	9GN01161
10	Valve housing gasket	9GN00400
11	Cistern fixation kit	92226100
13	seat hinges	92095761
14	Shut-off valve	GB1929900503
15	Toilet seat Nautic 9M24 - Standard	9M246101
16	Toilet seat Nautic 9M25 - Rigid fixings	9M256101
17a	Toilet seat Nautic - Slim seat	8M45S101
17b	Toilet seat Nautic 9M26 - SC/QR	9M26S101
17c	Toilet seat Nautic 9M26 - SC/QR	9M26S136
18	Soft Close damper	GB92242400
19	Buffer set	92242001