



Quality of life since 1825

Shower column Nautic Square

160 c-c

Product features

SAFE TOUCH



- Super slim head shower with generous water flow
- 3-functional hand shower with a pushbutton
- A stylish mixer with grip-friendly handles in innovative design

Article numbers

Art-no.
GB41205335

EAN
7393792231220

Packaging information

Length: 714 mm | Width: 368 mm | Height: 94 mm

Weight: 5.2 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Technical information

- Standard connection dimension: 160 c-c

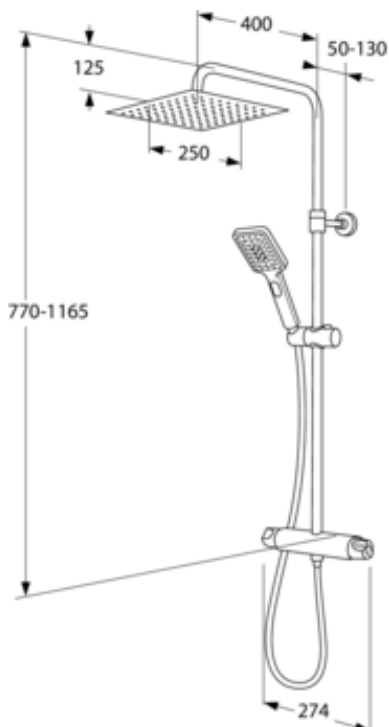


GUSTAVSBERG/

FLOW CHART/

NAUTIC SHOWER COLUMN SQUARE

GUSTAVSBERG /
SMARTER BATHROOMS

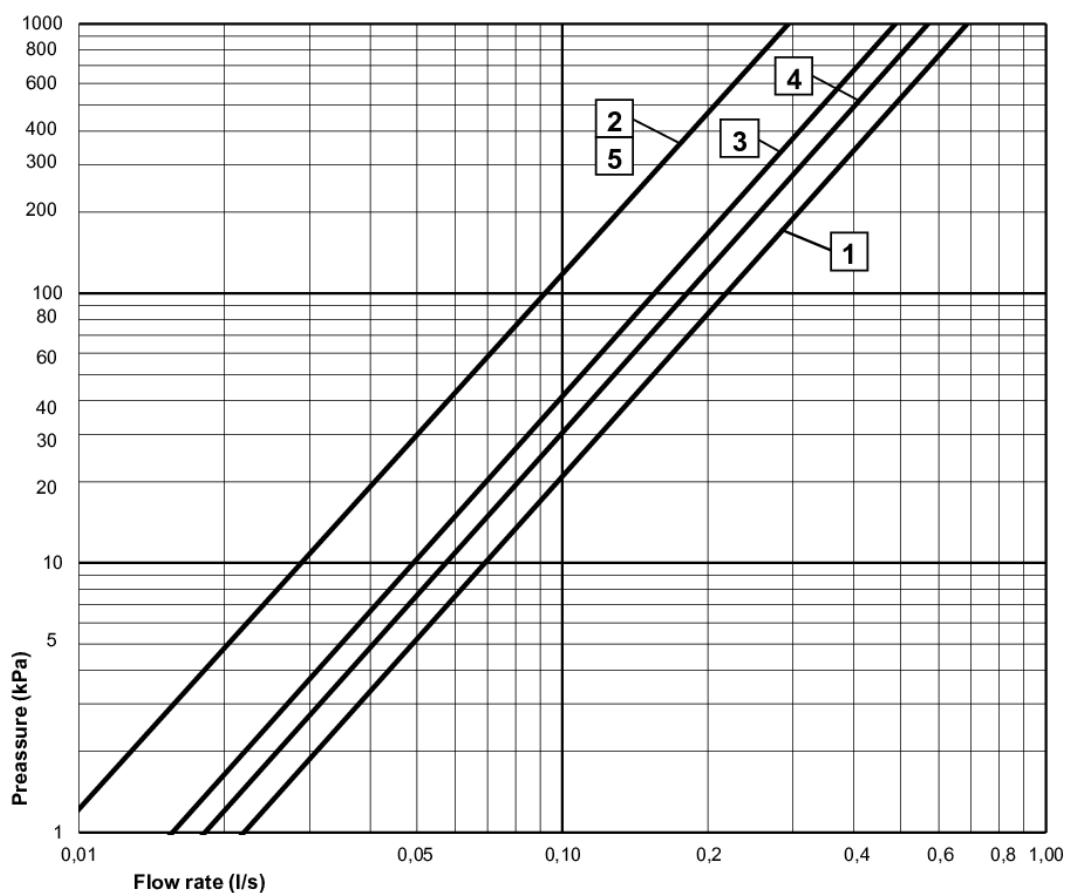

- 1** Head shower
- 2** Hand shower
- 3** Bathtub outlet, spout GB41638759
- 4** Bathtub outlet, spout GB41638760
- 5** Hand shower outlet, spouts GB41638759, GB41638760

Valid for curve **1**

- Flowrate at 300 kPa:	0,375 l/s
- Pressure at flow 0,1 l/s:	21 kPa
- Pressure at flow 0,2 l/s:	85 kPa
- Pressure at flow 0,33 l/s:	231 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com