

Pre-rinse set

With thermostatic mixer 160 c-c and spout

Product features

SAFE TOUCH





- · Functional, ergonomic design
- · Hand-held rinsing nozzle that minimizes pressure surges
- · The nozzle features two different spray patterns

Article numbers

Art-no. GB41204972 EAN 7393792231930

Packaging information

Length: 880 mm | Width: 245 mm | Height: 135 mm

Weight: 6.6 kg Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

 The product is adapted to fulfil Safe Water Installation industry quidelines










Technical information

- Max. tap capacity (at 300 kPa): 0,09 l/s
- Standard connection dimension: 160 c-c

GUSTAVSBERG/

FLOW CHART/ PRE-RINSE SET



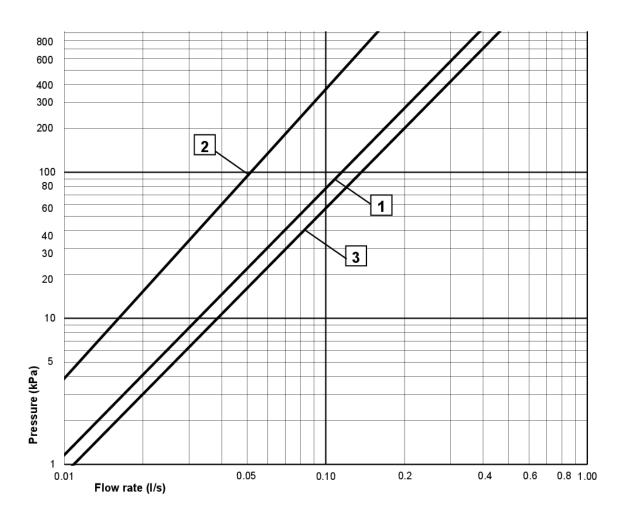

White spray plateGreen spray plateSpout

