



Quality of life since 1825

Shower faucet - single lever

Lead-free - with vacuum valve, 160 c-c

Product features



- Contains less than 0.1% lead
- Adjustable max temperature for increased scald protection
- Can be functionally adapted with elongated lever

Article numbers

Art-no.
GB41204274 0

EAN
7393792229265

Packaging information

Length: 225 mm | Width: 117 mm | Height: 183 mm
Weight: 2.2 kg
Weight: 1 pc

Assembling & Care


Mounted according to the instructions. Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications



Technical information


- Standard connection dimension: 160 c-c

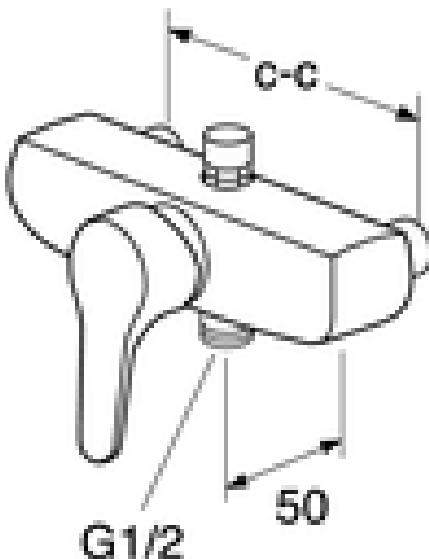

GUSTAVSBERG/

FLOW CHART/

NAUTIC SINGLE LEVER BATHTUB AND SHOWER MIXER

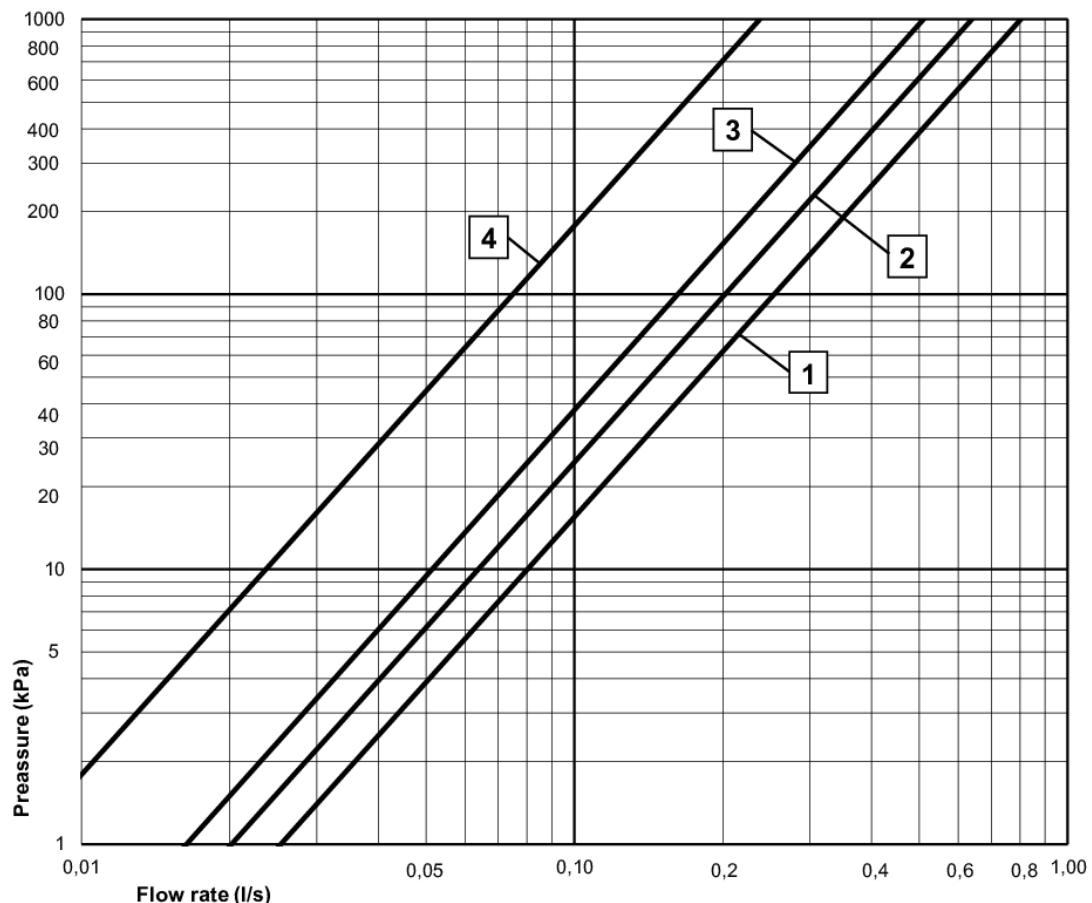

- 1** Max flow (bath- and shower outlet)
- 2** Bathtub outlet, GB41636820, GB41638760
- 3** Bathtub outlet, GB41636819, GB41638759
- 4** Shower set GB41103250

Valid for curve **1**

- Flowrate at 300 kPa:	0,44 l/s
- Pressure at flow 0,1 l/s:	16 kPa
- Pressure at flow 0,2 l/s:	62 kPa
- Pressure at flow 0,33 l/s:	169 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com