



Quality of life since 1825

Shower faucet Atlantic - thermostat

Lead-free - shower pack incl. shower set, 150 c-c

Product features

SAFE TOUCH



LEAD-FREE



- Energy class A, saves energy and water
- 3-function hand shower
- The shower set can be mounted with screws or glue

Article numbers

Art-no.
GB41215087 0

EAN
7393792232425

Packaging information

Length: 775 mm | Width: 145 mm | Height: 80 mm

Weight: 3.22 kg

Weight: 1 pc

Assembling & Care


Mounted according to the instructions. Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications



Technical information

- Max. tap capacity (at 300 kPa): 0,11 l/s
- Pressure loss with flow (0,1 l/s) 140 kPa
- CO2 Footprint: 19.74 kg
- Standard connection dimension: 150 c-c

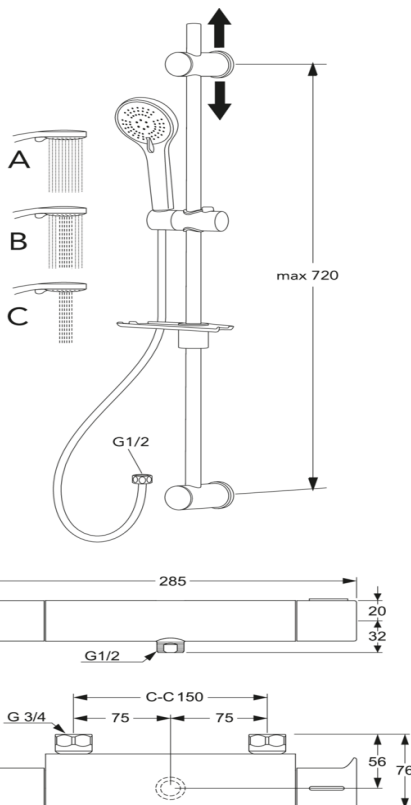


GUSTAVSBERG/

FLOW CHART/

ATLANTIC SHOWER KIT THERMOSTAT

GUSTAVSBERG /
SMARTER BATHROOMS

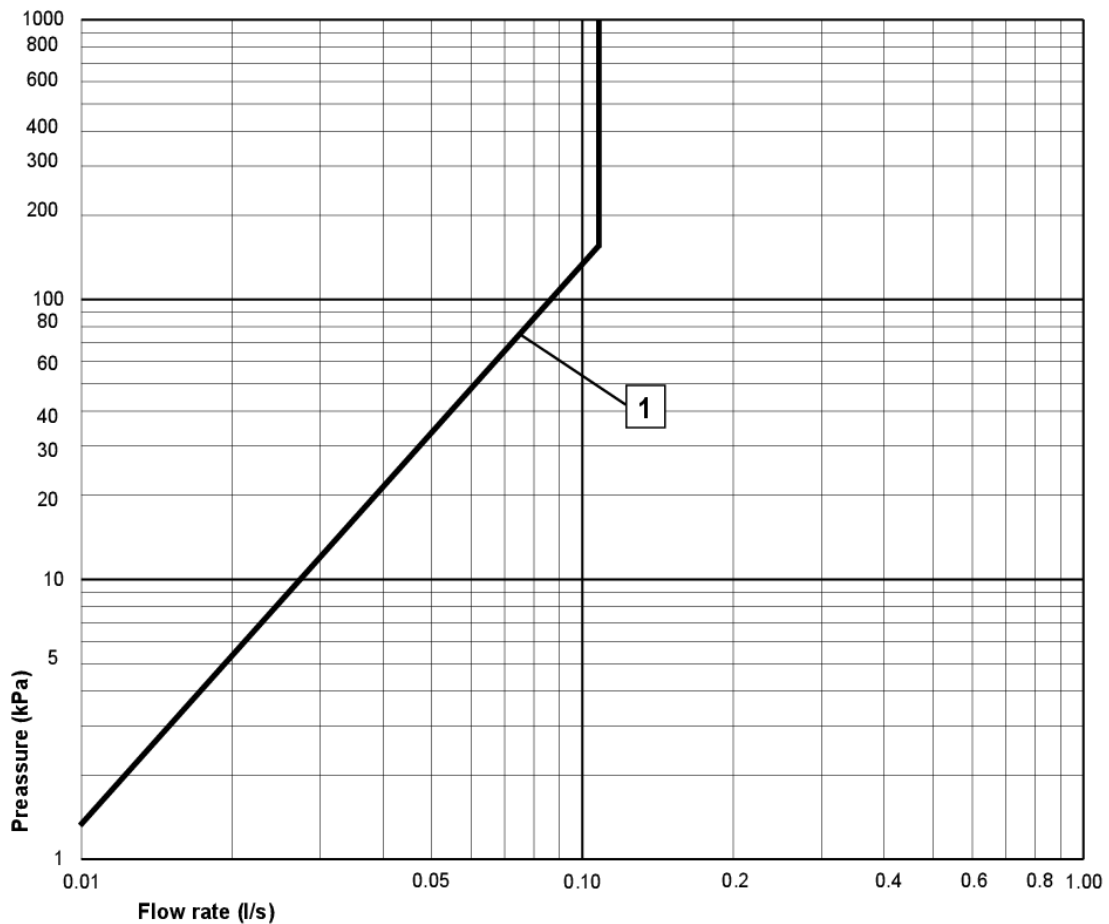

1 Shower flow

| | |
|------------------------------|----------|
| - Flowrate at 300 kPa: | 0,11 l/s |
| - Pressure at flow 0,1 l/s: | 140 kPa |
| - Pressure at flow 0,2 l/s: | NA |
| - Pressure at flow 0,33 l/s: | NA |



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com