



Quality of life since 1825

# Washbasin mixer Atlantic

With side spray and wall bracket

## Product features

- Lever with clear color marking for hot and cold
- Soft move, technology for smooth and precise handling
- Adjustable max temperature for scald protection

## Article numbers

Art-no.  
GB41215147

EAN  
7393792232364

## Packaging information

Length: 295 mm | Width: 285 mm | Height: 75 mm  
Weight: 1.75 kg  
Weight: 1 pc

## Assembling & Care


Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

## Energy labeling and certifications




## Technical information

- Max. tap capacity (at 300 kPa): 0,21 l/s
- Pressure loss with flow (0,1 l/s) 68 kPa

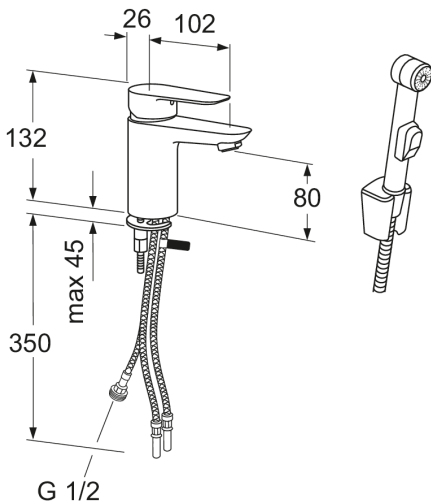

# Spare parts

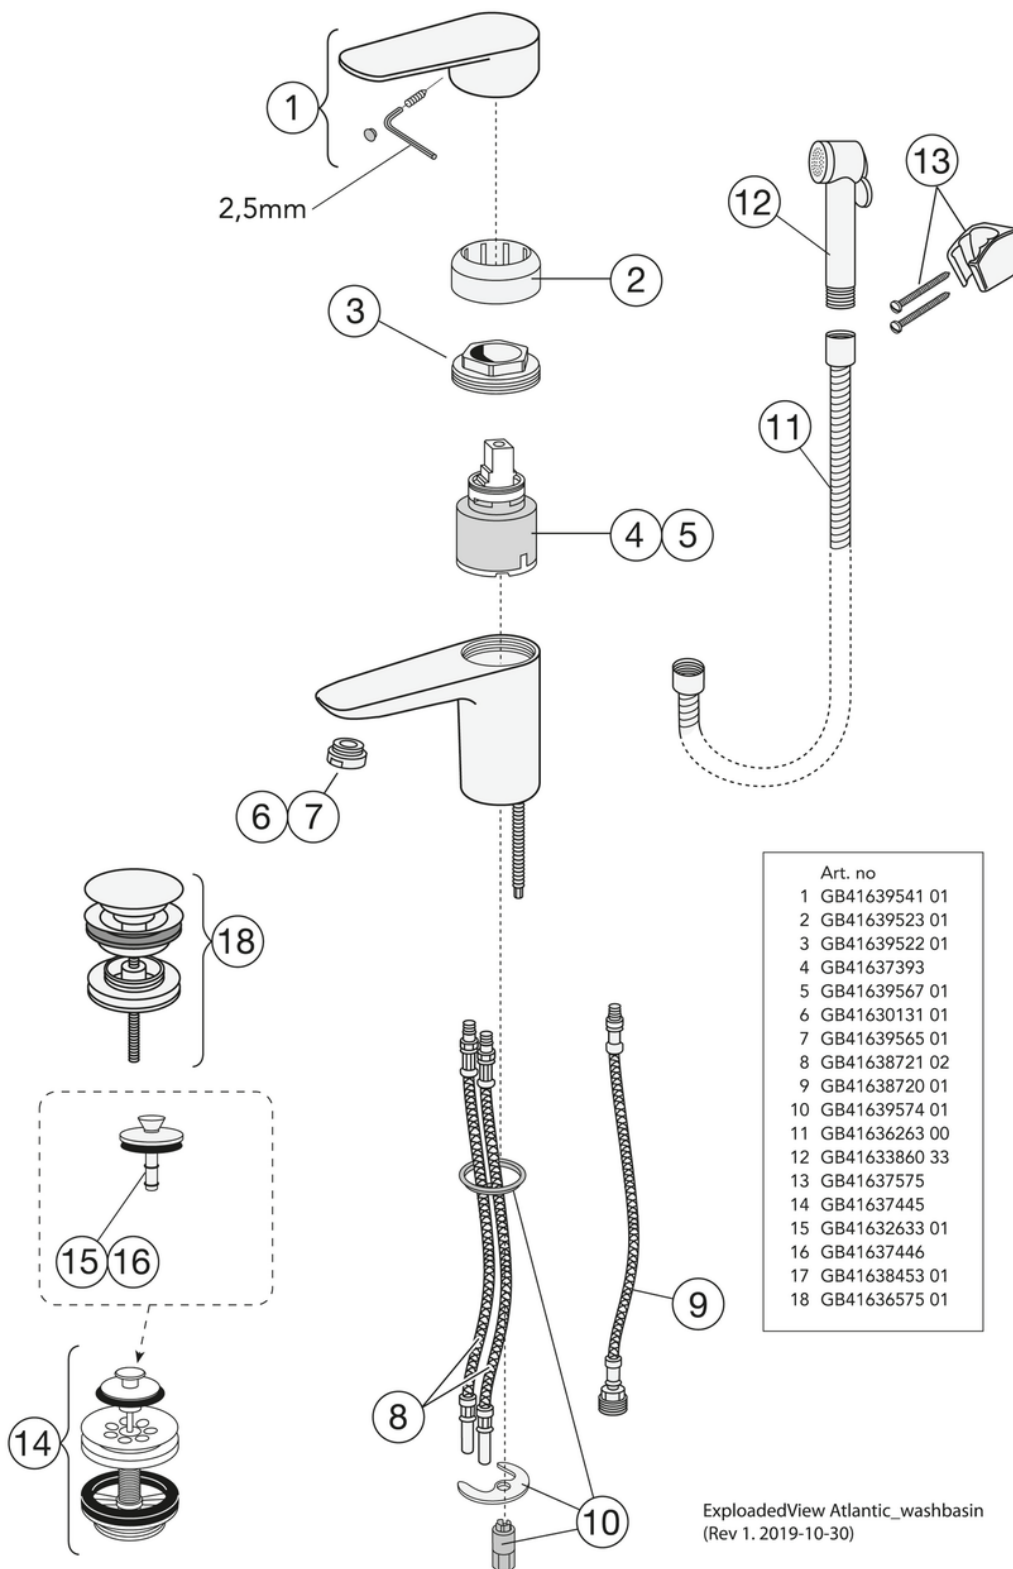


No.	Product	Art-no.
1	Lever, Atlantic	GB41639541 01
2	Cover	GB41639523 01
3	Nut - ceramic package	GB41639522 01
4	Ceramic package	GB41637393
5	Ceramic Cartridge	GB41639567 01
6	Aerator	GB41630131 01
7	Aerator	GB41639565 01
8	SoftPex hose	GB41638721 02
9	Softpex hose 300 mm	GB41638720 01
10	Mounting kit	GB41639574 01
11	Shower hose, Biflex	GB41636263 00
12	Hand shower	GB41633860 33
13	Hand shower fixing	GB41637575
14	Plug valve	GB41637445
18	Pushdown valve	GB41636575 01

# GUSTAVSBERG/

## FLOW CHART/

### ATLANTIC WASHBASIN MIXER, SIDE SPRAY

GUSTAVSBERG /  
SMARTER BATHROOMS

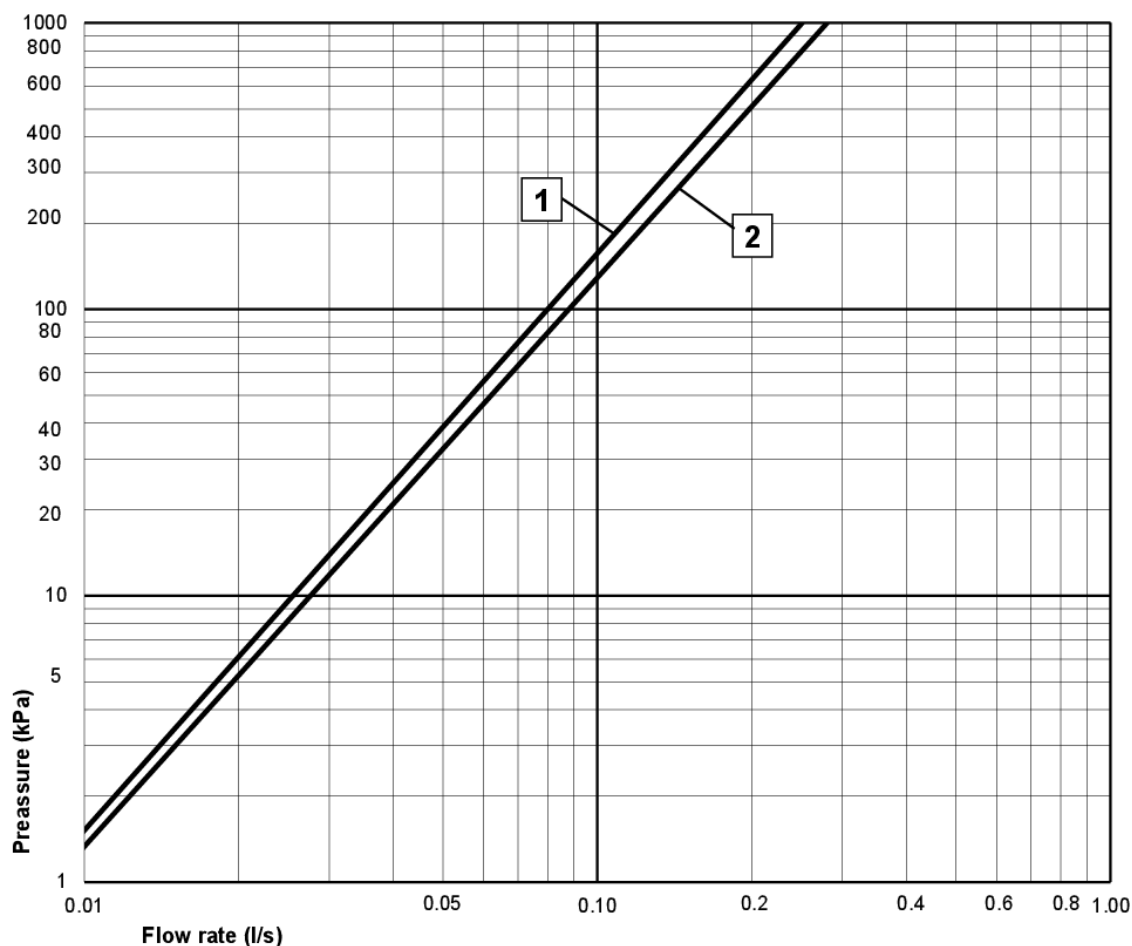

- 1** Max flow
- 2** Side spray

Valid for curve

- Flowrate at 300 kPa:	0,14 l/s
- Pressure at flow 0,1 l/s:	158 kPa
- Pressure at flow 0,2 l/s:	630 kPa
- Pressure at flow 0,33 l/s:	NA



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)