



Quality of life since 1825

Kitchen mixer Nordic Plus – spiraflex

.

Product features

- Design that makes cleaning of larger pots and buckets easier
- Two different flush modes (normal or spray)
- Lever with clear color marking for hot and cold water

Article numbers

Art-no.
GB41203758

EAN
7393792233255

Packaging information

Length: 600 mm | Width: 340 mm | Height: 80 mm
Weight: 4.11 kg
Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications



CERTIFIERING
KONTROLL








Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Technical information

- Max. tap capacity (at 300 kPa): 0,127 l/s
- Pressure loss with flow (0,2 l/s) 744 kPa

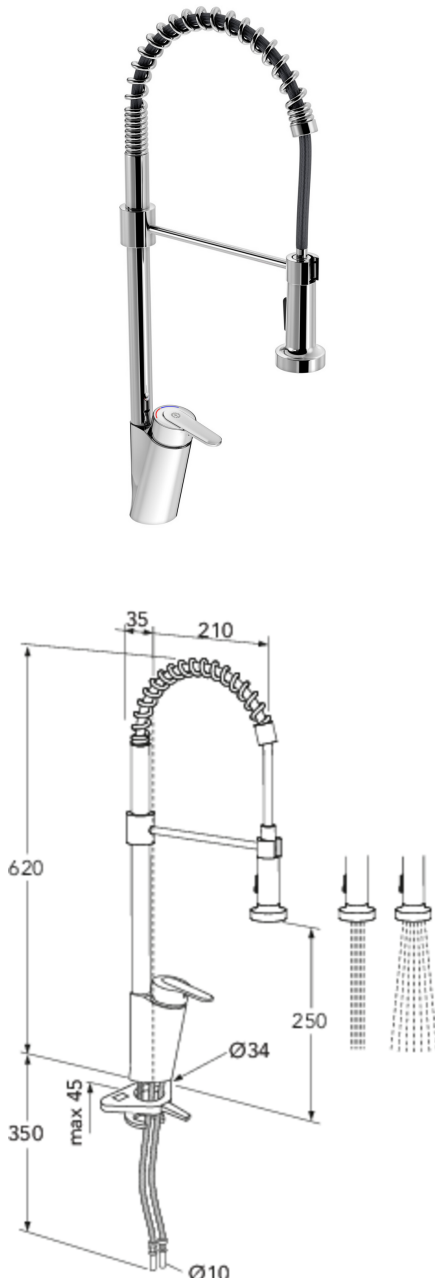

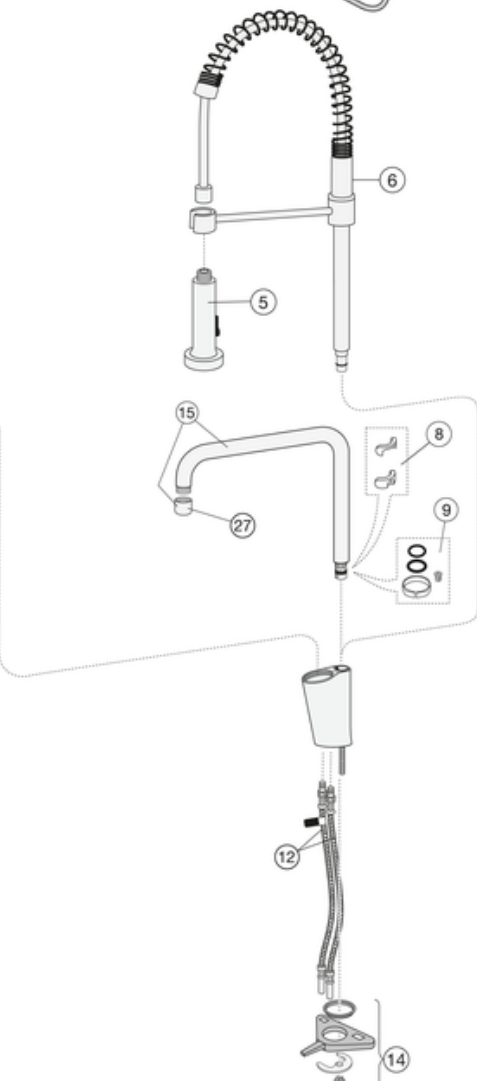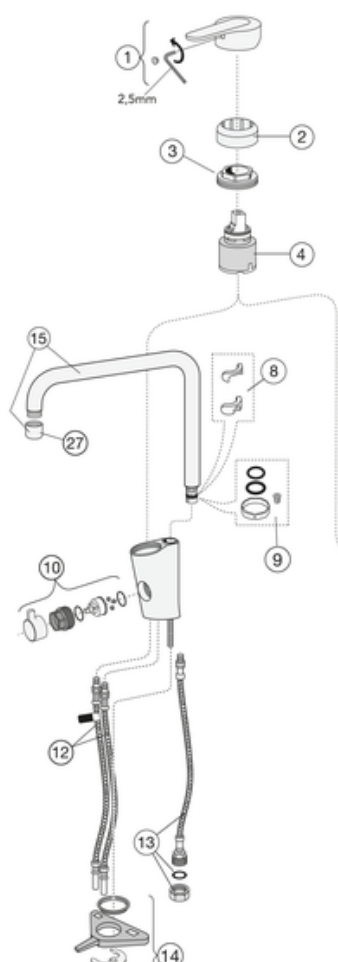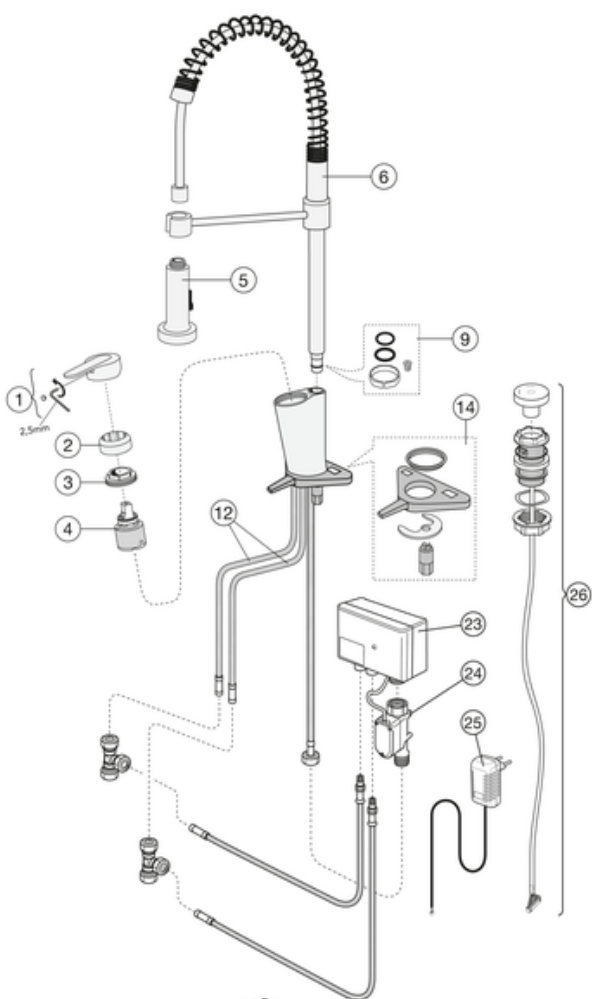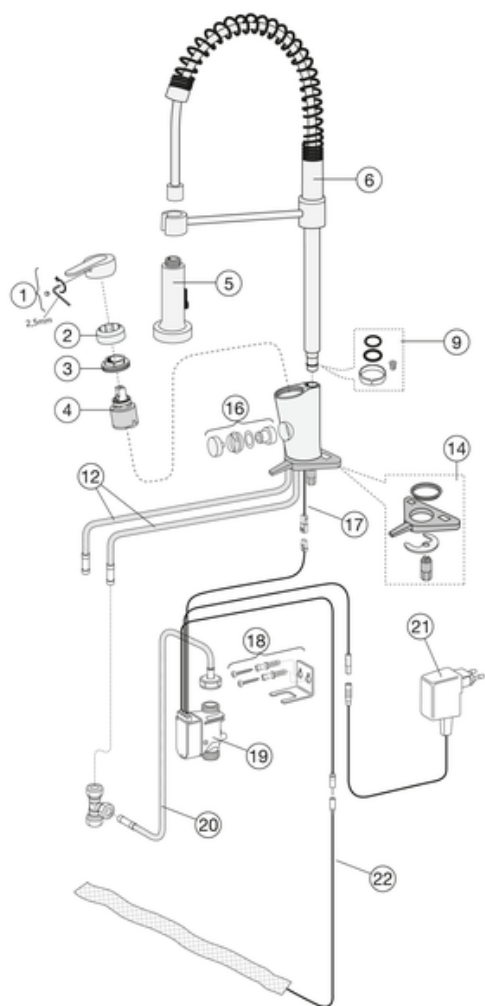


No.	Product	Art-no.
1	Lever, Nordic Plus (2019-)	GB41639625 01
2	Cover	GB41639523 01
3	Nut - ceramic package	GB41639522 01
4	Ceramic package	GB41637393
5	Shower handle	GB41638754 01
6	Spout	GB41638753 01
8	Swiveling limiter kit	GB41638450
9	O-ring set	GB41637010 01
10	Dishwasher shutdown	GB41639547 01
12	SoftPex hose	GB41638721 02
13	Softpex hose 440 mm	GB41638701 01
14	Mounting kit - kitchen mixer	GB41639573 01
15	Spout, Atlantic	GB41639540 01
16	Control or dishwasher shutdown	GB41639707 01
17	Cable for electronic dishwasher shutdown	GB41639678 01
18	Bracket for electronic dishwasher shutdown	GB41639681 01
21	Power adapter, 220 V for electronic dishwasher shutdown	GB41639683 01
24	Shut-off valve for duo	GB41639690 01
25	Power adapter, 220 V for duo	GB41639688 01
26	Control for duo	GB41639685 01
27	Aerator	GB41630129 01

GUSTAVSBERG/

FLOW CHART/

Kitchen mixer spiraflex Nordic plus

GUSTAVSBERG /
SMARTER BATHROOMS

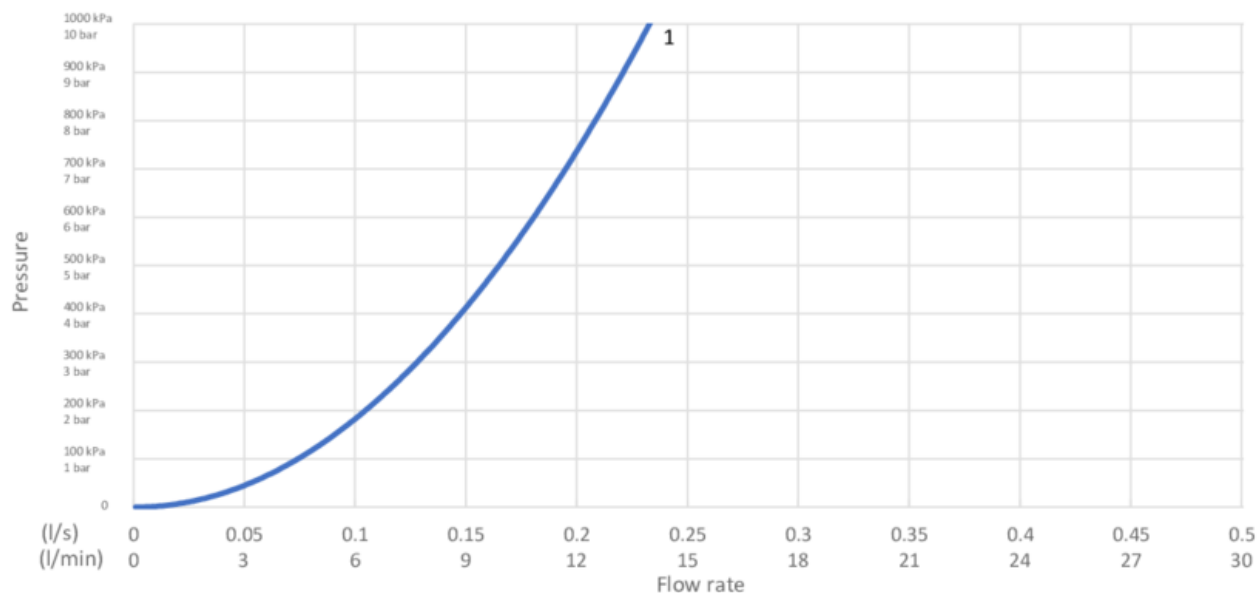

1. Max flow

1. Max flow

- Flowrate at 300 kPa:	0,127 l/s
- Pressure at flow 0,1 l/s:	186 kPa
- Pressure at flow 0,2 l/s:	744 kPa
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2020-11-11 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com