




Quality of life since 1825

Kitchen mixer Nordic Plus – spiraflex

With Duo-function

Product features

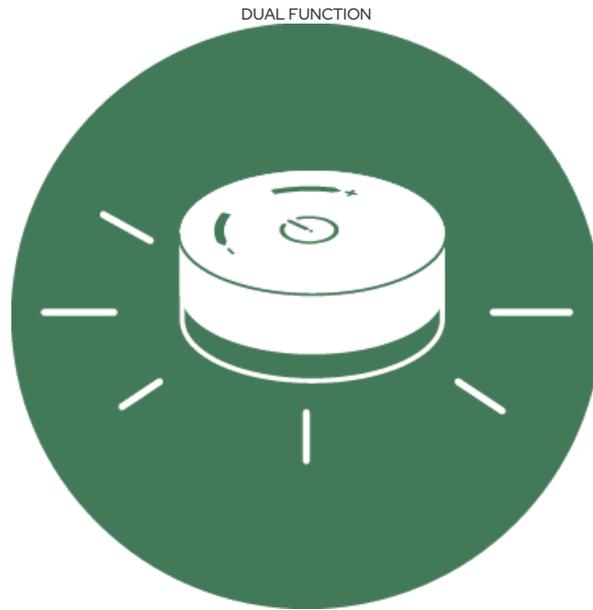

- Works as a standard mixer manually
- Fully digital with on / off, water flow and temperature regulation
- Soft move, technology for smooth and precise handling

Article numbers

Art-no.
GB41203782

EAN
7393792233279


Packaging information

Length: 600 mm | Width: 340 mm | Height: 80 mm
Weight: 5.5 kg
Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

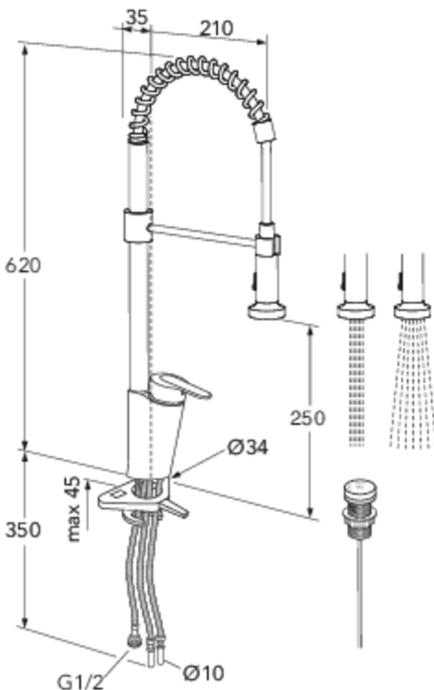



Technical information


- Max. tap capacity (at 300 kPa): 0,159 l/s
- Pressure loss with flow (0,2 l/s) 476 kPa

GUSTAVSBERG/

FLOW CHART/

Kitchen mixer spiraflex, DUO Nordic plus

GUSTAVSBERG /
SMARTER BATHROOMS

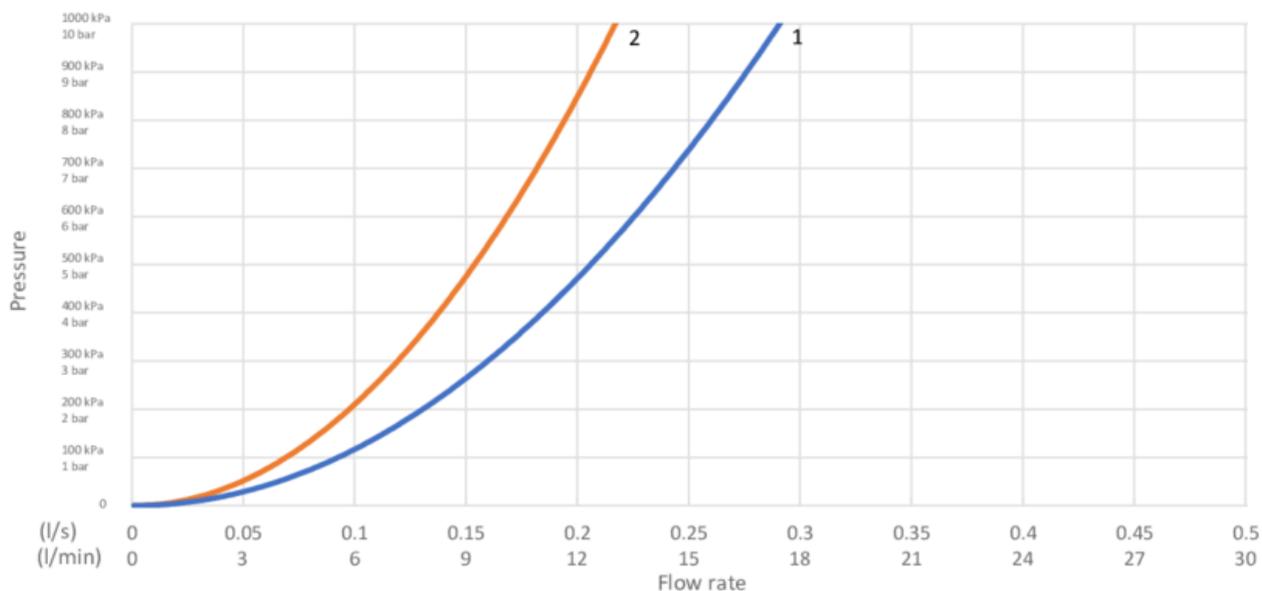

- 1. Lever
- 2. DUO

1. Lever		2. DUO	
- Flow rate at 300 kPa:	0,159 l/s	- Flow rate at 300 kPa:	0,118 l/s
- Pressure at flow 0,1 l/s:	119 kPa	- Pressure at flow 0,1 l/s:	214 kPa
- Pressure at flow 0,2 l/s:	476 kPa	- Pressure at flow 0,2 l/s:	857 kPa
- Pressure at flow 0,33 l/s:	N/A	- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2020-11-11 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com