



Quality of life since 1825

Shower column Atlantic Round

160 c-c

Product features

ECO-FLOW

SAFE TOUCH



- Water and energysaving; flow handshower 7,5 l/min, head shower 12 l/min
- Super slim round head shower Ø250 mm
- Can be combined with Gustavsberg bathtub spout

Article numbers

Art-no.
GB41205030

EAN
7393792233316

Packaging information

Length: 714 mm | Width: 368 mm | Height: 94 mm


Weight: 5.2 kg

Weight: 1 pc

Assembling & Care


Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications



Technical information

- Max. tap capacity (at 300 kPa): 0,20 l/s
- Pressure loss with flow (0,2 l/s) 235 kPa
- Standard connection dimension: 160 c-c

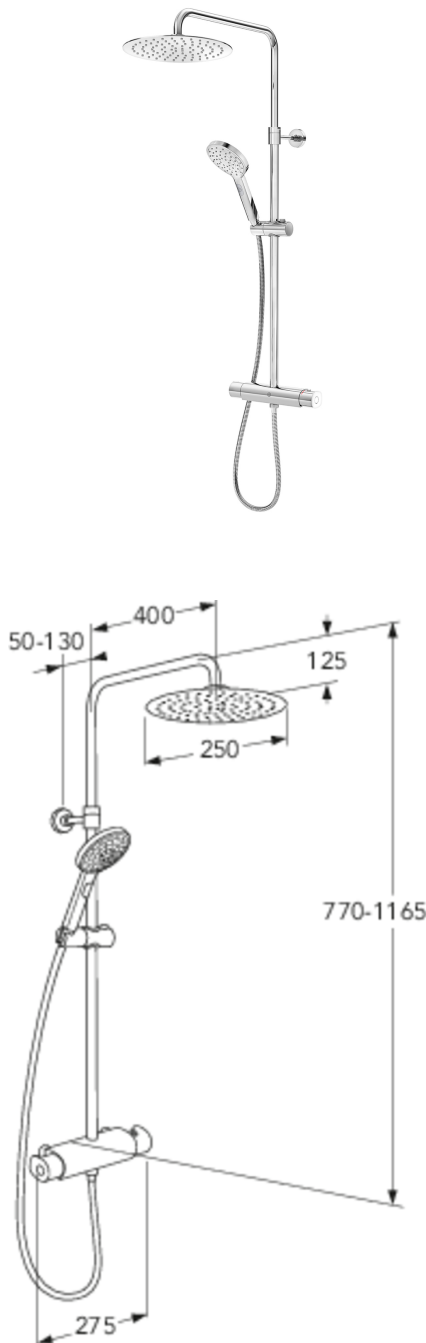


GUSTAVSBERG/

FLOW CHART/ATLANTIC

TERMOSTATIC MIXER GB41205030 / GB41215030

GUSTAVSBERG /
SMARTER BATHROOMS

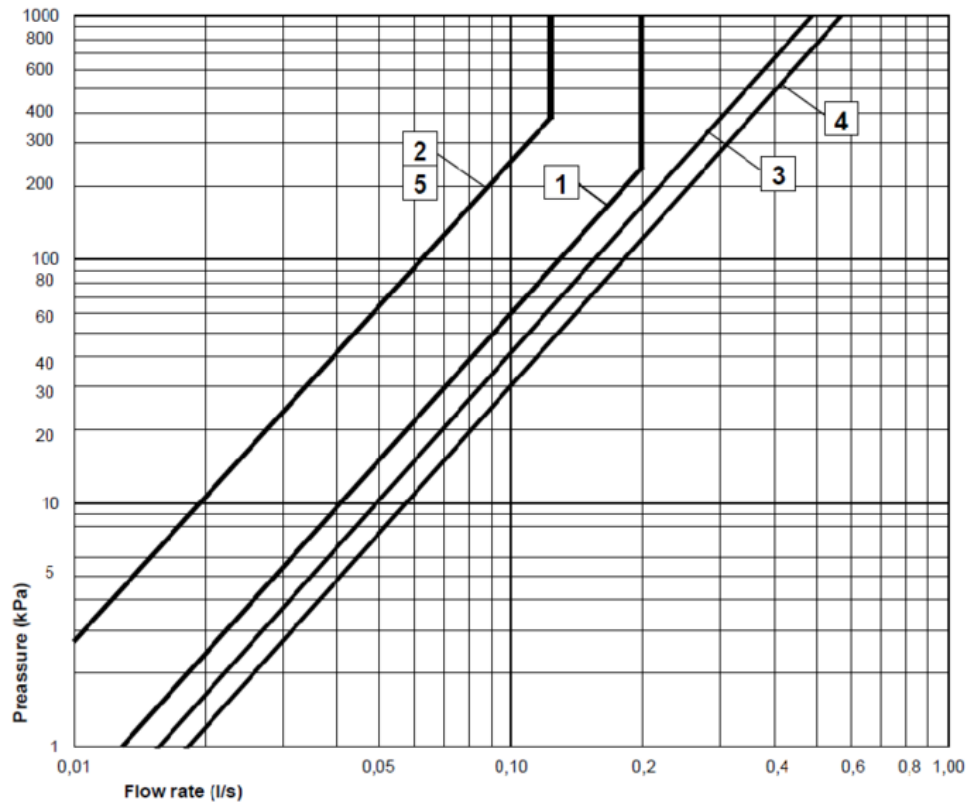

- 1** Head shower
- 2** Hand shower
- 3** Bathtub outlet, spout GB41638759
- 4** Bathtub outlet, spout GB41638760
- 5** Hand shower outlet, spouts GB41638759, GB41638760

Valid for curve **1**

Flow regulated: 0,2 l/s at 235 kPa

- Flowrate at 300 kPa:	0,20 l/s
- Pressure at flow 0,1 l/s:	59 kPa
- Pressure at flow 0,2 l/s:	235 kPa
- Pressure at flow 0,33 l/s:	NA

Valid for curve **2 5**

Flow regulated: 0,125 l/s at 390 kPa

- Flowrate at 300 kPa:	0,11 l/s
- Pressure at flow 0,1 l/s:	252 kPa
- Pressure at flow 0,2 l/s:	NA
- Pressure at flow 0,33 l/s:	NA

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com