



Quality of life since 1825

Peadušiga dušikomplekt Atlantic Round

150 c-c

Toote Omadused

ECO-FLOW

SAFE TOUCH



- Sästab vett ja energiat; käsiduši vooluhulk 7,5 l/min, peaduši vooluhulk 12 l/min
- Üliõhuke ümar peadušš, Ø 250 mm
- Saab kombineerida Gustavsbergi vannijooksutoruga

Article number

Art.nr.
GB41215030

EAN
7393792233309

Pakendiinfo

Pikkus: 714 mm | Laius: 368 mm | Kõrgus: 94 mm


Kaal: 5.2 kg

Number pakendis: 1 pc

Paigaldus ja hooldus


Enne paigaldamist tuleb torud kuni segistini loputada. Segisti on ühendatud paremalt külmaveetoruga ja vasakult kuumaveetoruga. Veearve: max 1000 kPa, min 50 kPa. Kuuma vee temperatuur: max 80 °C, min 45 °C. Me ei vastuta valest paigaldusest tuleneva kahju eest.

Energiamärgistus ja vastavustunnistused



Tehniline info

- Max. tap capacity (at 300 kPa): 0,20 l/s
- Pressure loss with flow (0,2 l/s) 235 kPa
- Ühenduse moodud: 150 c-c

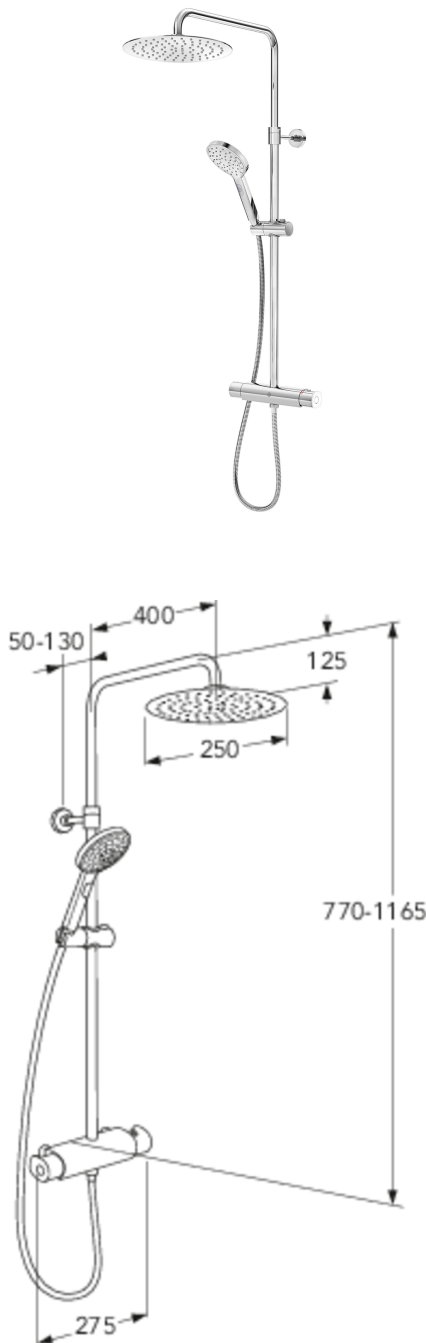


GUSTAVSBERG/

FLOW CHART/ATLANTIC

TERMOSTATIC MIXER GB41205030 / GB41215030

GUSTAVSBERG /
SMARTER BATHROOMS

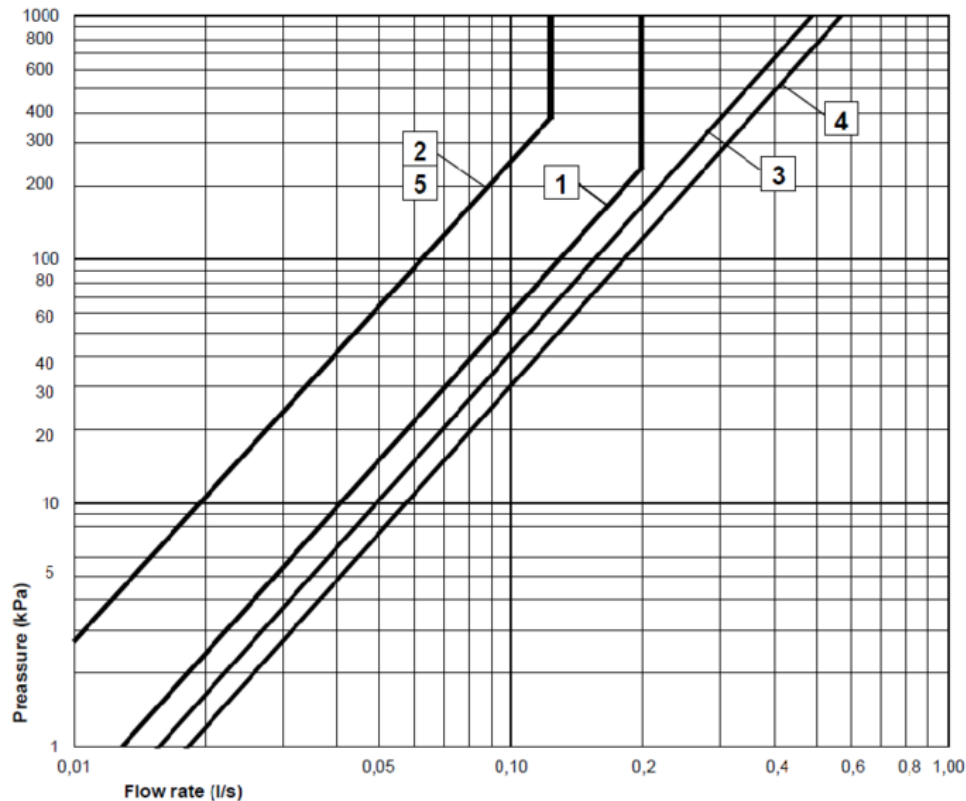

- 1** Head shower
- 2** Hand shower
- 3** Bathtub outlet, spout GB41638759
- 4** Bathtub outlet, spout GB41638760
- 5** Hand shower outlet, spouts GB41638759, GB41638760

Valid for curve **1**

Flow regulated: 0,2 l/s at 235 kPa

- Flowrate at 300 kPa:	0,20 l/s
- Pressure at flow 0,1 l/s:	59 kPa
- Pressure at flow 0,2 l/s:	235 kPa
- Pressure at flow 0,33 l/s:	NA

Valid for curve **2 5**

Flow regulated: 0,125 l/s at 390 kPa

- Flowrate at 300 kPa:	0,11 l/s
- Pressure at flow 0,1 l/s:	252 kPa
- Pressure at flow 0,2 l/s:	NA
- Pressure at flow 0,33 l/s:	NA

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com