



Quality of life since 1825

Shower mixer Care

Lead-free -elongated lever/knob, 150 c-c

Product features

SAFE TOUCH



LEAD-FREE



- Safe Touch reduces heat on the front of the faucet
- Contains less than 0.1% lead
- Can be complemented with bathtub spout

Article numbers

Art-no.
GB41215304 067

EAN
7393792232098

Packaging information

Length: 290 mm | Width: 290 mm | Height: 75 mm


Weight: 1.92 kg

Weight: 1 pc

Assembling & Care

Mounted according to the instructions. Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.


Energy labeling and certifications



Technical information

- Max. tap capacity (at 300 kPa): 0,46 l/s
- Pressure loss with flow (0,2 l/s) 57 kPa
- CO2 Footprint: 9 kg
- Standard connection dimension: 150 c-c



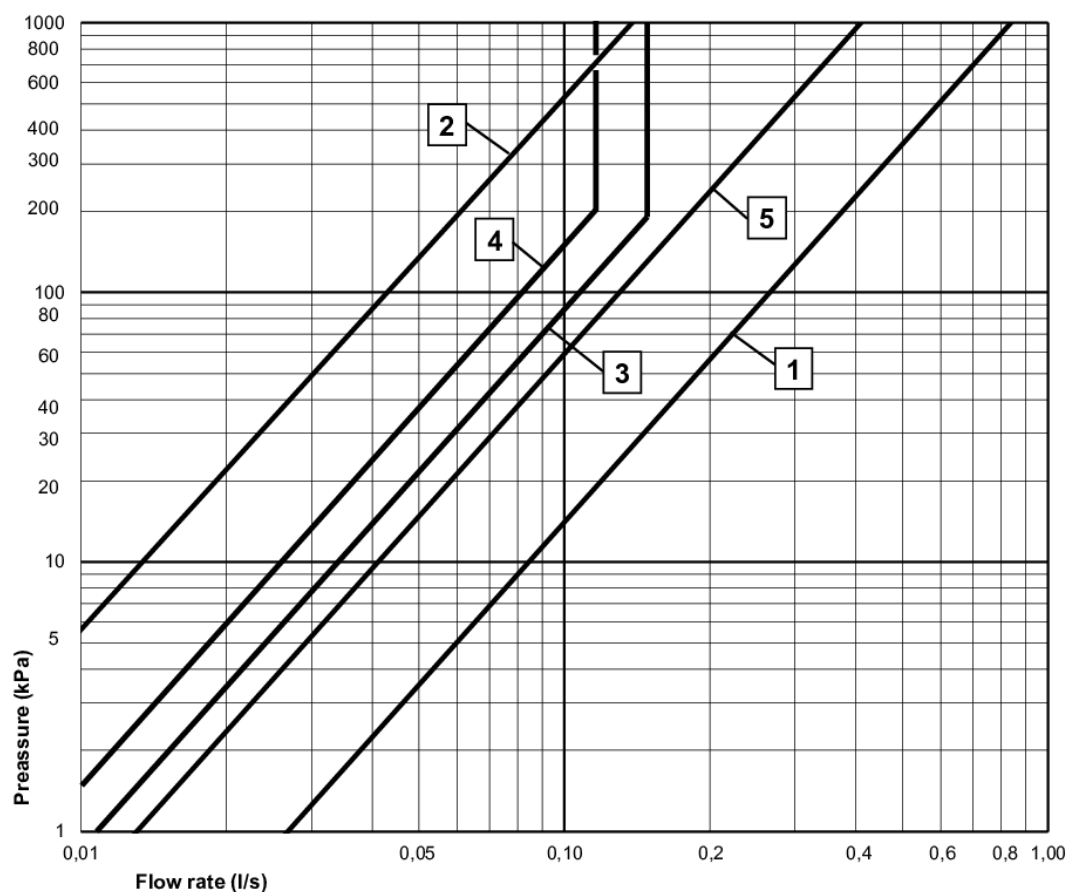

- 1** Max flow (bath- and shower outlet)
- 2** Comfort flow
- 3** Shower set GB41103214
- 4** Shower set GB41103214 0, GB41103216 0
- 5** Shower set GB41103216

Valid for curve **1**

- Flowrate at 300 kPa:	0,46 l/s
- Pressure at flow 0,1 l/s:	14 kPa
- Pressure at flow 0,2 l/s:	57 kPa
- Pressure at flow 0,33 l/s:	155 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com