



Quality of life since 1825



Dušisegisti Care – termostaat

Pliivaba – dušiühendusega all ja pikendatuda
kahva/nupuga, 150 c-c

Toote Omadused

SAFE TOUCH



PLIIVABA



- Safe Touch tehnoloogia vähendab segisti esikülje kuumenemist
- Pliisisaldus väiksem kui 0,1%
- Saab komplekteerida vanni jooksuruga

Article number

Art.nr.
GB41215304 067

EAN
7393792232098

Pakendiinfo

Pikkus: 290 mm | Laius: 290 mm | Kõrgus: 75 mm

Kaal: 1.92 kg

Number pakendis: 1 pc

Paigaldus ja hooldus

Paigaldada vastavalt juhiste. Enne paigaldamist tuleb torud kuni segistini loputada. Segisti on ühendatud paremalt külmaveetoruga ja vasakult kuumaveetoruga. Veasure: max 1000 kPa, min 50 kPa. Kuuma vee temperatuur: max 80 °C, min 45 °C. Me ei vastuta valest paigaldusest tuleneva kahju eest.

Energiamärgistus ja vastavustunnistused



Tehniline info


- Max. tap capacity (at 300 kPa): 0,46 l/s
- Pressure loss with flow (0,2 l/s) 57 kPa
- CO2e jalajälg: 9 kg
- Ühenduse mõõdud: 150 c-c

GUSTAVSBERG/

FLOW CHART/

THERMOSTATIC BATHTUB AND SHOWER MIXER CARE

GUSTAVSBERG /
SMARTER BATHROOMS

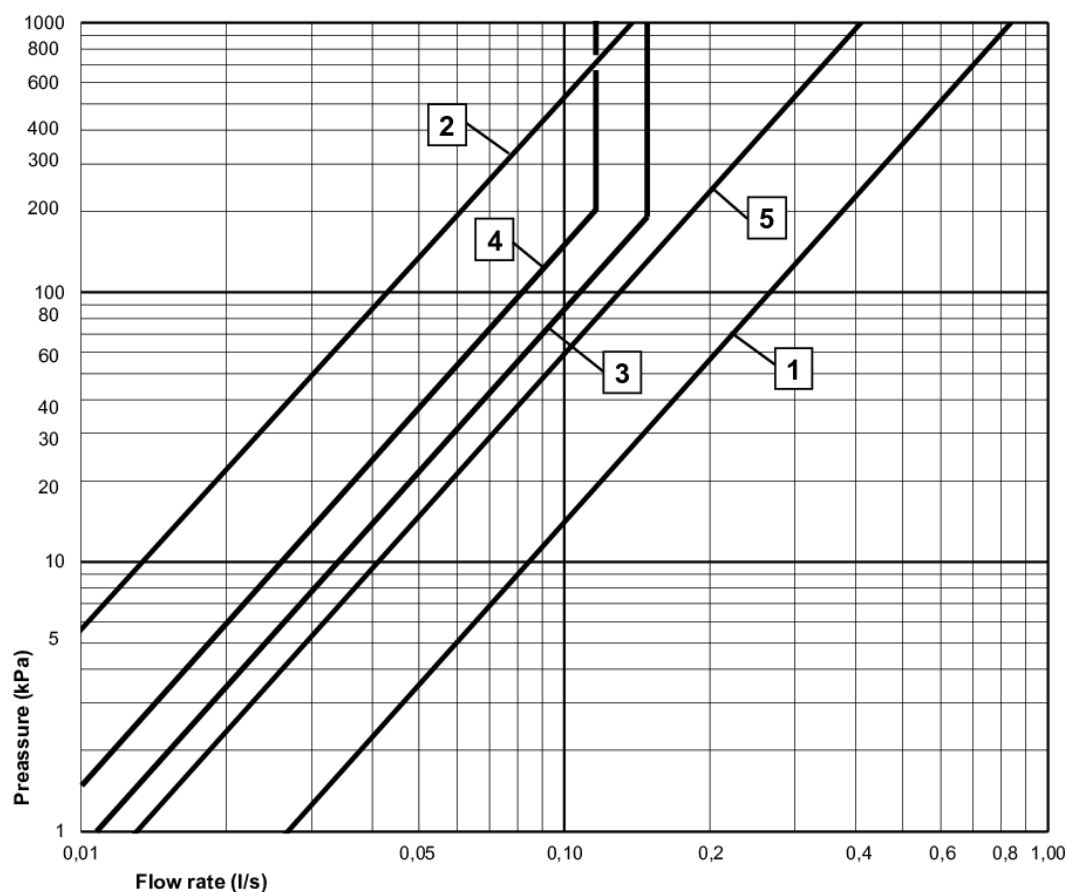

- 1** Max flow (bath- and shower outlet)
- 2** Comfort flow
- 3** Shower set GB41103214
- 4** Shower set GB41103214 0, GB41103216 0
- 5** Shower set GB41103216

Valid for curve **1**

- Flowrate at 300 kPa:	0,46 l/s
- Pressure at flow 0,1 l/s:	14 kPa
- Pressure at flow 0,2 l/s:	57 kPa
- Pressure at flow 0,33 l/s:	155 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com