



Quality of life since 1825



Bathroom sink faucet Metic

Mini.

Product features

ECO-FLOW



- Modern design
- Low model for smaller washbasins
- Ceramic cartridge ensures non-drip operation and longevity

Article numbers

Art-no.
GB41213851

EAN
7393792232838

Packaging information

Length: 280 mm | Width: 260 mm | Height: 90 mm

Weight: 1.68 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




CERTIFYING
KONTROLL

R
L
S
E




Technical information

- Max. tap capacity (at 300 kPa): 0,083 l/s
- Pressure loss with flow (0,1l/s) 263 kPa

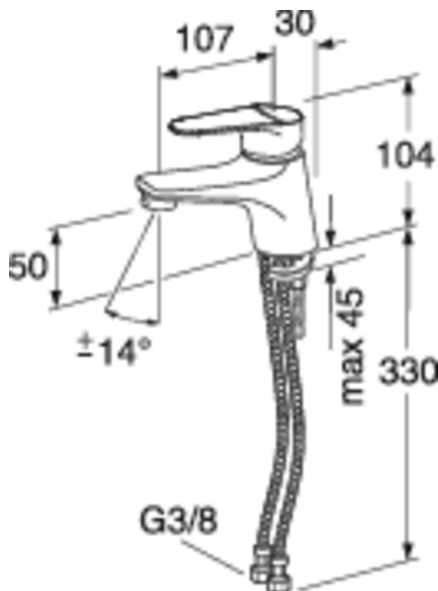

Spare parts

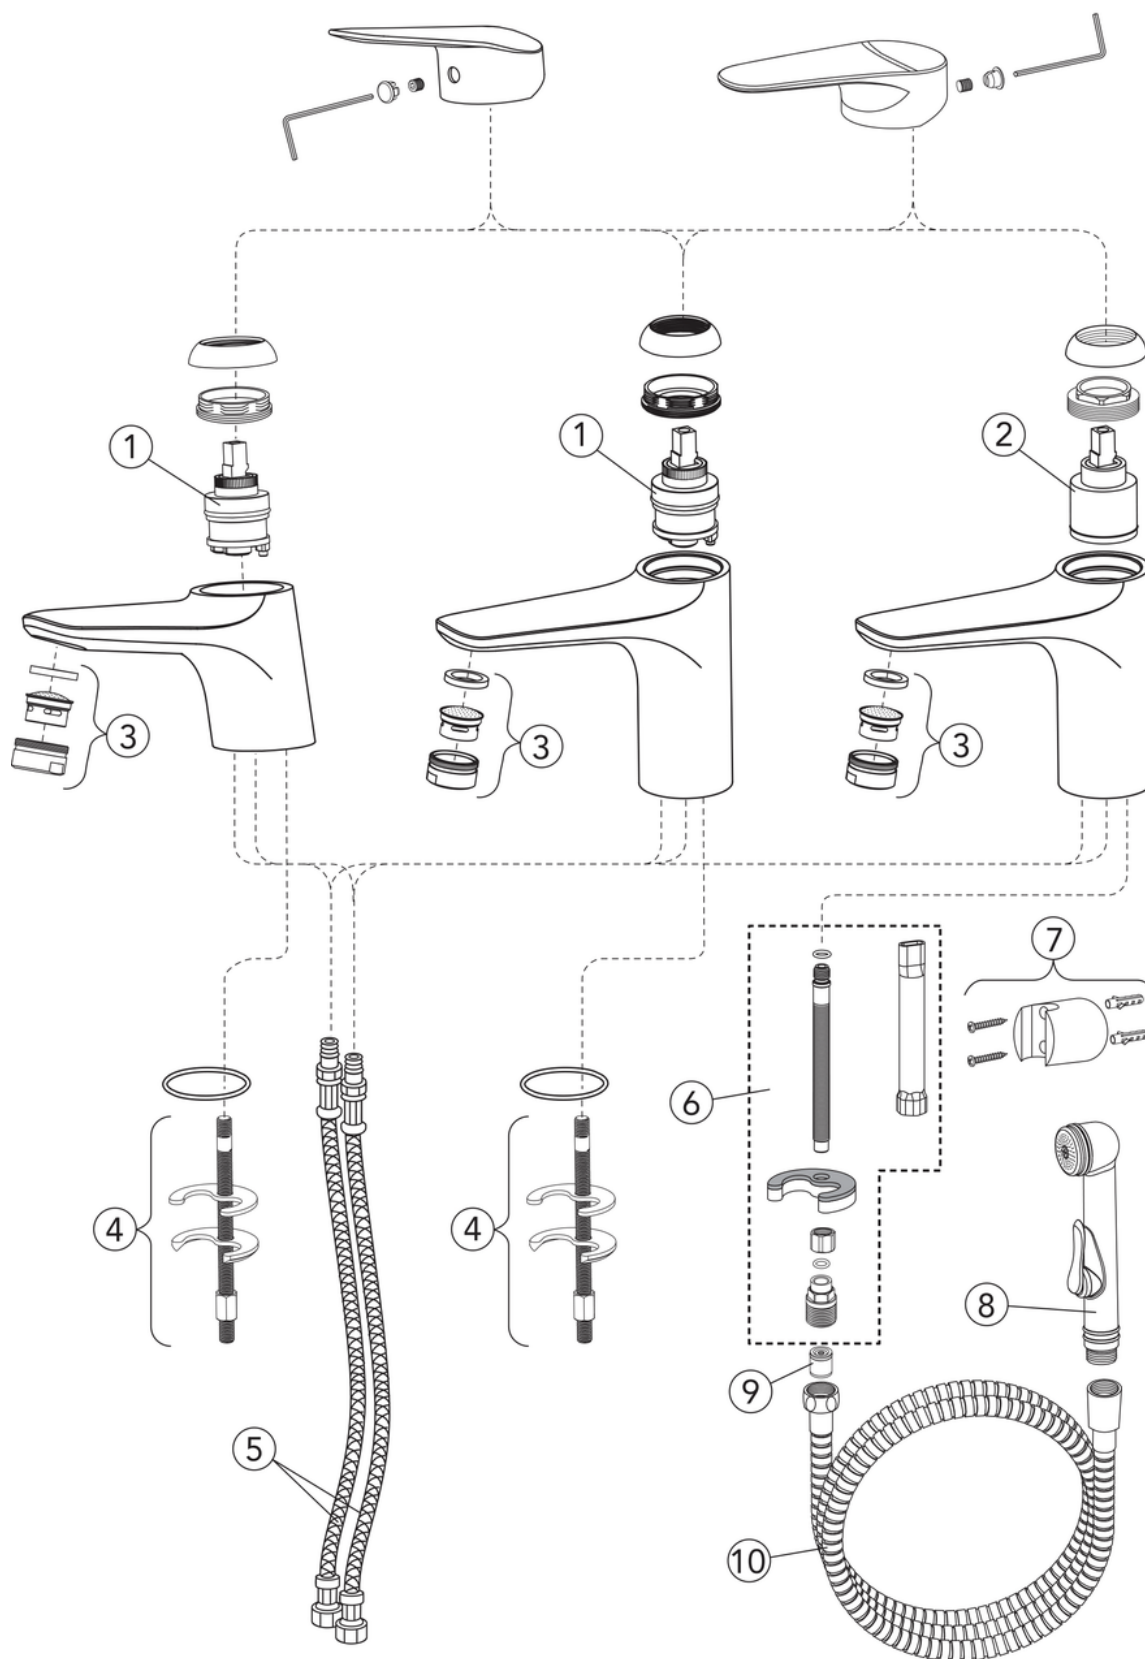


No.	Product	Art-no.
1	Package, Metic/Dynamic	GB41639629 01
2	Ceramic package	GB41637393
3	Aerator	GB41630131 01
4	Mounting kit	GB41639627 01
5	SoftPex hose	GB41636629 01
6	Mounting kit, hand shower	GB41639628 01
7	Hand shower fixing	GB41637575
8	Hand shower	GB41633860 33
10	Shower hose, Biflex	GB41636263 00

GUSTAVSBERG/

FLOW CHART/

Washbasin mixer Metic

GUSTAVSBERG /
SMARTER BATHROOMS

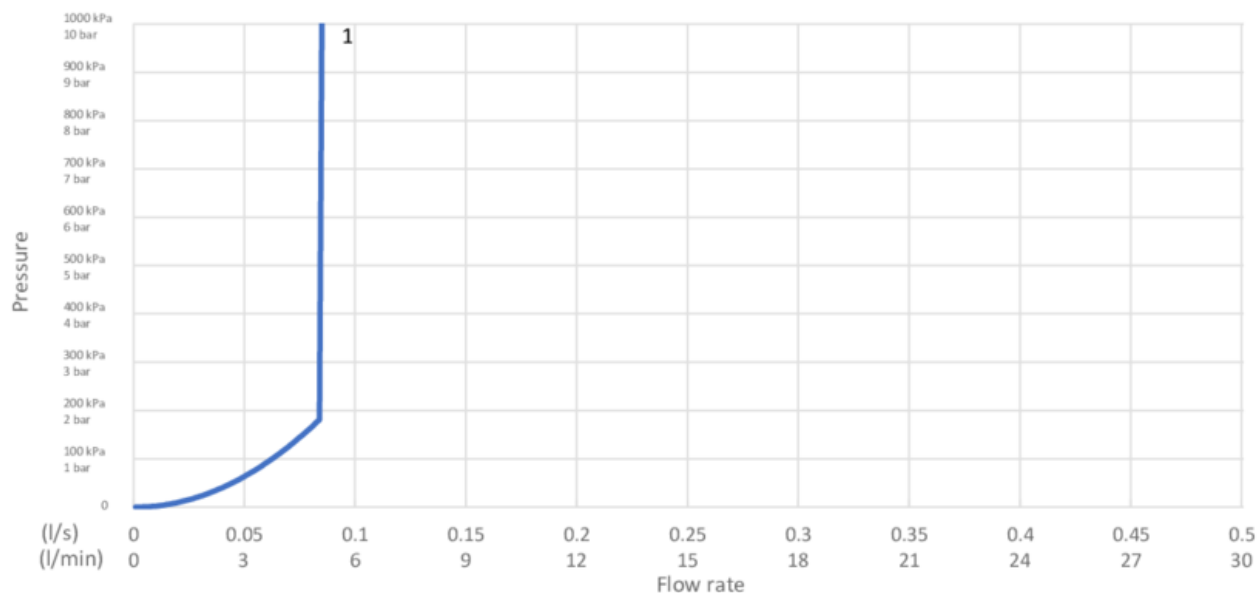

1. Max flow

1. Max flow

- Flowrate at 300 kPa:	0,083 l/s
- Pressure at flow 0,1 l/s:	263 kPa
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2020-11-11 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com