




Quality of life since 1825

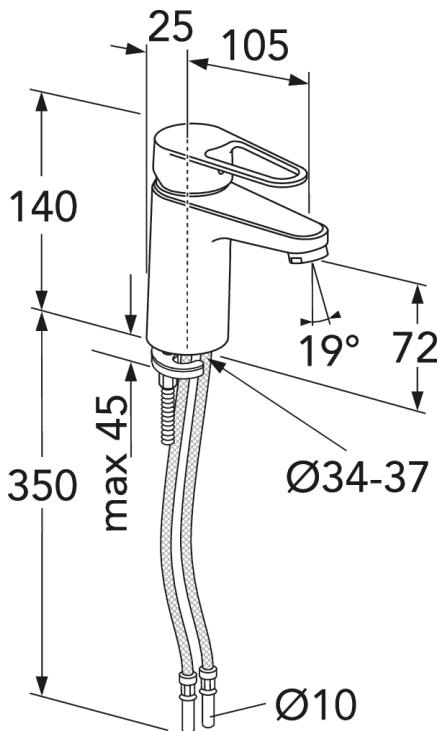

Produktegenskaber

SMART INSIDE



ECO-FLOW



ECO-STOP



COLD-START



HURTIG
MONTERING



- Contains less than 0.1% lead
- Energy Class A
- Cold-start, only cold water when the lever is in straight forward position

Artikel nummer

VVS-nr.
701617604

Art-nr.
GB41216047060

EAN
7393792235020

Emballage

Længde: 800 mm | Bredde: 600 mm | Højde: 555 mm

Vægt: 70 kg

Antal i emballage: 60 st

Montering & Rengøring

Før installation skal ledningerne skylles rene frem til armaturet. Armaturet tilsluttes med koldtvarsledning til højre og varmtvarsledning til venstre. Vandtryk: maks. 1000 kPa. Varmtvandstemperatur: maks. 70°C, min 45°C. Vi fralægger os ethvert ansvar for fejl opstået pga. fejlmontering.

Energimærkning og certificeringer



Teknisk information


- Max. tap capacity (at 300 kPa): 0,074 l/s
- CO₂-aftryk: 5,49 kg
- Tilslutningsdimension: 10mm

GUSTAVSBERG/

FLOW CHART/

Washbasin mixer, energy class A New Nautic

GUSTAVSBERG /
SMARTER BATHROOMS

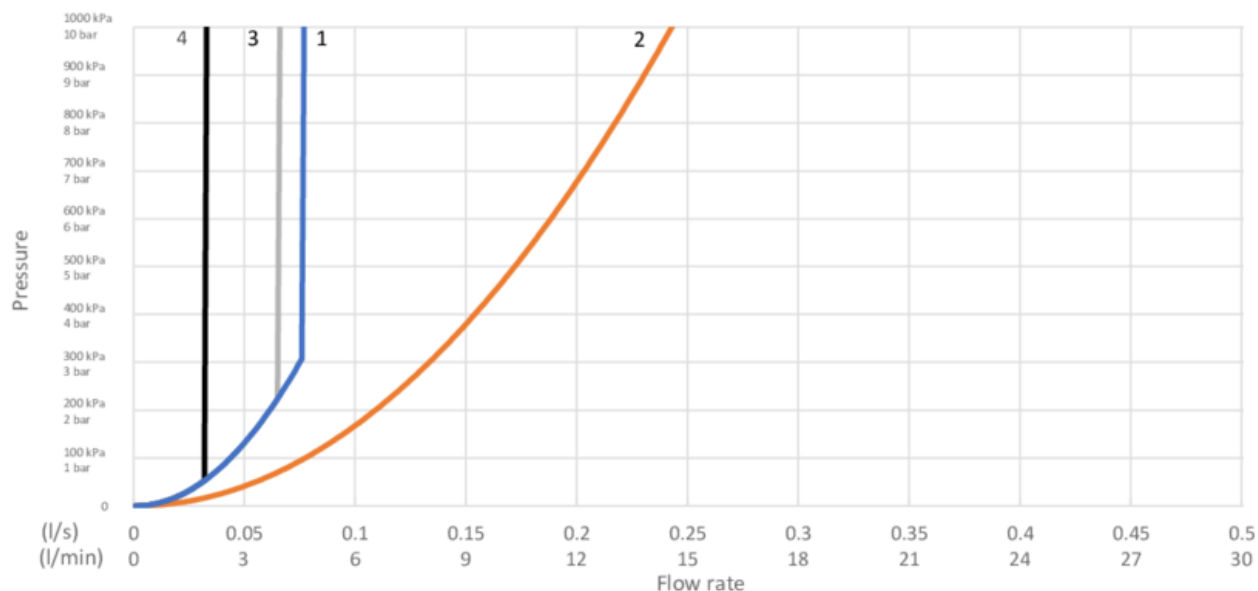

- 1. Max flow
- 2. Side spray
- 3. Optional aerator GB41638662 10

- 4. Optional aerator GB41638663 10

1. Max flow

- Flowrate at 300 kPa:	0,074 l/s
- Pressure at flow 0,1 l/s:	N/A
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 2, 2020-12-21 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com