



Quality of life since 1825

Praustuvo maišytuvas „New Nautic“, 150 mm snapas

Su šoniniu purkštuku, sieniniu laikikliu ir uždarymo vožtuvu

Produkto savybės

EKO-SRAUTAS
(ECO-FLOW)

ECO-STOP

PRADŽIA SU
ŠALTU
VANDENIU
(COLD-START)

SMART INSIDE

GREITAS
SURINKIMAS



- Mažiau nei 0,1 % švino
- A energijos klasė
- Šaltasis paleidimas; pakėlus rankeną į aukščiausią padėtį teka tik šaltas vanduo

Prekės numeris

Art.nr.
GB41216185

EAN
7393792235075

Informācija par iepakojumu

Ilgis: 290 mm | Plotis: 290 mm | Aukštis: 75 mm


Svars: 3.32 kg

Numurs iepakojumā: 1 pc

Surinkimas ir priežiūra


Enne paigaldamist tuleb torud kuni segistini puhtaks loputada. Segisti ūhendatakse paremalt külma- ja vasakult kuumaveetoruga. Veesurve: maksim. 1000 kPa. Kuuma vee temperatuur: maksim. 80°C.

Energijos klasės etiketė ir sertifikatai



Tehniskā informācija


- Max. tap capacity (at 300 kPa): 0,065 l/s
- Standartinės jungties matmuo: 10mm

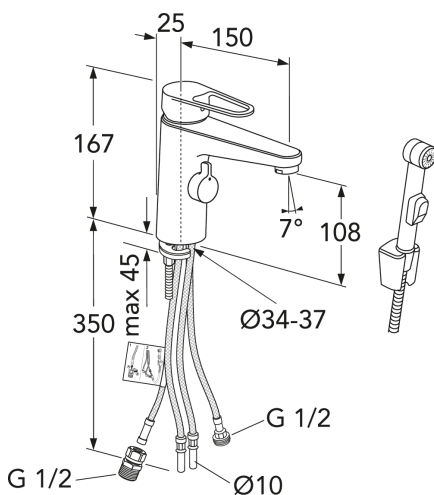

GUSTAVSBERG/

FLOW CHART/

Washbasin mixer multi, energy class A

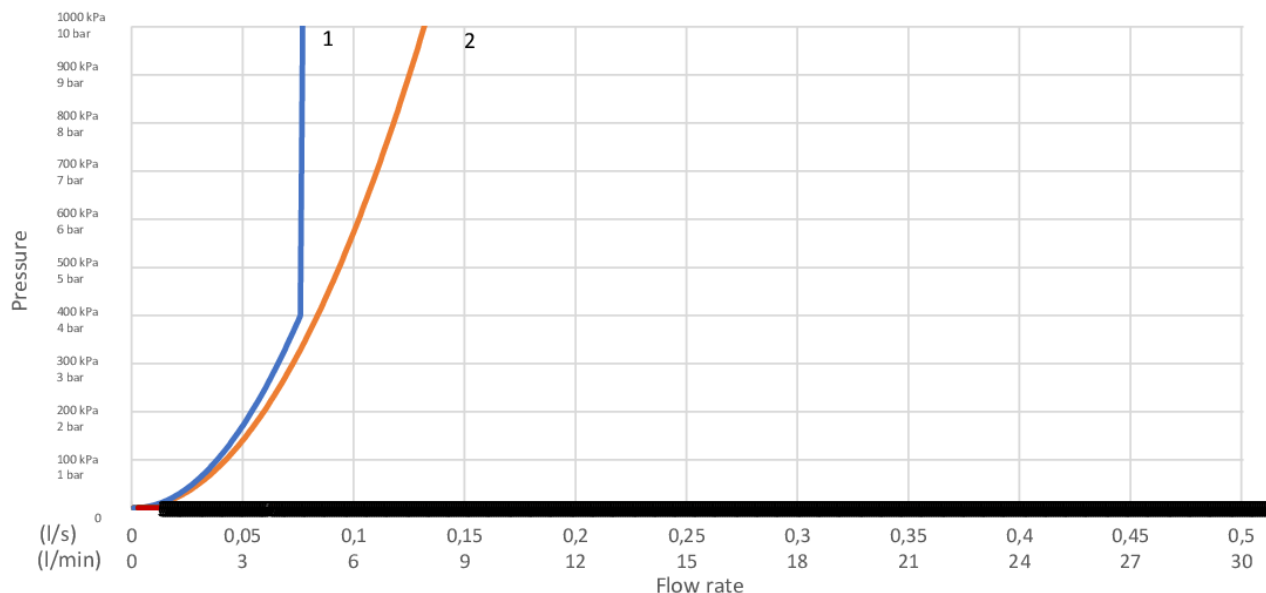

- 1. Max flow
- 2. Side Spray

1. Max flow

- Flowrate at 300 kPa:	0,065 l/s
- Pressure at flow 0,1 l/s:	N/A
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

2. Side Spray

- Flowrate at 300 kPa:	0,072 l/s
- Pressure at flow 0,1 l/s:	N/A
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 2, 2026-03-30 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com