



Quality of life since 1825

# Wall-hung toilet Public 6622 – with cistern, Hygienic Flush

4 Litre, no seat, C+

## Product features



- Durable stainless steel push button suitable for public environments
- Open flush edge for simplified cleaning
- Ceramicplus for quick and eco-friendly cleaning

## Article numbers

Art-no.  
GB1166224R1503

EAN  
7391530074993

## Packaging information

Length: 900 mm | Width: 360 mm | Height: 900 mm

Weight: 32 kg


Weight: 1 pc

## Assembling & Care

Mounted with bolts directly on the wall. Washers, bushings and nuts included (M12) but not bolts. Bolt projection from finished wall must be  $60 \pm 2$  mm. Rubber bellows for waste pipe connection included. See supplied installation instructions and mounting kit for each toilet. Triomont fixture for wall hung toilet and bidet RSK 382 57 56, is recommended for installation on weak walls. According to the AMA the seat height should be 450 mm which corresponds to 270 mm distance (centre-centre) between the existing floor and the centre of the drain.


## Energy labeling and certifications

- The product follows AMA recommendations, SS-EN 33 dimensioning and SS-EN 997 function
- Complies with Safe Water installation requirements
- CE approved



## Technical information

- CO2 Footprint: 74.33 kg
- Flushing - water quantity: 4 Enkelspolning 4 (L) Dual flush 4/2 (L)

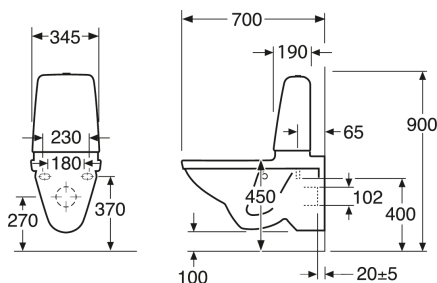


- Trap à Outlet: Wall connection
- Standard connection dimension: c/c 155mm sitsfäste



SMARTER  
BATHROOMS

# FLOW CHART

FILL VALVE - 9GN00100

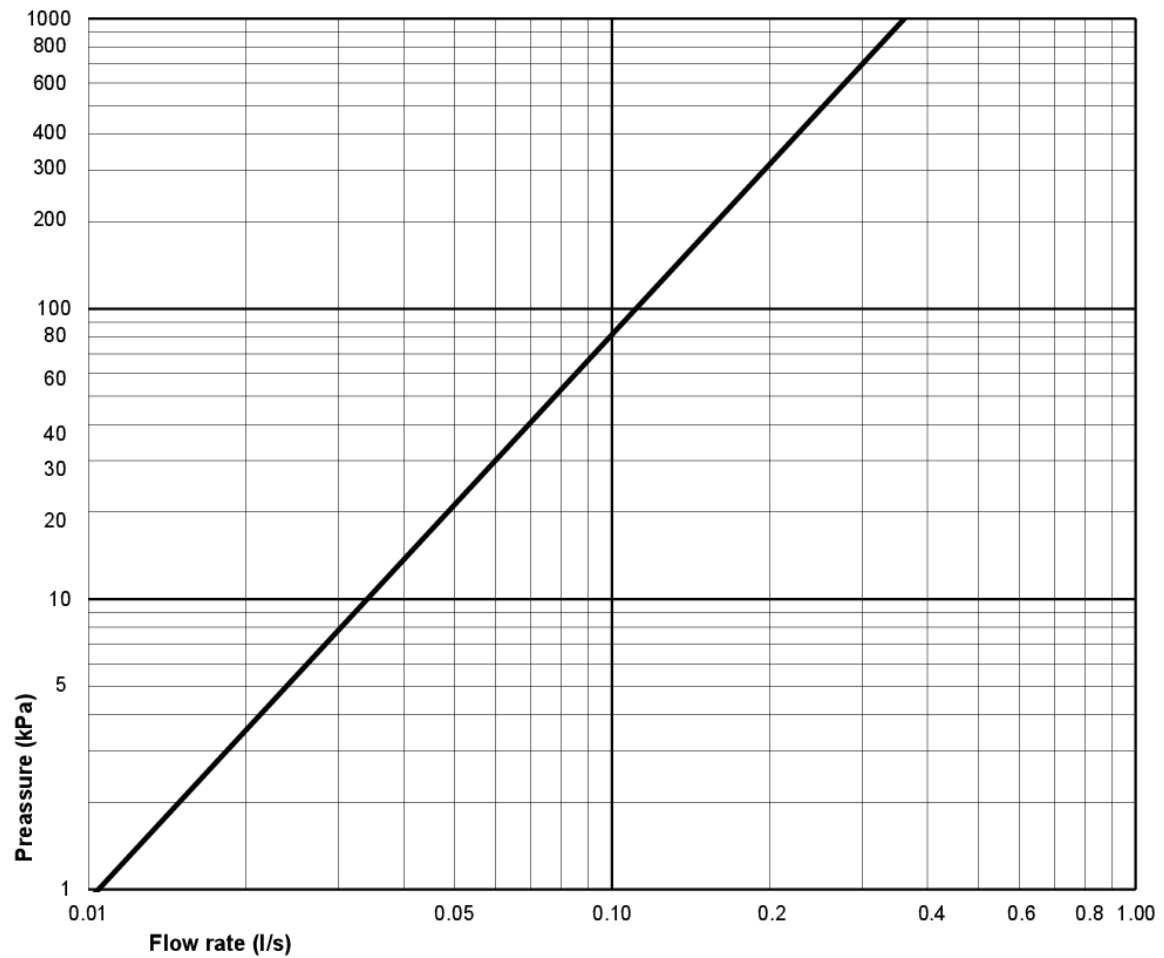

A MEMBER OF THE  
VILLEROY & BOCH GROUP

Villeroy & Boch Gustavsberg AB  
Box 400, 134 29 Gustavsberg  
Phone +46 (0)8-570 391 00  
[www.gustavsberg.com](http://www.gustavsberg.com) | [info@gustavsberg.com](mailto:info@gustavsberg.com)