



Quality of life since 1825

# Shower mixer Atlantic – thermostat 40 c-c

With shower connection down, 40 c-c

## Product features

SMART INSIDE

SAFE TOUCH



- 40 c-c for mounting with external pipes
- Continuous pipe connection
- Safe Touch function minimizes the heat on the front of the mixer

## Article numbers

Art-no.  
GB41201404

EAN  
7391530076423

## Packaging information

Length: 292 mm | Width: 95 mm | Height: 74 mm

Weight: 1.91 kg

Weight: 1 pc

## Assembling & Care


Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

## Energy labeling and certifications




## Technical information

- Max. tap capacity (at 300 kPa): 0,425 l/s
- Pressure loss with flow (0,33 l/s) 181 kPa
- CO2 Footprint: 5.24 kg
- Standard connection dimension: 40 c-c

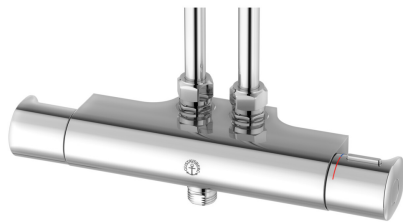

# GUSTAVSBERG/

## FLOW CHART/ Thermostatic Mixers

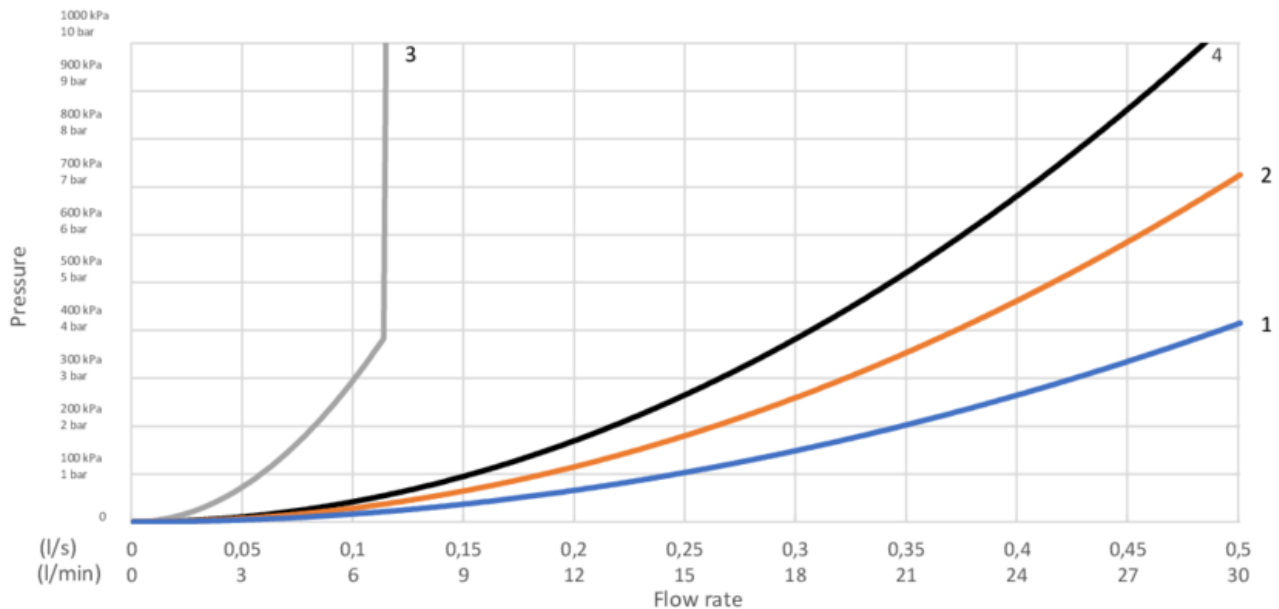

- 1. Max flow (bath- and shower outlet)
- 2. Bathtub outlet: Spouts GB41650247, GB41650320
- 3. Shower set GB41106250
- 4. Spout GB41650279 (85 mm)

| 1. Max flow (bath- and shower outlet) |           | 2. Bathtub outlet: Spouts GB41650247, GB41650320 |           |
|---------------------------------------|-----------|--|-----------|
| - Flow rate at 300 kPa:               | 0,425 l/s | - Flow rate at 300 kPa:                          | 0,322 l/s |
| - Pressure at flow 0,1 l/s:           | 17 kPa    | - Pressure at flow 0,1 l/s:                      | 29 kPa    |
| - Pressure at flow 0,2 l/s:           | 66 kPa    | - Pressure at flow 0,2 l/s:                      | 116 kPa   |
| - Pressure at flow 0,33 l/s:          | 181 kPa   | - Pressure at flow 0,33 l/s:                     | 316 kPa   |

| 3. Shower set GB41106250     |         | 4. Spout GB41650279 (85 mm)  |           |
|------------------------------|---------|------------------------------|-----------|
| - Flow rate at 300 kPa:      | 0,1 l/s | - Flow rate at 300 kPa:      | 0,265 l/s |
| - Pressure at flow 0,1 l/s:  | 300 kPa | - Pressure at flow 0,1 l/s:  | 43 kPa    |
| - Pressure at flow 0,2 l/s:  | N/A     | - Pressure at flow 0,2 l/s:  | 171 kPa   |
| - Pressure at flow 0,33 l/s: | N/A     | - Pressure at flow 0,33 l/s: | 465 kPa   |

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)