



Quality of life since 1825

Pre-rinse set New Nautic - Thermostat

350 mm spout, outlet up/down, 160 c-c

Product features

SMART INSIDE

SAFE TOUCH



- Functional, ergonomic design
- Hand-held rinsing nozzle that minimizes pressure surges
- The nozzle features two different spray patterns

Article numbers

Art-no.
GB41202372

EAN
7391530075907

Packaging information

Length: 880 mm | Width: 245 mm | Height: 135 mm
Weight: 5.96 kg
Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

- Complies with Safe Water installation requirements.



CERTIFIERING
KONTROLL



Denna produkt är anpassad till
Branschregler Säker Vatteninstallation
2021: Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.




Technical information

- Max. tap capacity (at 300 kPa): 0,2 l/s
- Pressure loss with flow (0,33 l/s) 817 kPa
- Standard connection dimension: 160 c-c

GUSTAVSBERG/

FLOW CHART/

New Nautic Pre-rinse Set

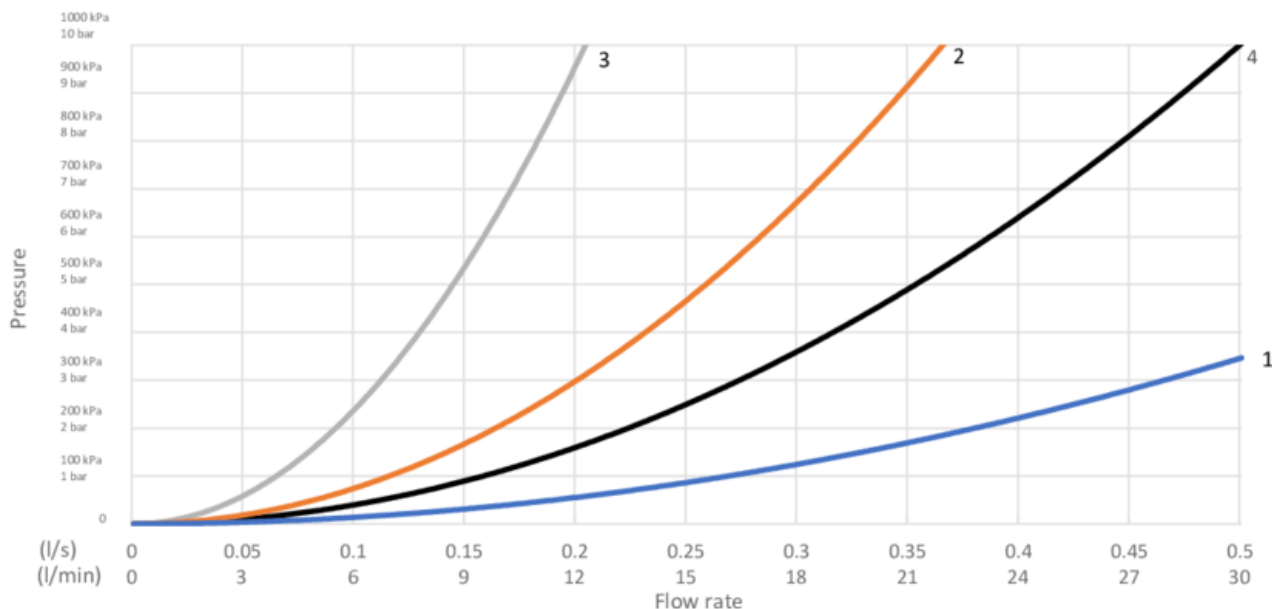

- 1. Max flow (bath- and shower outlet)
- 2. Pre-rinse max flow
- 3. Pre-rinse eco flow
- 4. Spout GB41650288 (350 mm)

1. Max flow (bath- and shower outlet)		2. Pre-rinse max flow	
- Flow rate at 300 kPa:	0,465 l/s	- Flow rate at 300 kPa:	0,2 l/s
- Pressure at flow 0,1 l/s:	14 kPa	- Pressure at flow 0,1 l/s:	75 kPa
- Pressure at flow 0,2 l/s:	56 kPa	- Pressure at flow 0,2 l/s:	300 kPa
- Pressure at flow 0,33 l/s:	151 kPa	- Pressure at flow 0,33 l/s:	817 kPa

3. Pre-rinse eco flow		4. Spout GB41650288 (350 mm)	
- Flow rate at 300 kPa:	0,112 l/s	- Flow rate at 300 kPa:	0,273 l/s
- Pressure at flow 0,1 l/s:	241 kPa	- Pressure at flow 0,1 l/s:	40 kPa
- Pressure at flow 0,2 l/s:	962 kPa	- Pressure at flow 0,2 l/s:	161 kPa
- Pressure at flow 0,33 l/s:	N/A	- Pressure at flow 0,33 l/s:	437 kPa

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com