



Quality of life since 1825

Skalošanas jaucējkrāna komplekts New Nautic – ar termostatu

350 mm snīpis, izvade augšupvērsta/lejupvērsta, 160 c-c



Produkta īpašības

SMART INSIDE

SAFE TOUCH



- Functional, ergonomic design
- Hand-held rinsing nozzle that minimizes pressure surges
- The nozzle features two different spray patterns

Article number

Art.nr.
GB41202372

EAN
7391530075907

Pakuotēs informācija

Garums: 880 mm | Platums: 245 mm | Augstums: 135 mm

Svoris: 5.96 kg

Pakuotēs numeris: 1 pc

Montāža un kopšana

Pirms uzstādīšanas caurules ir jāpievada līdz ūdens jaucējkrānam. Ūdens jaucējkrāns tiek pievienots aukstā ūdens padeves caurulei labajā pusē un karstā ūdens padeves caurulei kreisajā pusē. Ūdens spiediens: maks. 1000 kPa, min. 50 kPa. Karstā ūdens temperatūra: maks. 80 °C, min. 45 °C. Ņemiet vērā, ka mēs neuzņemamies atbildību par bojājumiem, kas radušies nepareizas uzstādīšanas rezultātā.

Enerģijas marķējums un sertifikāti



CERTIFIERING
KONTROLL



Denna produkt är anpassad till
Brandschregler Säker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om brandschreglerna
och monteringsanvisningarna följs.




Techninė informacija

- Max. tap capacity (at 300 kPa): 0,2 l/s
- Pressure loss with flow (0,33 l/s) 817 kPa
- Standarta savienojuma dimensija: 160 c-c

GUSTAVSBERG/

FLOW CHART/

New Nautic Pre-rinse Set

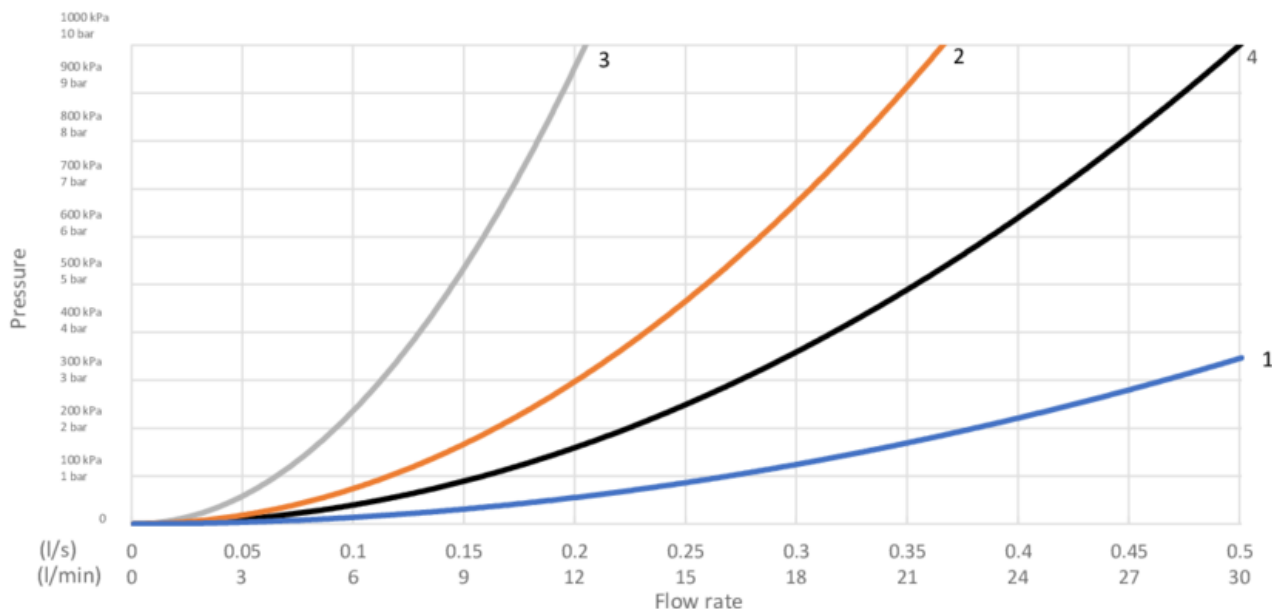

- 1. Max flow (bath- and shower outlet)
- 2. Pre-rinse max flow
- 3. Pre-rinse eco flow
- 4. Spout GB41650288 (350 mm)

1. Max flow (bath- and shower outlet)		2. Pre-rinse max flow	
- Flow rate at 300 kPa:	0,465 l/s	- Flow rate at 300 kPa:	0,2 l/s
- Pressure at flow 0,1 l/s:	14 kPa	- Pressure at flow 0,1 l/s:	75 kPa
- Pressure at flow 0,2 l/s:	56 kPa	- Pressure at flow 0,2 l/s:	300 kPa
- Pressure at flow 0,33 l/s:	151 kPa	- Pressure at flow 0,33 l/s:	817 kPa

3. Pre-rinse eco flow		4. Spout GB41650288 (350 mm)	
- Flow rate at 300 kPa:	0,112 l/s	- Flow rate at 300 kPa:	0,273 l/s
- Pressure at flow 0,1 l/s:	241 kPa	- Pressure at flow 0,1 l/s:	40 kPa
- Pressure at flow 0,2 l/s:	962 kPa	- Pressure at flow 0,2 l/s:	161 kPa
- Pressure at flow 0,33 l/s:	N/A	- Pressure at flow 0,33 l/s:	437 kPa

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com