



Pre-rinse set New Nautic -**Thermostat**

350 mm spout, 150 c-c.

Product features

SMART INSIDE

SAFE TOUCH







- Functional, ergonomic design
- · Hand-held rinsing nozzle that minimizes pressure surges
- The nozzle features two different spray patterns

Article numbers

Art-no. GB41212372 EAN 7391530075914

Packaging information

Length: 880 mm | Width: 245 mm | Height: 135 mm

Weight: 6 kg Weight: 1pc

Assembling & Care

Mounted according to the instructions. Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications

 The product is adapted to fulfil Safe Water Installation industry guidelines















Technical information


- Max. tap capacity (at 300 kPa): 0,2 l/s
- Pressure loss with flow (0,33 l/s) 817 kPa
- Standard connection dimension: 150 c-c

GUSTAVSBERG/

FLOW CHART/

New Nautic Pre-rinse Set



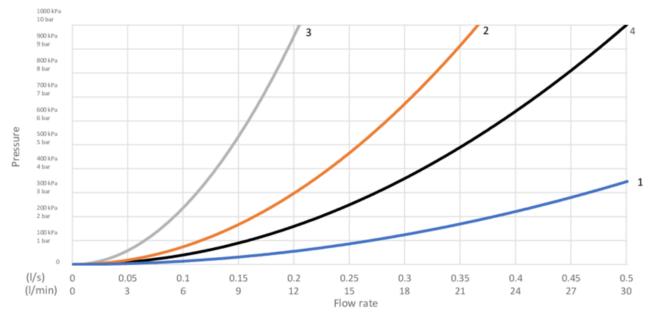

- 1. Max flow (bath- and shower outlet)
 - 2. Pre-rinse max flow
 - 3. Pre-rinse eco flow

2. Pre-rinse max flow

1. Max flow (bath- and shower outlet)			2. Pre-rinse max flow		
- Flow rate at 300 kPa:	0,465 l/s		- Flow rate at 300 kPa:	0,2 l/s	
- Pressure at flow 0,1 l/s:	14 kPa		- Pressure at flow 0,1 l/s:	75 kPa	
- Pressure at flow 0,2 l/s:	56 kPa		- Pressure at flow 0,2 l/s:	300 kPa	
- Pressure at flow 0,33 l/s:	151 kPa		- Pressure at flow 0,33 l/s:	817 kPa	

3. Pre-rinse eco flow

- Flow rate at 300 kPa:	0,112 l/s
- Pressure at flow 0,1 l/s:	241 kPa
- Pressure at flow 0,2 l/s:	962 kPa
- Pressure at flow 0,1 l/s: - Pressure at flow 0,2 l/s: - Pressure at flow 0,33 l/s:	N/A

4. Spout GB41650288 (350 mm)

4. Spout GB41650288 (350 mm)

4. Spout OB41030200 (330 IIIIII)	
- Flow rate at 300 kPa:	0,273 l/s
- Pressure at flow 0,1 l/s:	40 kPa
- Pressure at flow 0,2 l/s:	161 kPa
- Pressure at flow 0.33 l/s:	437 kPa

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com