



Quality of life since 1825

# Vonios maišytuvas „New Nautic“ su termostatu

Fiksuotas vonios snapas, išvadas į apačią, 160 c-c

## Produkto savybės

SMART INSIDE SAUGUS LIESTI (SAFE TOUCH) TOLYGI TEMPERATŪRA



- Safe Touch reduces the heat on the front of the mixer
- Maintains even water temperature during pressure and temperature changes
- Complete with 85 mm bathtub spout

## Prekės numeris

Art.nr.  
GB41202352

EAN  
7391530081212

## Surinkimas ir priežiūra

Prieš įrengiant būtina praplauti linijas iki pat čiaupo. Maišytuvas yra sujungtas su šalto vandens linija dešinėje ir karšto vandens linija kairėje. Vandens slėgis: maks. – 1000 kPa, min. – 50 kPa. Karšto vandens temperatūra: maks. – 80 °C, min. – 45 °C. Atminkite, kad mes neatsakome už žalą, padarytą dėl netinkamo įrengimo.

## Energijos klasės etiketė ir sertifikatai



CERTIFIERING  
KONTROLL

RI  
SE




Denna produkt är anpassad till  
Branschregler Saker Vatteninstallation  
2021:1. Leverantören garanterar  
produktens funktion om branschreglerna  
och monteringsanvisningarna följs.



## Tehniskā informācija

- Max. tap capacity (at 300 kPa): 0,265 l/s
- Pressure loss with flow (0,33 l/s) 465 kPa
- Standartinės jungties matmuo: 160 c-c

## Rezerves daļas

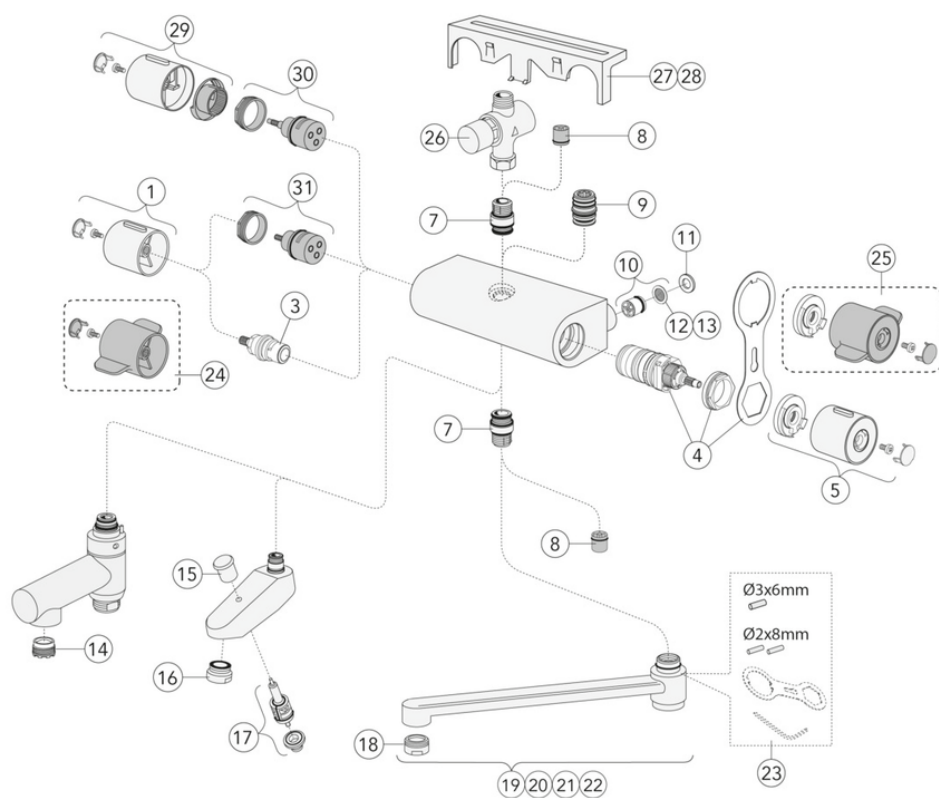


ExplodedView New Nautic\_thermomixer\_mixers (Rev 1. 2023-02-07)

| Nr. | Produkto                                   | Art.nr.       |
|-----|--------------------------------------------|---------------|
| 1   | Rankenėlė „New Nautic“ – srautas           | GB4165021701  |
| 3   | Vožtuvo galvutė „New Nautic“               | GB41650292001 |
| 4   |                                            | GB41638334 01 |
| 5   | Rankenėlė „New Nautic“ – temperatūra       | GB4165021901  |
| 7   | Užmova „New Nautic“                        | GB4165020401  |
| 8   |                                            | GB41634719 01 |
| 9   | Užmova „New Nautic“                        | GB4165020601  |
| 10  |                                            | GB41632698 02 |
| 11  | Tarpiklis „New Nautic“                     | GB41650355    |
| 12  |                                            | GB41635633 02 |
| 13  |                                            | GB41635633 10 |
| 14  |                                            | GB41638542 01 |
| 15  |                                            | GB41636822 01 |
| 16  |                                            | GB41634555 01 |
| 17  |                                            | GB41636577 01 |
| 18  |                                            | GB41630131 01 |
| 19  | Pasukamas snapas 85 mm                     | GB41650279    |
| 20  | Pasukamas snapas 150 mm                    | GB41650282    |
| 21  | Pasukamas snapas 250 mm                    | GB41650285    |
| 22  | Pasukamas snapas 350 mm                    | GB41650288    |
| 23  |                                            | GB41633972    |
| 24  | Rankenėlė „New Nautic Care“ – srautas      | GB4165022101  |
| 25  | Rankenėlė „New Nautic Care“ – temperatūra  | GB4165022301  |
| 26  | Slėgio vožtuvo su laiko nustatymo funkcija | GB41639716    |
| 27  | Lentyna                                    | GB41650052    |
| 28  | Lentyna                                    | GB4165005253  |
| 29  | Rankenėlė „New Nautic“ – kiekis            | GB4165036301  |
| 30  | Perjungiklis „New Nautic“                  | GB4165035201  |
| 31  | Perjungiklis „New Nautic“                  | GB4165021301  |
| 32  | Aeratorius                                 | GB4165021001  |
| 33  |                                            | GB41634756 01 |
| 35  |                                            | GB41634577    |
| 36  |                                            | GB41638998 02 |
| 37  | Sukomplektuota sujungimo užmova            | GB41632815    |

# GUSTAVSBERG/

## FLOW CHART/ Thermostatic Mixers

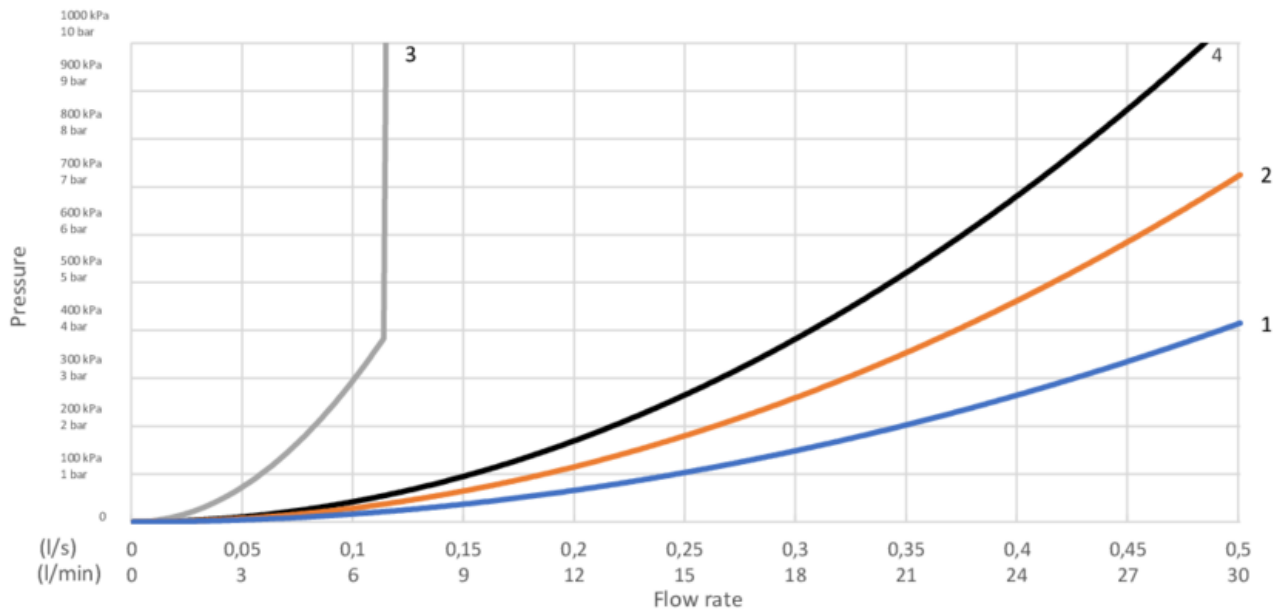

- 1. Max flow (bath- and shower outlet)
- 2. Bathtub outlet: Spouts GB41650247, GB41650320
- 3. Shower set GB41106250
- 4. Spout GB41650279 (85 mm)

| 1. Max flow (bath- and shower outlet) |           | 2. Bathtub outlet: Spouts GB41650247, GB41650320 |           |
|---------------------------------------|-----------|--------------------------------------------------|-----------|
| - Flow rate at 300 kPa:               | 0,425 l/s | - Flow rate at 300 kPa:                          | 0,322 l/s |
| - Pressure at flow 0,1 l/s:           | 17 kPa    | - Pressure at flow 0,1 l/s:                      | 29 kPa    |
| - Pressure at flow 0,2 l/s:           | 66 kPa    | - Pressure at flow 0,2 l/s:                      | 116 kPa   |
| - Pressure at flow 0,33 l/s:          | 181 kPa   | - Pressure at flow 0,33 l/s:                     | 316 kPa   |

| 3. Shower set GB41106250     |         | 4. Spout GB41650279 (85 mm)  |           |
|------------------------------|---------|------------------------------|-----------|
| - Flow rate at 300 kPa:      | 0,1 l/s | - Flow rate at 300 kPa:      | 0,265 l/s |
| - Pressure at flow 0,1 l/s:  | 300 kPa | - Pressure at flow 0,1 l/s:  | 43 kPa    |
| - Pressure at flow 0,2 l/s:  | N/A     | - Pressure at flow 0,2 l/s:  | 171 kPa   |
| - Pressure at flow 0,33 l/s: | N/A     | - Pressure at flow 0,33 l/s: | 465 kPa   |

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)