



Quality of life since 1825

Pesurenni segisti New Nautic

Pliivaba, vaakumklapp, 150 c-c

Toote Omadused

PLIIVABA



- Pliisisaldus väiksem kui 0,1%
- Vaakumklapi- ja tagasilöögiklappidega pealevoolu ühendustes
- Tagasivoolukaitse vastavalt standardile SS-EN 1717 [HD]

Article number

Art.nr.
GB412122740

EAN
7391530081717

Pakendiinfo

Pikkus: 210 mm | Laius: 145 mm | Kõrgus: 92 mm

Kaal: 2.03 kg

Number pakendis: 1 pc

Paigaldus ja hooldus

Enne paigaldamist tuleb torude loputamiseks lasta veel joosta. Segisti on ühendatud paremalt külmaveetoruga ja vasakult kuumaveetoruga. Veearve: max 1000 kPa, min 50 kPa. Kuuma vee temperatuur: max 80 °C, min 45 °C. Me ei vastuta valest paigaldusest tuleneva kahju eest.

Energiamärgistus ja vastavustunnistused



CERTIFIERING
KONTROLL


RI
SE



Tehniline info

- Max. tap capacity (at 300 kPa): 0,37 l/s
- Pressure loss with flow (0,1 l/s) 22 kPa
- Ühenduse mõõdud: 150 c-c



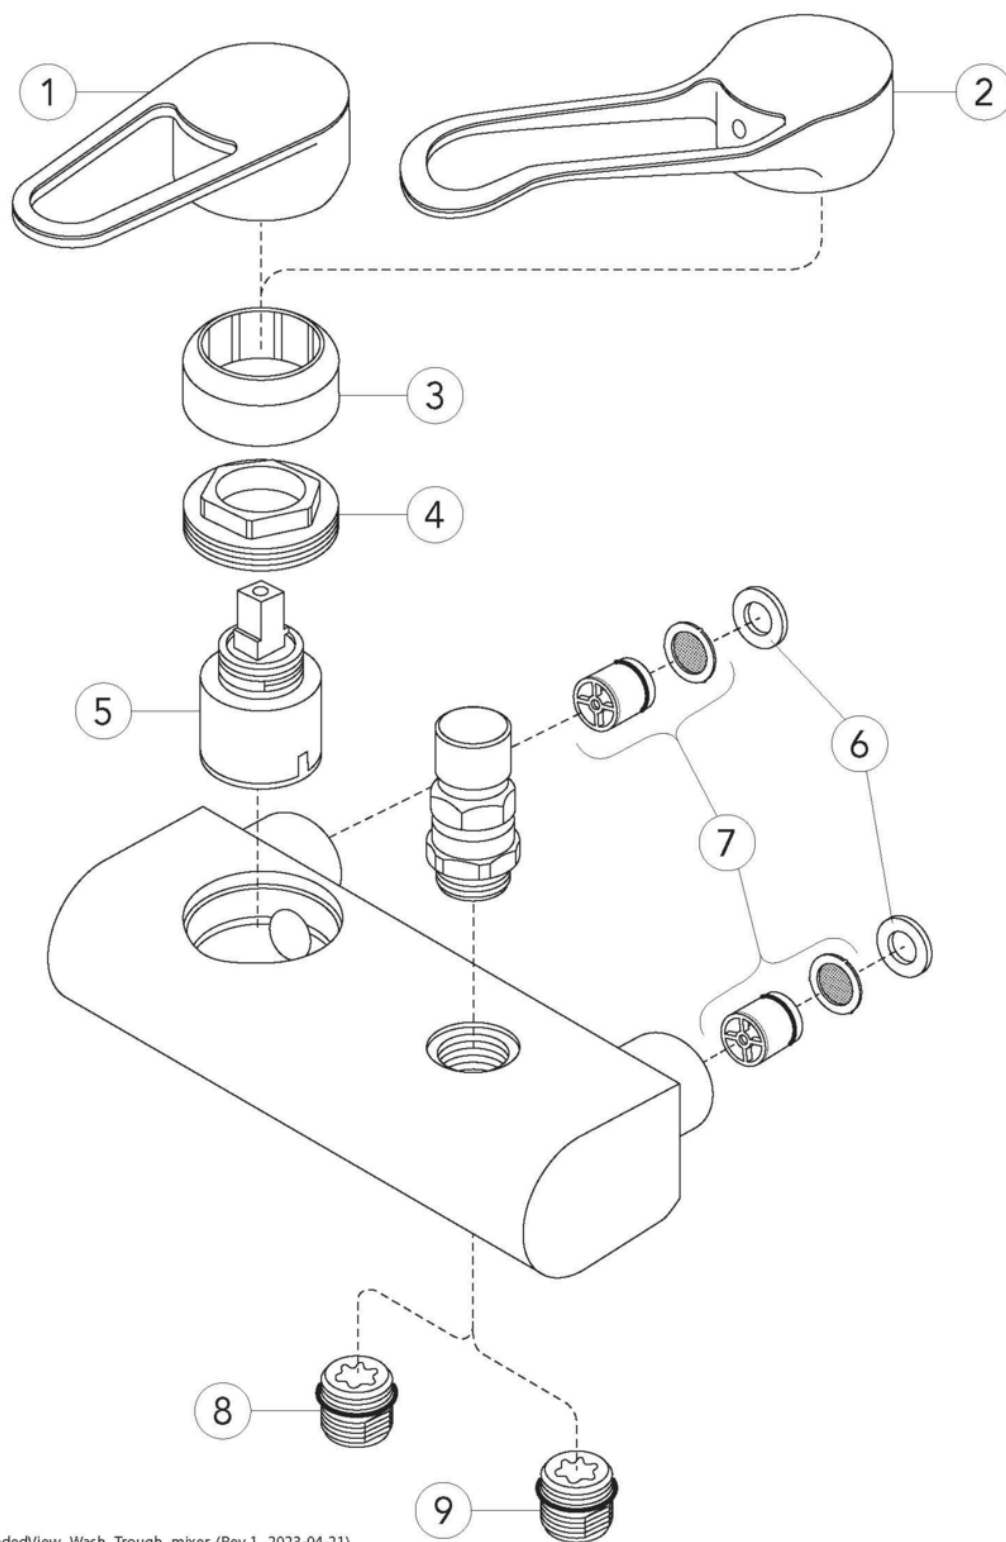


ExplodedView_Wash_Trough_mixer (Rev 1. 2023-04-21)

Nr.	Toote	Art.nr.
1	Segisti kahv, New Nautic 2021-->	GB41639803 01
2	Kahv Nautic, Care	GB41639801 01
3		GB41639523 01
4		GB41639522 01
5	Keraamiline tööorgan	GB41637393
6		GB41635641
7		GB41632698 02
8		GB41634757 01
9		GB41638955 01

GUSTAVSBERG/

FLOW CHART/

Ettgrepp väggblandare Nya Nautic

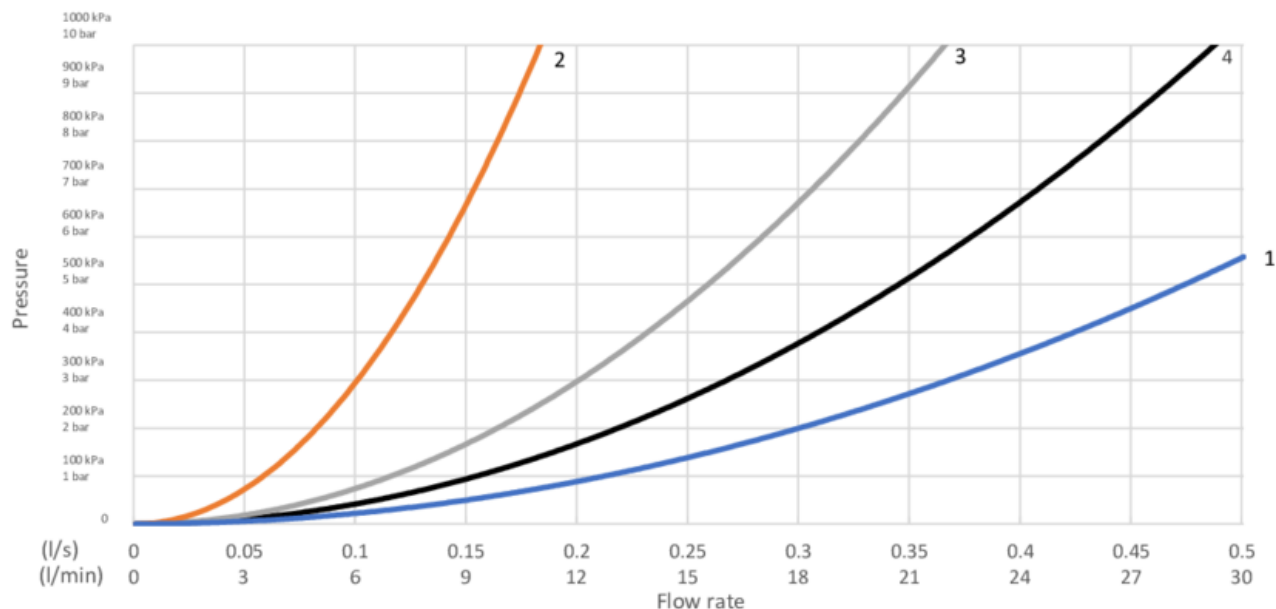

- 1. Max flow
- 2. GB41212087, GB41202087, (with shower set GB41106250)
- 3. A-restrictor
- 4. B-restrictor

1. Max flow		2. GB41212087, GB41202087, (with shower set GB41106250)	
- Flow rate at 300 kPa:	0,367 l/s	- Flow rate at 300 kPa:	0,1 l/s
- Pressure at flow 0,1 l/s:	22 kPa	- Pressure at flow 0,1 l/s:	300 kPa
- Pressure at flow 0,2 l/s:	89 kPa	- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	243 kPa	- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2023-05-22 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com