



Quality of life since 1825

# Pre rinse set New Nautic – thermostat

ECO Flow max 6 l/m, 350 mm spout, 160 c-c.

## Product features

SMART INSIDE    SAFE TOUCH



- ECO Flow that meet market requirements
- Hand-held rinsing nozzle that minimizes pressure surges
- The nozzle features two different spray patterns

## Article numbers

Art-no.  
GB41202372B

EAN  
7391530082004

## Packaging information

Length: 880 mm | Width: 245 mm | Height: 135 mm

Weight: 5.96 kg

Weight: 1 pc



## Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

## Energy labeling and certifications

- Complies with Safe Water installation requirements.



CERTIFYING  
KONTROLL




## Technical information

- Max. tap capacity (at 300 kPa): 0,1 l/s
- Standard connection dimension: 160 c-c

# GUSTAVSBERG/

## FLOW CHART/ Leed & Breeam

GUSTAVSBERG /  
SMARTER BATHROOMS

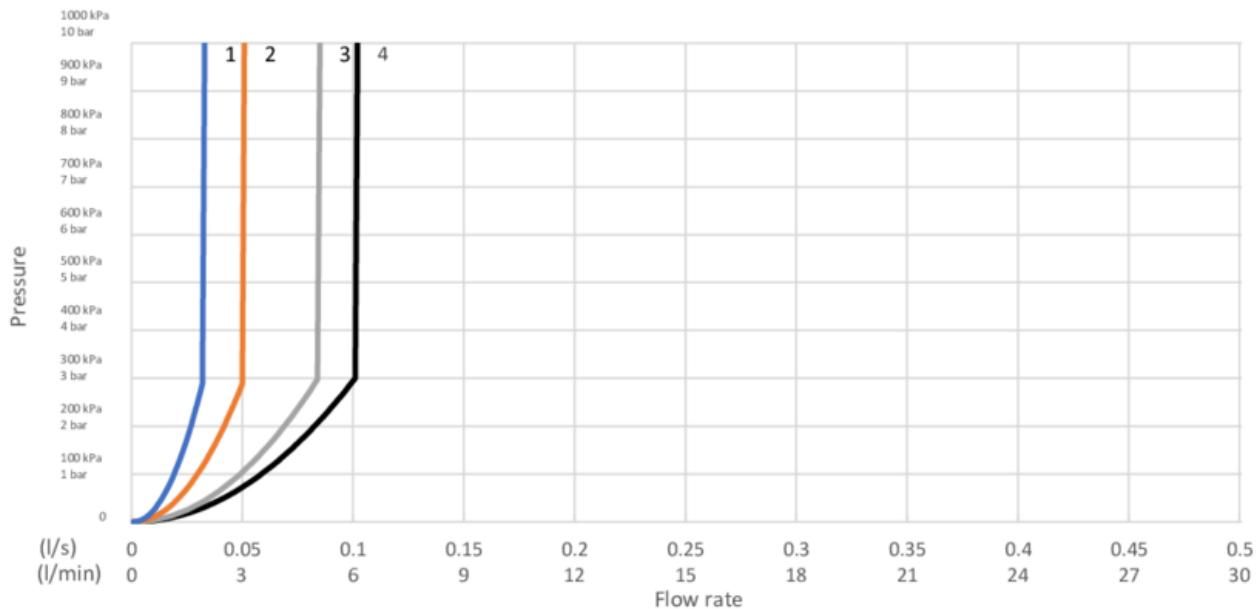

<span style="background-color: blue; display: inline-block; width: 15px; height: 15px;"></span>	1. GB412160470LB /GB41216047064LB	<span style="background-color: black; display: inline-block; width: 15px; height: 15px;"></span>	4. GB41202372B
<span style="background-color: orange; display: inline-block; width: 15px; height: 15px;"></span>	2. GB41216047B /GB412160470B /GB412160450B /GB41216147064B /GB412161470B /GB412162510B		
<span style="background-color: grey; display: inline-block; width: 15px; height: 15px;"></span>	3. GB41206096B /GB412060560B /GB412060960B		

### 1. GB412160470LB /GB41216047064LB

<span style="background-color: blue; display: inline-block; width: 15px; height: 15px;"></span>	- Flowrate at 300 kPa: 0,032 l/s
<span style="background-color: blue; display: inline-block; width: 15px; height: 15px;"></span>	- Pressure at flow 0,1 l/s: N/A
<span style="background-color: blue; display: inline-block; width: 15px; height: 15px;"></span>	- Pressure at flow 0,2 l/s: N/A
<span style="background-color: blue; display: inline-block; width: 15px; height: 15px;"></span>	- Pressure at flow 0,33 l/s: N/A

Rev, 1, 2023-08-18 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)