



Quality of life since 1825

Pesuallassekoitin Atlantic – yksiote

Tyhjiöventtiili, 150 c-c

Tuotteen ominaisuudet

- Helppo-otteinen vipu, jossa selkeä kylmän ja kuuman veden merkintä
- Sisältää tyhjiöventtiilin ja sulkuventtiilit tuloaukoissa Eco-stop, säädettävä enimmäisvirtaaman rajoitus

Artikkelien numero

Art.nr.
GB41211374

EAN
7391530085074

Pakkaustiedot

Pituus: 210 mm | Leveys: 145 mm | Korkeus: 92 mm

Paino: 2.03 kg

Pakkauksen numero: 1 pc

Kokoaminen & hoito

Energiamerkintä ja -sertifiointi



CERTIFIERING
KONTROLL





Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Tekniset tiedot


- Max. tap capacity (at 300 kPa): 0,37 l/s
- Pressure loss with flow (0,1 l/s) 22 kPa
- Liitäntäkoko: 150 c-c

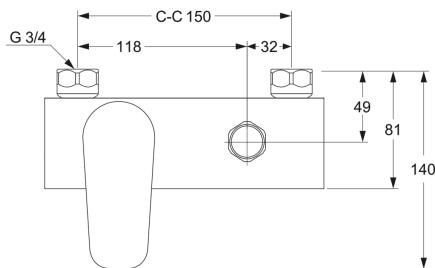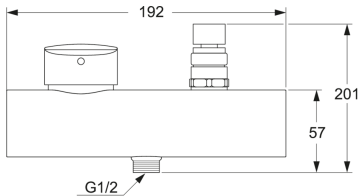

GUSTAVSBERG/

FLOW CHART/

Ettgrepp väggblandare Nya Nautic

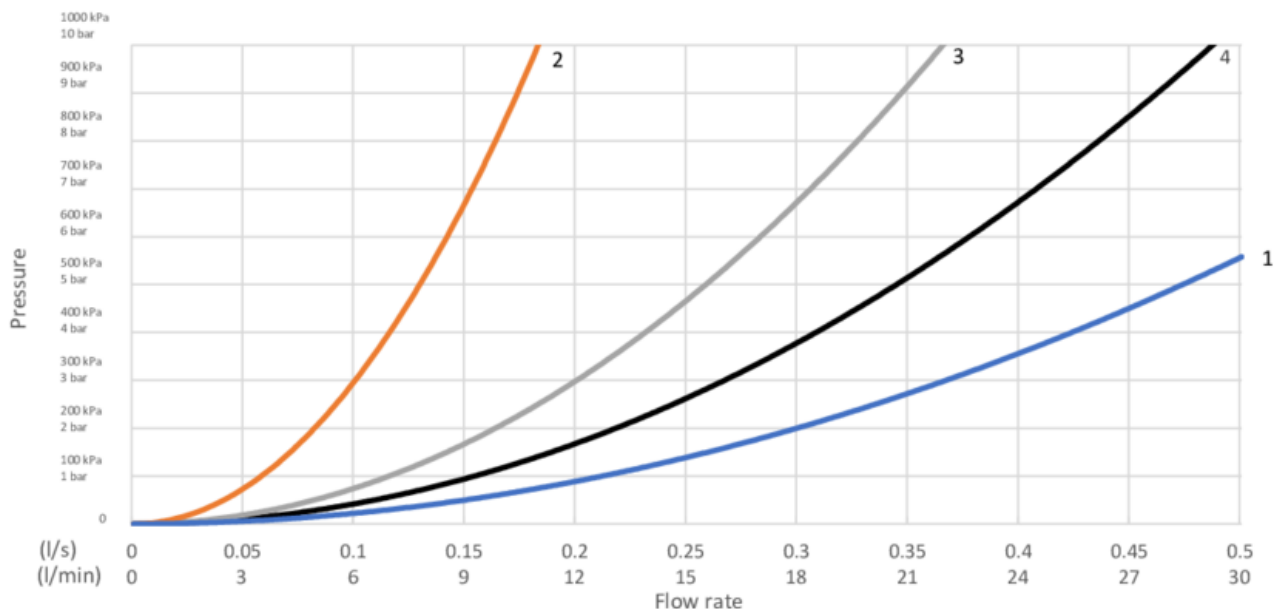

- 1. Max flow
- 2. GB41212087, GB41202087, (with shower set GB41106250)
- 3. A-restrictor
- 4. B-restrictor

1. Max flow		2. GB41212087, GB41202087, (with shower set GB41106250)	
- Flow rate at 300 kPa:	0,367 l/s	- Flow rate at 300 kPa:	0,1 l/s
- Pressure at flow 0,1 l/s:	22 kPa	- Pressure at flow 0,1 l/s:	300 kPa
- Pressure at flow 0,2 l/s:	89 kPa	- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	243 kPa	- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2023-05-22 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com