



Quality of life since 1825

Kitchen mixer New Nautic Care - high Spout

Lead free, energy class A, elongated lever

Product features



- Contains less than 0.1% lead
- Energy Class A
- Equipped with elongated lever

Article numbers

Art-no.	EAN
GB41206056064L	7391530085364

Packaging information

Length: 440 mm | Width: 275 mm | Height: 75 mm
Weight: 1.7 kg
Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




Technical information

- Max. tap capacity (at 300 kPa): 0,1l/s
- Pressure loss with flow (0,1l/s) 300 kPa
- CO2 Footprint: 8.43 kg
- Standard connection dimension: 10mm

GUSTAVSBERG/

FLOW CHART/

Kök 6 l/min

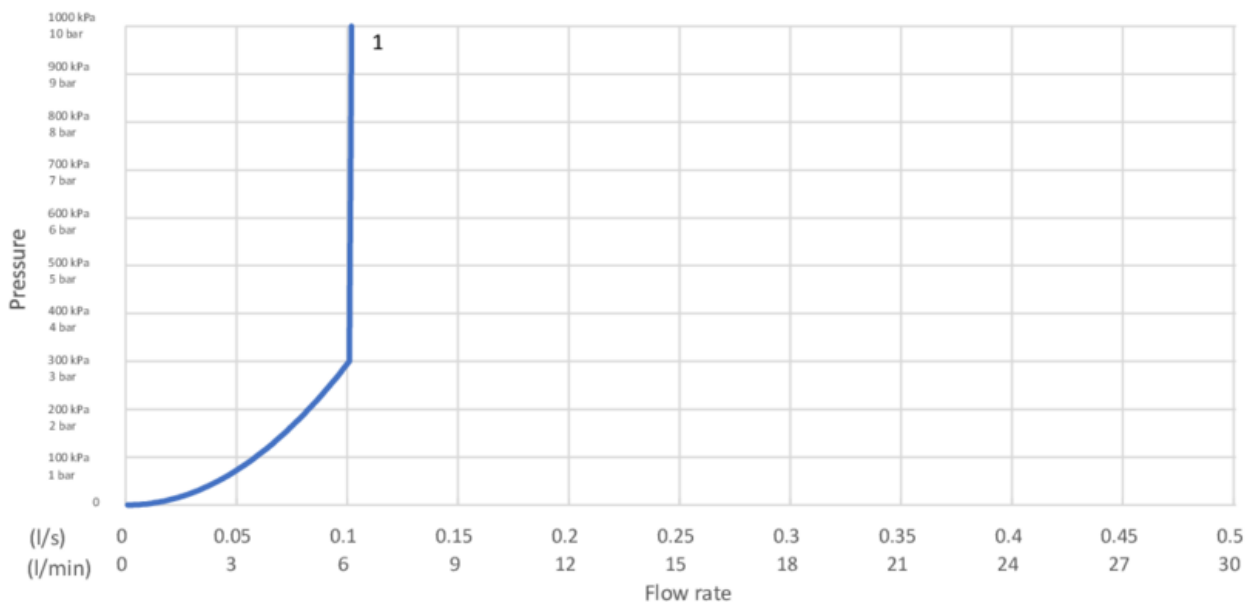

- GB412060550L
- GB41206055064L
- GB412060560L
- GB41206056064L
- GB41206056RL
- GB412060950L
- GB41206095064L
- GB412060960L
- GB41206096064L
- GB412060966L

- Flowrate at 300 kPa:	0,1 l/s
- Pressure at flow 0,1 l/s:	300 kPa
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2023-10-25 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com