



Quality of life since 1825

Washb mixer New Nautic 150mm spout

Lead-free, elongated lever, laminar.

Product features

SMART INSIDE



ECO-STOP



QUICK FIT



LEAD-FREE



- Contains less than 0.1% lead
- Laminar flow
- Equipped with elongated lever

Article numbers

Art-no.
GB41216055064L

EAN
7391530086408

Packaging information

Length: 295 mm | Width: 290 mm | Height: 75 mm


Weight: 1.5 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications



Technical information

- Pressure, Flow & Temp: Maxflöde 300kPa: 0,1l/s
- Standard connection dimension: 10mm



Spare parts




No.	Product	Art-no.
1	Lever, New Nautic 2021-->	GB41639803 01
2	Cover	GB41639523 01
3	Nut - ceramic package	GB41639522 01
4	Ceramic package	GB41637393
5	Ceramic Cartridge	GB41639567 01
6	Aerator	GB41630131 01
7	Aerator	GB41639565 01
8	Aerator	GB41639171 01
9	SoftPex hose	GB41639279 02
10	SoftPex hose	GB41638721 02
11	SoftPex hose	GB41638708 02
12	Mounting kit New Nautic	GB41639936 01
13	Softpex hose 300 mm	GB41638720 01
14	Shower hose, Biflex	GB41636263 00
15	Hand shower	GB41633860 33
16	Hand shower fixing	GB41637575
18	Pushdown valve	GB41636575 01
19	Plug valve	GB41637445
20	Single lever Care	GB41639801 01

GUSTAVSBERG/

FLOW CHART/

Tvättställsblandare Nya Nautic - 150 mm pip

GUSTAVSBERG /
SMARTER BATHROOMS

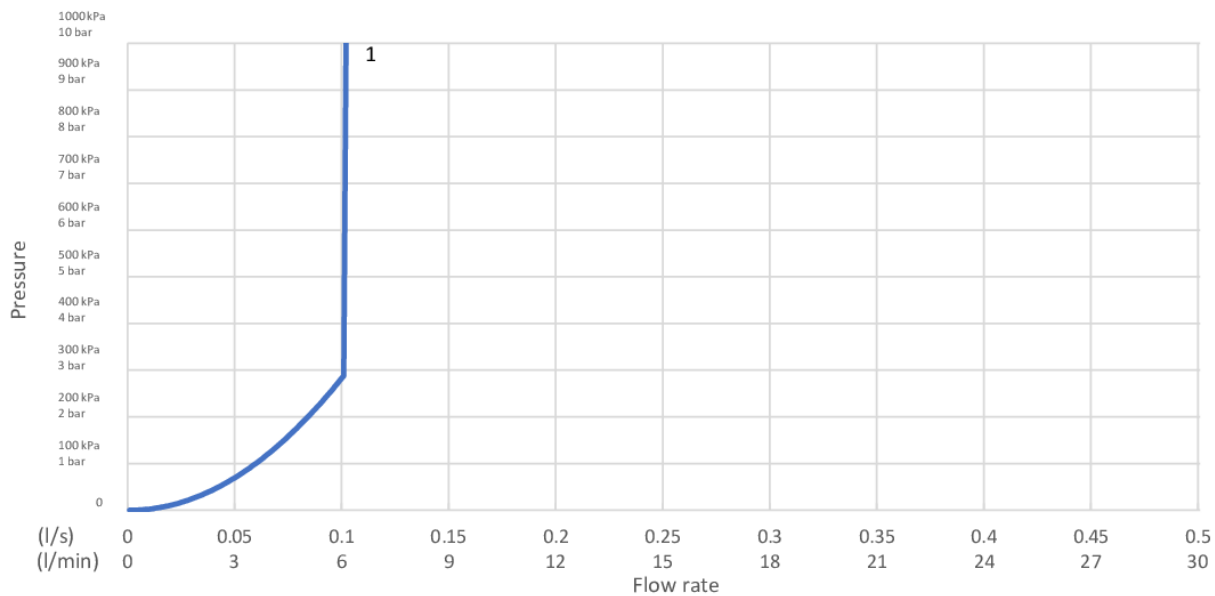

1. GB41216055064L

1. GB41216055064L

- Flowrate at 300 kPa:	0,1 l/s
- Pressure at flow 0,1 l/s:	288 kPa
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A