



Quality of life since 1825

Washbasin mixer Ducentic

Polished brass

Product features

LEAD-FREE



- Created for the 200 year anniversary of Gustavsberg, celebrating the heritage of craftsmanship and design
- Swiveling spout, can be locked at 0, 60 or 110 degrees
- Contains less than 0.1% lead

Article numbers

Art-no.
GB4121705119

EAN
7391530087771

Packaging information

Length: 180 mm | Width: 345 mm | Height: 100 mm

Weight: 1.34 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




CERTIFYING
KONTROLL

RI
SE




Technical information

- Max. tap capacity (at 300 kPa): 0,095 l/s

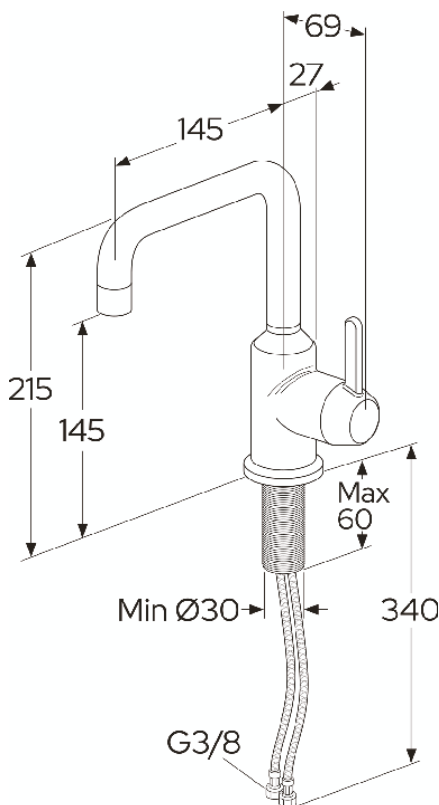

Spare parts

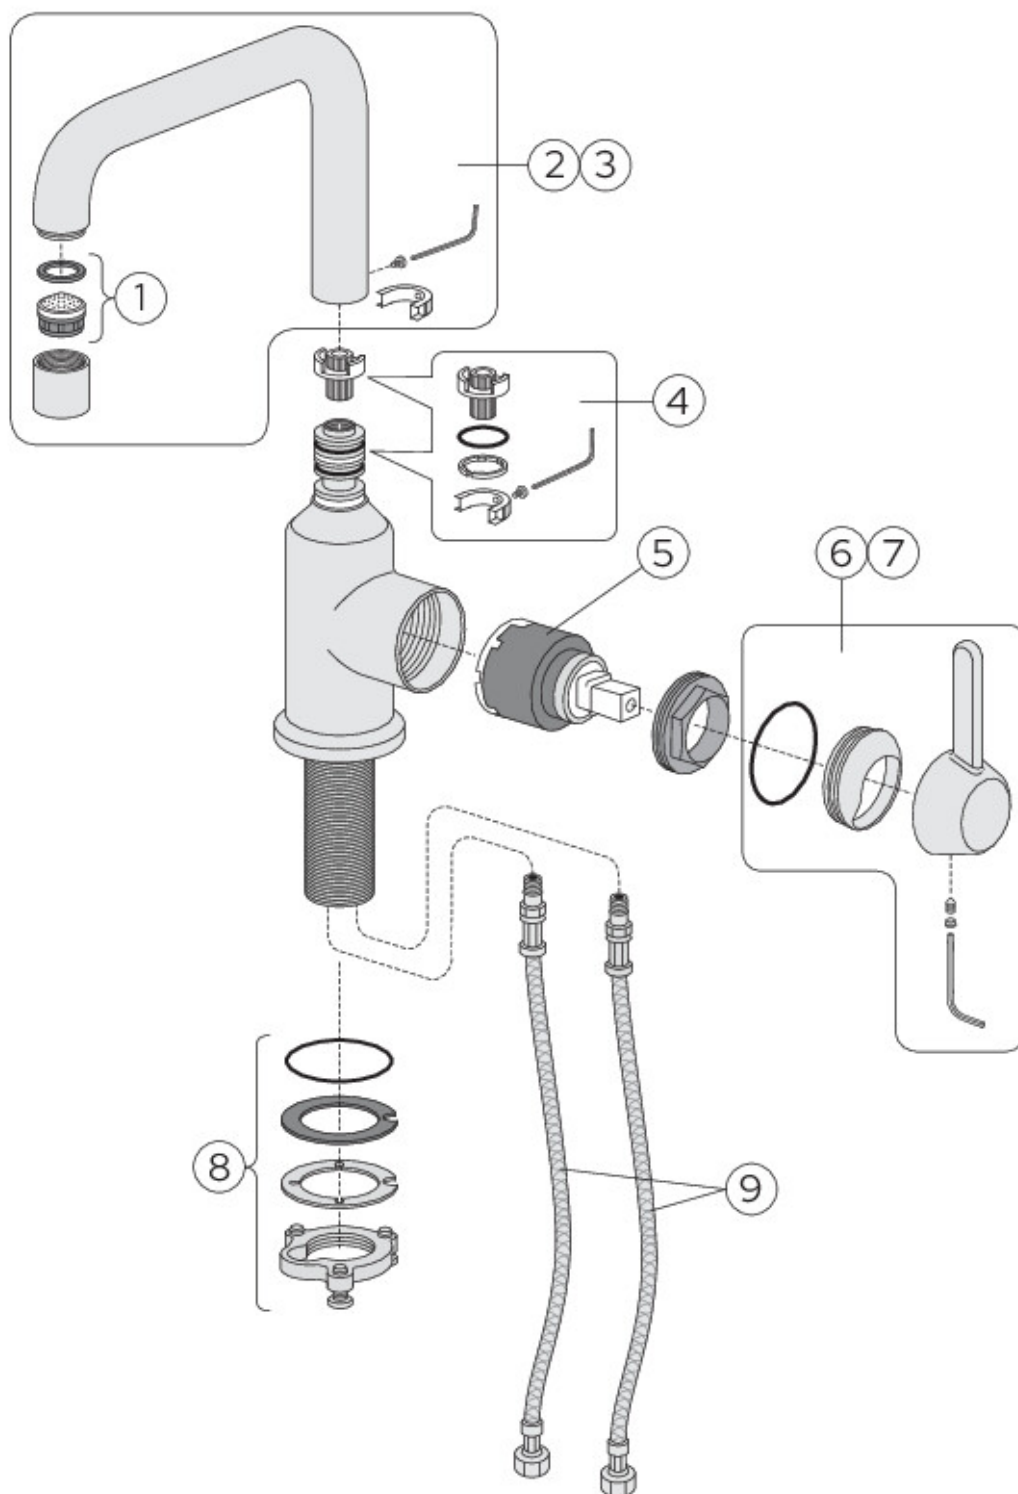


ExplodedView Ducentic_kitchen_1-hole
(Rev I. 2024-11-05)

No.	Product	Art-no.
1	Aerator	GB41650657
2	Spout Ducentic	GB41650656
3	Spout Ducentic	GB4165065619
4	Assembly kit	GB41650658
5	Cartridge Estetic kitchen	GB41650567
6	Lever Ducentic	GB41650655
7	Lever Ducentic	GB4165065519
8	Mounting kit	GB41650665
9	SPX hose	GB41636726 02

GUSTAVSBERG/

FLOW CHART/

Ducentic washbasin mixer

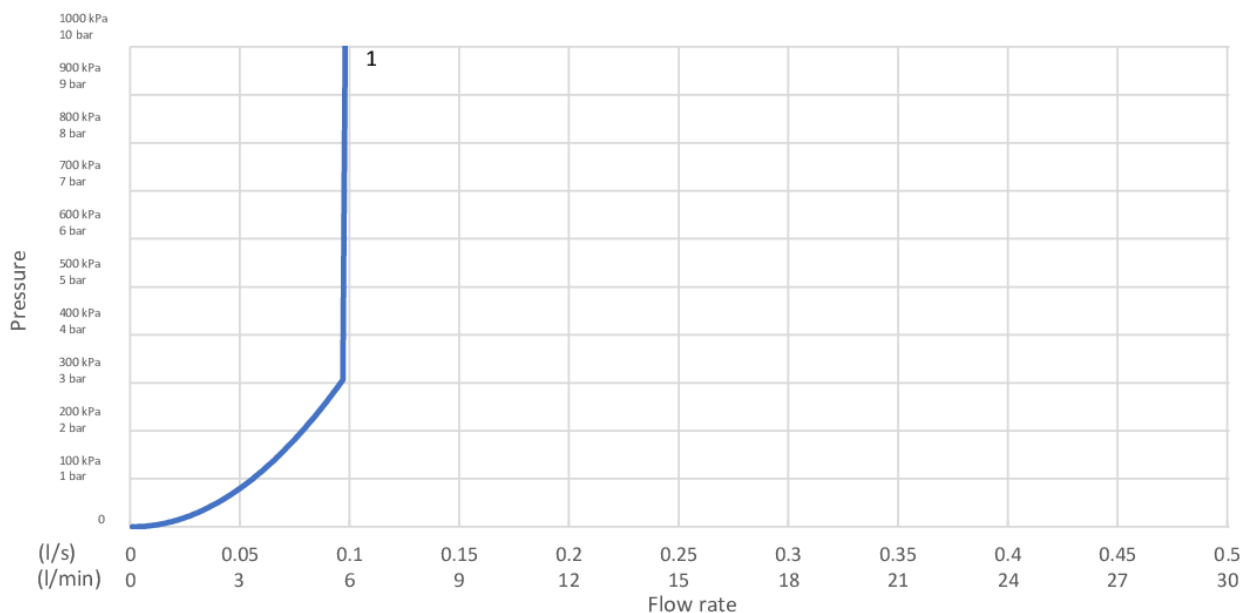

1. Max flow

1. Max flow

- Flowrate at 300 kPa:	0,095 l/s
- Pressure at flow 0,1 l/s:	N/A
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2025-03-13 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com