



Quality of life since 1825

Washbasin mixer Ducentic

Polished brass, double hole

Product features

LEAD-FREE



- Created for the 200 year anniversary of Gustavsberg, celebrating the heritage of craftsmanship and design
- Swiveling spout, can be locked at 0, 60 or 110 degrees
- Contains less than 0.1% lead

Article numbers

Art-no.
GB4121725119

EAN
7391530087795

Packaging information

Length: 220 mm | Width: 375 mm | Height: 75 mm

Weight: 1.43 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




RI
SE




Technical information

- Max. tap capacity (at 300 kPa): 0,095 l/s

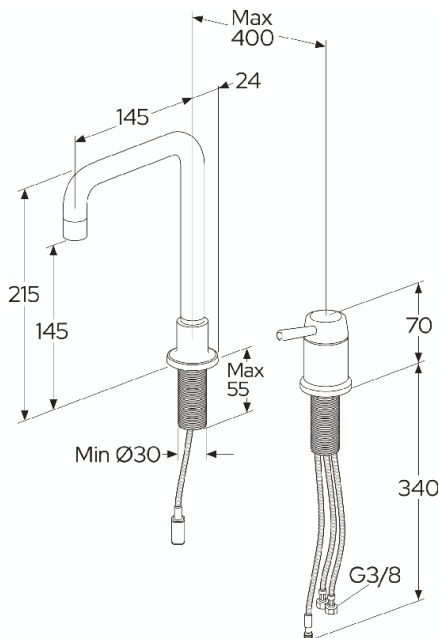

Spare parts

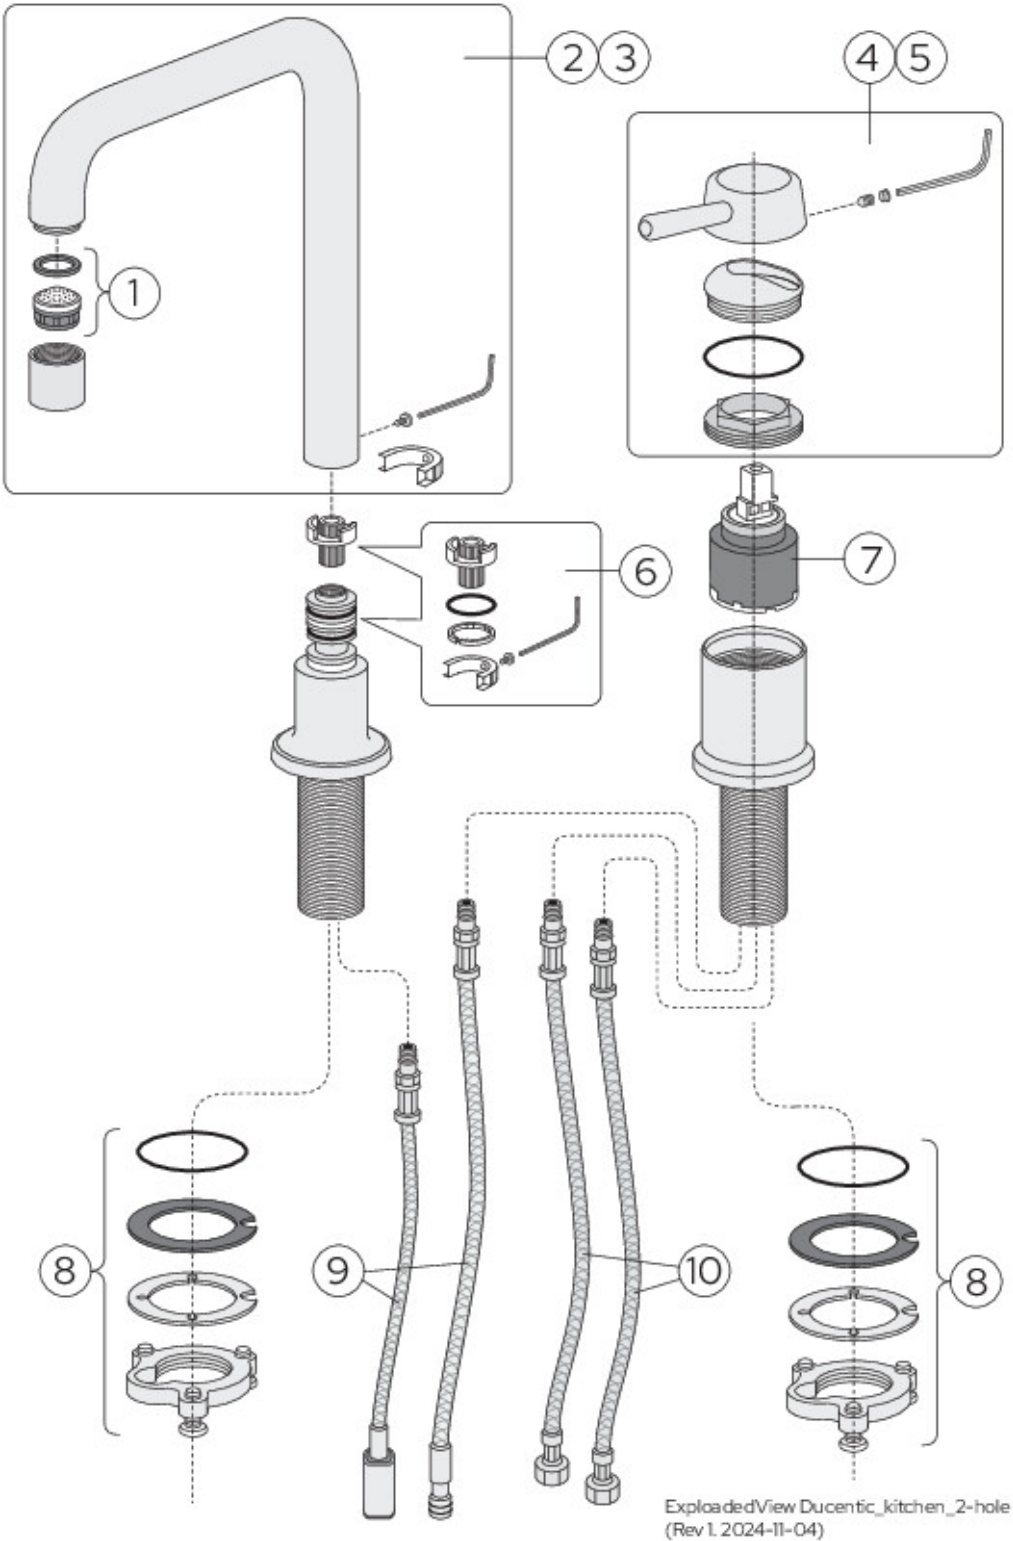


ExplodedView Ducentic_kitchen_2-hole
(Rev I. 2024-11-04)

No.	Product	Art-no.
-----	---------	---------

GUSTAVSBERG/

FLOW CHART/

Ducentic washbasin mixer

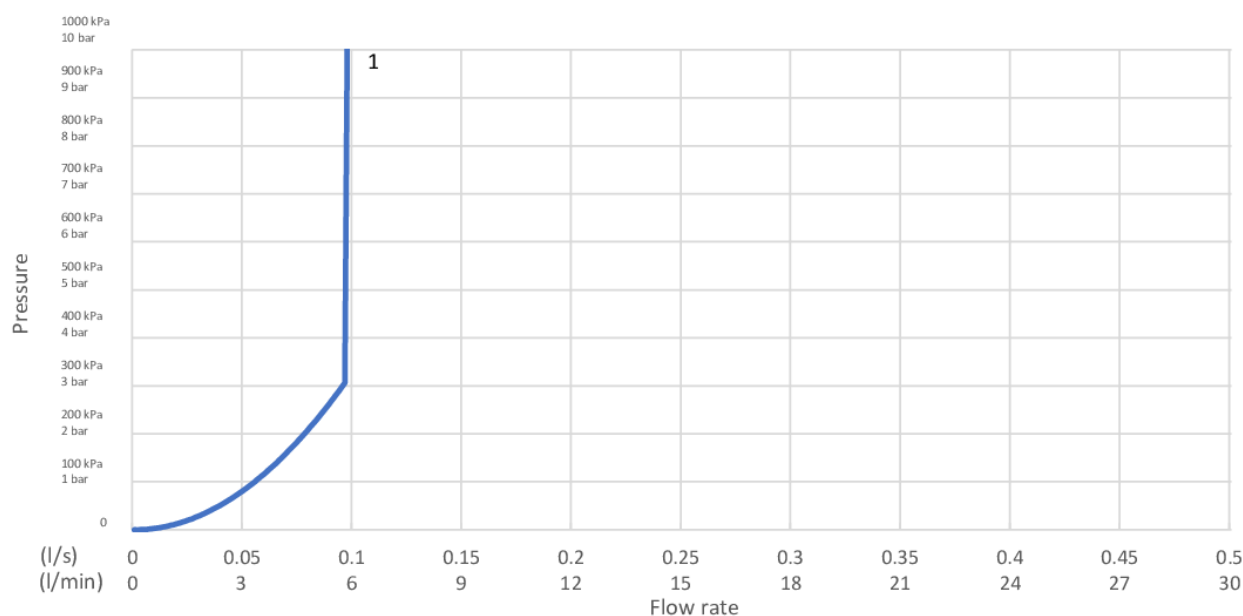

1. Max flow

1. Max flow

- Flowrate at 300 kPa:	0,095 l/s
- Pressure at flow 0,1 l/s:	N/A
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2025-03-13 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com