



Quality of life since 1825

Shower column New Nautic Round

160 c-c.

Product features

SAFE TOUCH



- Super slim head shower with generous water flow
- 3-functional hand shower with a pushbutton
- Mixer with pure, unbroken lines and soft contours

Article numbers

Art-no.
GB41202330

EAN
7391530075808

Packaging information

Length: 745 mm | Width: 368 mm | Height: 94 mm

Weight: 4.64 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications



CERTIFIERING
KONTROLL





Denna produkt är anpassad till
Branschregler Säker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Technical information

- Max. tap capacity (at 300 kPa): 0,465 l/s
- Pressure loss with flow (0,2 l/s) 56 kPa
- Standard connection dimension: 160 c-c



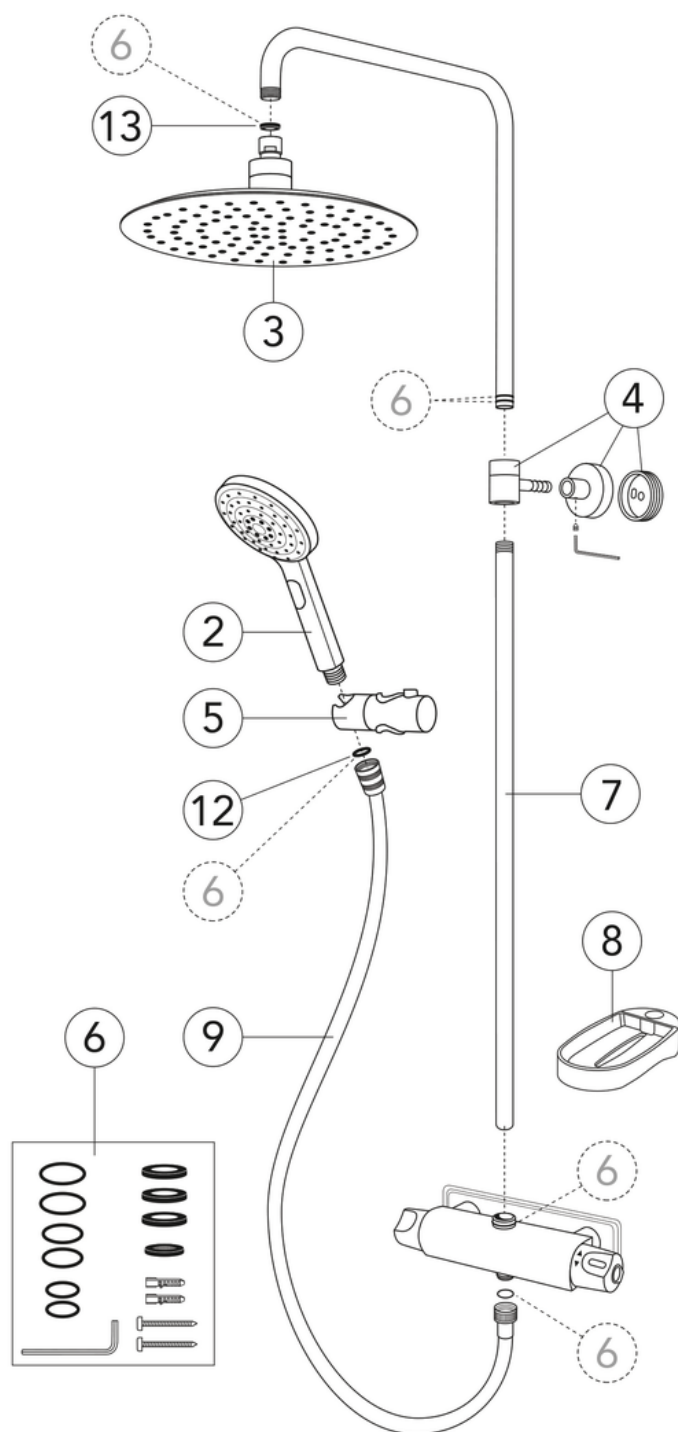


No.	Product	Art-no.
2	Handshower Round	GB41639440 53
3	Head shower Round, matte black	GB41639442 53
4	Wall bracket Round/Square, matte black	GB41639444 53
5	Slider 22 mm	GB41639445
6	Gasket set	GB41639446
7	Elevation of head shower rod	GB41639512
8	Soap shelf	GB41639513
9	Shower hose matt black	GB41637572 53
12	Flow restrictor	GB41638965 01
13	Flow restrictor	GB41639485
14	Slides ø22 matt black	GB41639445 53

GUSTAVSBERG/

FLOW CHART/

Thermostatic Mixers, Shower Columns, Spout 350 mm

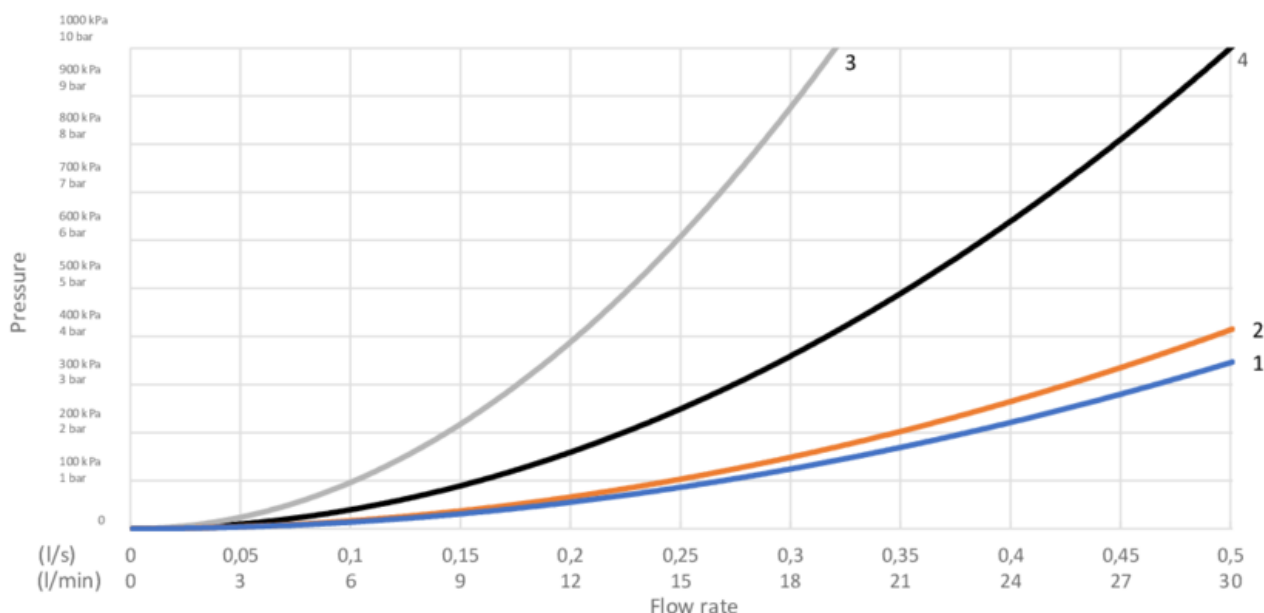

- 1. Max flow (bath- and shower outlet)
- 2. Head shower GB41103230, GB41103235
- 3. Hand shower GB41103230, GB41103235
- 4. Spout GB41650288 (350 mm)

1. Max flow (bath- and shower outlet)		2. Head shower GB41103230, GB41103235	
- Flow rate at 300 kPa:	0,465 l/s	- Flow rate at 300 kPa:	0,425 l/s
- Pressure at flow 0,1 l/s:	14 kPa	- Pressure at flow 0,1 l/s:	17 kPa
- Pressure at flow 0,2 l/s:	56 kPa	- Pressure at flow 0,2 l/s:	66 kPa
- Pressure at flow 0,33 l/s:	151 kPa	- Pressure at flow 0,33 l/s:	181 kPa

3. Hand shower GB41103230, GB41103235		4. Spout GB41650288 (350 mm)	
- Flow rate at 300 kPa:	0,175 l/s	- Flow rate at 300 kPa:	0,273 l/s
- Pressure at flow 0,1 l/s:	98 kPa	- Pressure at flow 0,1 l/s:	40 kPa
- Pressure at flow 0,2 l/s:	392 kPa	- Pressure at flow 0,2 l/s:	161 kPa
- Pressure at flow 0,33 l/s:	N/A	- Pressure at flow 0,33 l/s:	437 kPa

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com