




Quality of life since 1825



## Toote Omadused

SAFE TOUCH



- Super slim head shower with generous water flow
- 3-functional hand shower with a pushbutton
- Mixer with pure, unbroken lines and soft contours

## Article number

Art.nr.  
GB41202330

EAN  
7391530075808

## Pakendiinfo

Pikkus: 745 mm | Laius: 368 mm | Kõrgus: 94 mm

Kaal: 4.64 kg

Number pakendis: 1 pc

## Paigaldus ja hooldus

## Energiamärgistus ja vastavustunnistused



CERTIFIERING  
KONTROLL

RI  
SE




Denna produkt är anpassad till  
Branschregler Säker Vatteninstallation  
2021:1. Leverantören garanterar  
produktens funktion om branschreglerna  
och monteringsanvisningarna följs.



## Tehniline info

- Max. tap capacity (at 300 kPa): 0,465 l/s
- Pressure loss with flow (0,2 l/s) 56 kPa
- Ühenduse mõõdud: 160 c-c

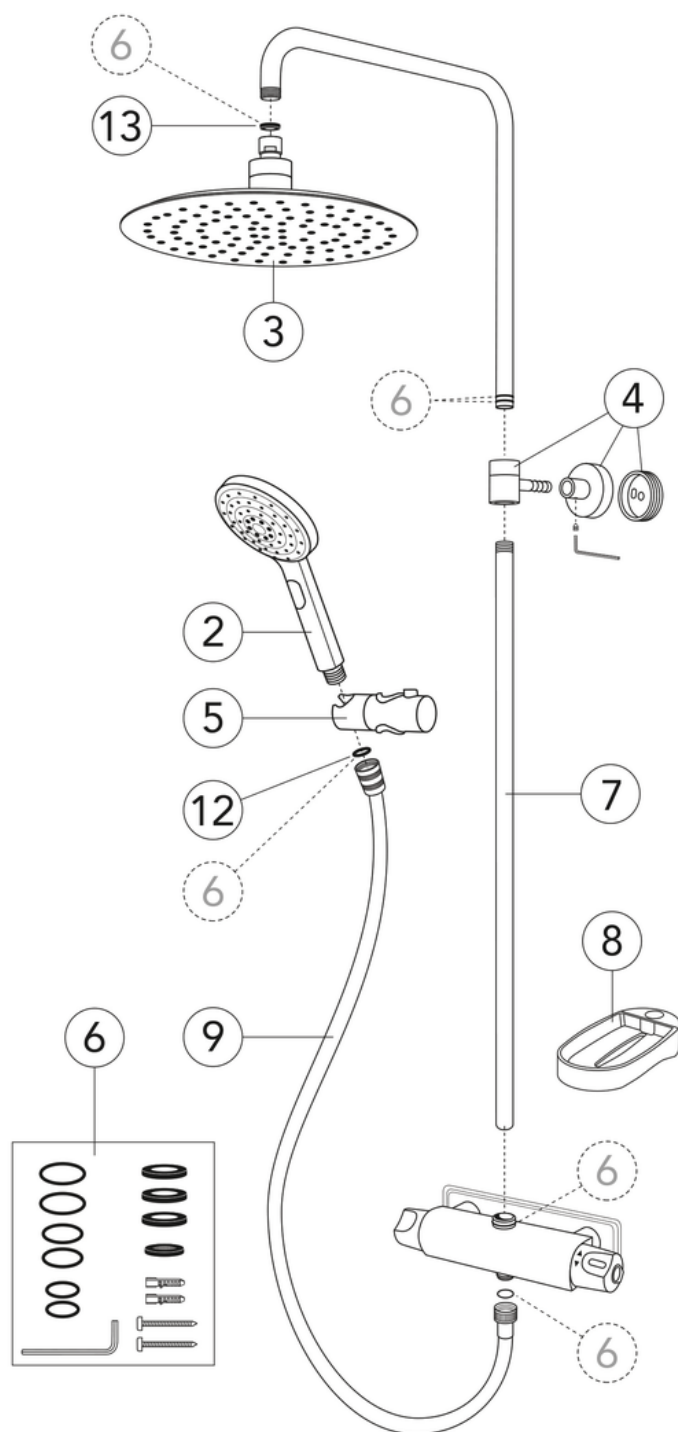


| Nr. | Toote                                          | Art.nr.       |
|-----|------------------------------------------------|---------------|
| 2   | Käsidušš Round                                 | GB41639440 53 |
| 3   |                                                | GB41639442 53 |
| 4   |                                                | GB41639444 53 |
| 5   | Liugur 22 mm                                   | GB41639445    |
| 6   | Tihendikomplekt, Square/Round dušikomplektile  | GB41639446    |
| 7   | Round/Square dušikomplekti pikendustoru 1060mm | GB41639512    |
| 8   | Seebialus, Square/Round                        | GB41639513    |
| 9   | Dušivoolik 1,75 m, kroom                       | GB41636266 00 |
| 12  | Voolutugevuse piiraja 7 l/min                  | GB41638965 01 |
| 13  | Voolutugevuse piiraja 12 l/min                 | GB41639485    |
| 14  |                                                | GB41639445 53 |

# GUSTAVSBERG/

## FLOW CHART/

Thermostatic Mixers, Shower Columns, Spout 350 mm

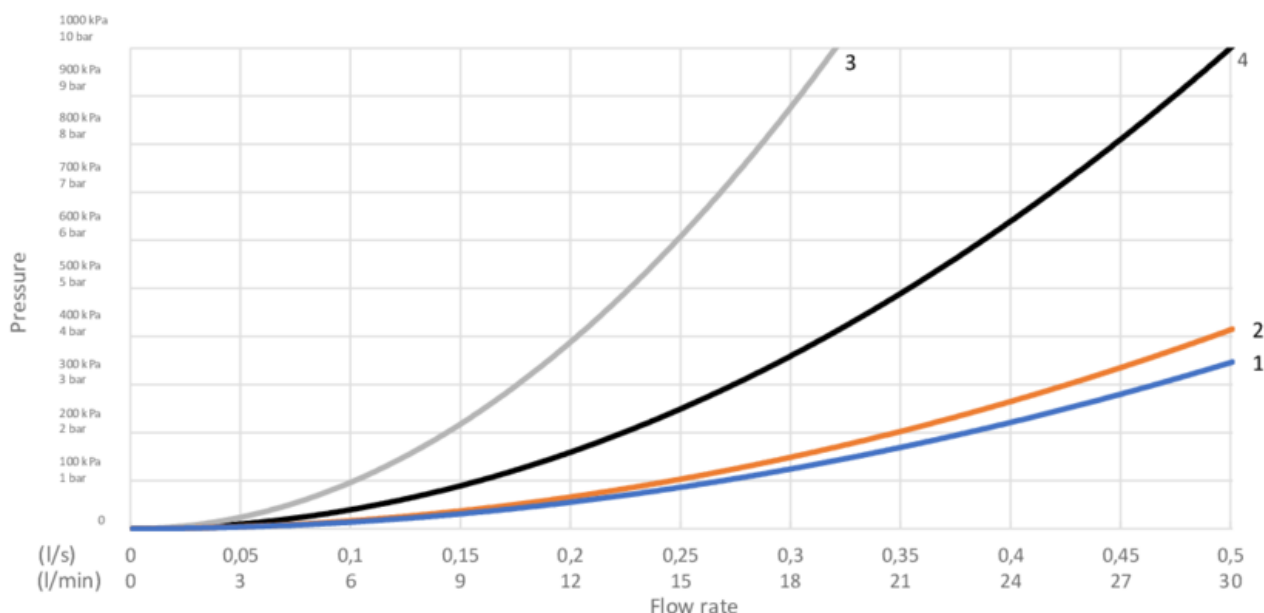

- 1. Max flow (bath- and shower outlet)
- 2. Head shower GB41103230, GB41103235
- 3. Hand shower GB41103230, GB41103235
- 4. Spout GB41650288 (350 mm)

### 1. Max flow (bath- and shower outlet)

|                              |           |
|------------------------------|-----------|
| - Flow rate at 300 kPa:      | 0,465 l/s |
| - Pressure at flow 0,1 l/s:  | 14 kPa    |
| - Pressure at flow 0,2 l/s:  | 56 kPa    |
| - Pressure at flow 0,33 l/s: | 151 kPa   |

### 2. Head shower GB41103230, GB41103235

|                              |           |
|------------------------------|-----------|
| - Flow rate at 300 kPa:      | 0,425 l/s |
| - Pressure at flow 0,1 l/s:  | 17 kPa    |
| - Pressure at flow 0,2 l/s:  | 66 kPa    |
| - Pressure at flow 0,33 l/s: | 181 kPa   |

### 3. Hand shower GB41103230, GB41103235

|                              |           |
|------------------------------|-----------|
| - Flow rate at 300 kPa:      | 0,175 l/s |
| - Pressure at flow 0,1 l/s:  | 98 kPa    |
| - Pressure at flow 0,2 l/s:  | 392 kPa   |
| - Pressure at flow 0,33 l/s: | N/A       |

### 4. Spout GB41650288 (350 mm)

|                              |           |
|------------------------------|-----------|
| - Flow rate at 300 kPa:      | 0,273 l/s |
| - Pressure at flow 0,1 l/s:  | 40 kPa    |
| - Pressure at flow 0,2 l/s:  | 161 kPa   |
| - Pressure at flow 0,33 l/s: | 437 kPa   |

Rev, 1, 2022-12-28 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)