



Quality of life since 1825

# Ducentic dušas kolonna

150 c-c

## Produkta īpašības

- Iedvesmojoties no tradicionālā un modernā dizaina
- Lieliska dušas pieredze
- Pieejams pulēta misiņa un hroma apdarē

## Article number

Art.nr.  
GB41217036

EAN  
7391530088068

## Pakuotēs informācija

Garums: 745 mm | Platums: 368 mm | Augstums: 94 mm  
Svoris: 5.6 kg  
Pakuotēs numeris: 1 pc

## Montāža un kopšana

## Enerģijas marķējums un sertifikāti



CERTIFIERING  
KONTROLL




Denna produkt är anpassad till  
Branschregler Säker Vatteninstallation  
2025:1. Leverantören garanterar  
produktens funktion om branschreglerna  
och monteringsanvisningarna följs.



## Techninė informacija


- Max. tap capacity (at 300 kPa): 0,402 l/s
- Pressure loss with flow (0,33 l/s) 203 kPa

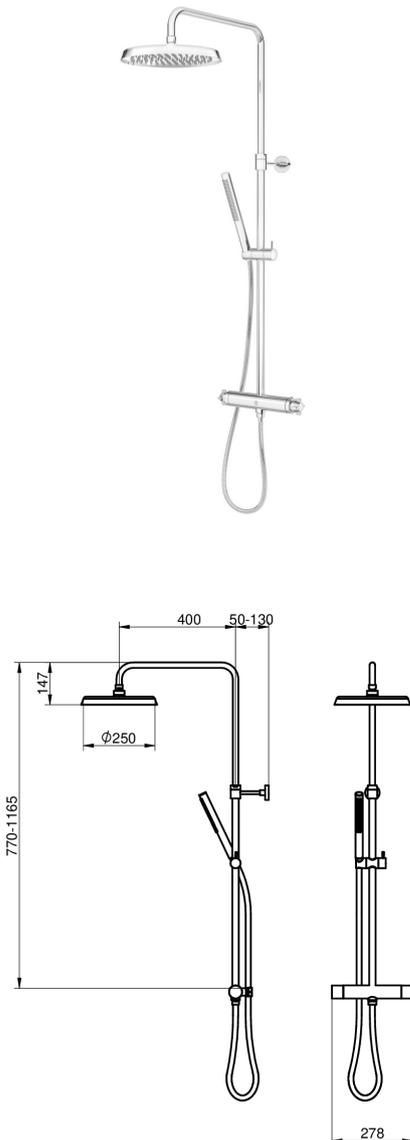

# GUSTAVSBERG/

## FLOW CHART/

### Ducentic shower column

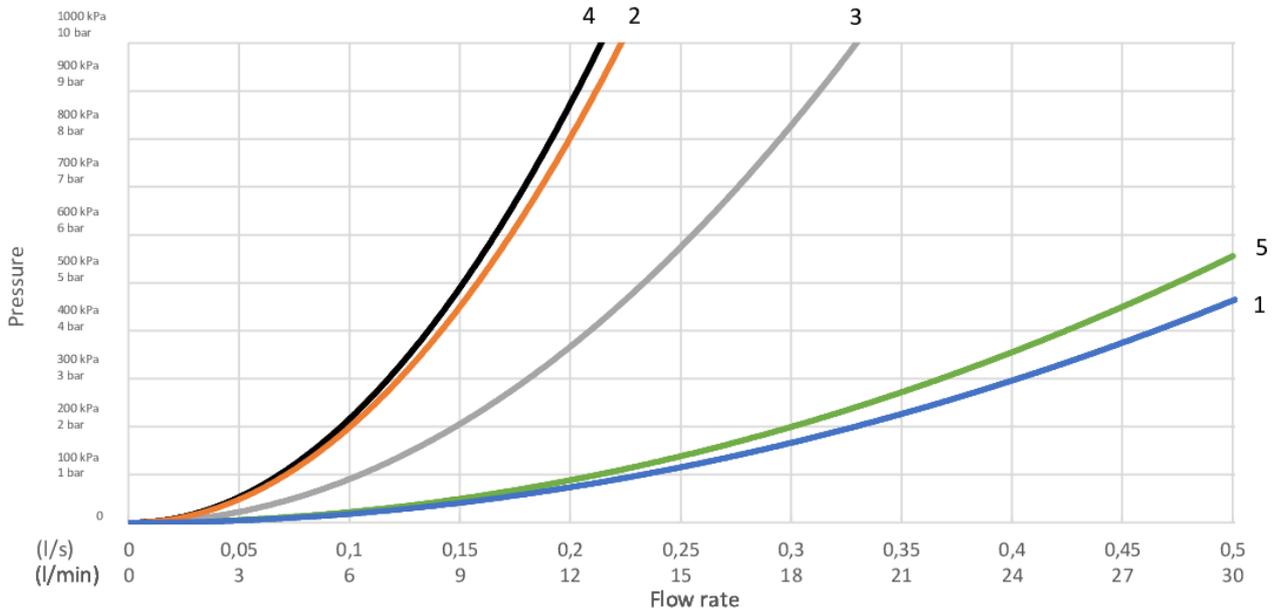

- 1. Max flow (bath and shower outlet)
- 2. Ducentic hand shower
- 3. Ducentic head shower
- 4. Ducentic hand shower + diverter spout GB41650638
- 5. Diverter spout GB41650638, bath outlet

| 1. Max flow (bath and shower outlet) |           | 2. Ducentic hand shower      |           |
|--------------------------------------|-----------|------------------------------|-----------|
| - Flow rate at 300 kPa:              | 0,402 l/s | - Flow rate at 300 kPa:      | 0,122 l/s |
| - Pressure at flow 0,1 l/s:          | 19 kPa    | - Pressure at flow 0,1 l/s:  | 203 kPa   |
| - Pressure at flow 0,2 l/s:          | 74 kPa    | - Pressure at flow 0,2 l/s:  | 811 kPa   |
| - Pressure at flow 0,33 l/s:         | 203 kPa   | - Pressure at flow 0,33 l/s: | N/A       |

| 3. Ducentic head shower      |          | 4. Ducentic hand shower + diverter spout GB41650638 |           |
|------------------------------|----------|---|-----------|
| - Flow rate at 300 kPa:      | 0,18 l/s | - Flow rate at 300 kPa:                             | 0,117 l/s |
| - Pressure at flow 0,1 l/s:  | 93 kPa   | - Pressure at flow 0,1 l/s:                         | 220 kPa   |
| - Pressure at flow 0,2 l/s:  | 370 kPa  | - Pressure at flow 0,2 l/s:                         | 882 kPa   |
| - Pressure at flow 0,33 l/s: | N/A      | - Pressure at flow 0,33 l/s:                        | N/A       |

| 5. Diverter spout GB41650638, bath outlet |           |
|---|-----------|
| - Flow rate at 300 kPa:                   | 0,367 l/s |
| - Pressure at flow 0,1 l/s:               | 22 kPa    |
| - Pressure at flow 0,2 l/s:               | 89 kPa    |
| - Pressure at flow 0,33 l/s:              | 243 kPa   |

Rev, 1, 2025-12-16 Gustavsberg Lab

Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com