



Quality of life since 1825

Kylpyamme- ja suihkusetti Ducentic

160 c-c, kiillotettu messinki

Tuotteen ominaisuudet

- Perinteisen ja modernin muotoilun innoittamana
- Sisältää sekä kattosuihkun että kylpyammeen juoksuputken
- Voidaan asentaa matalalle korotetun kahvan ansiosta

Artikkelien numero

Art.nr.
GB4120703719

EAN
7391530088754

Kokoaminen & hoito

Energiamerkintä ja -sertifiointi




Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2025:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Tekniset tiedot


- Max. tap capacity (at 300 kPa): 0,402 l/s
- Pressure loss with flow (0,33 l/s) 203 kPa

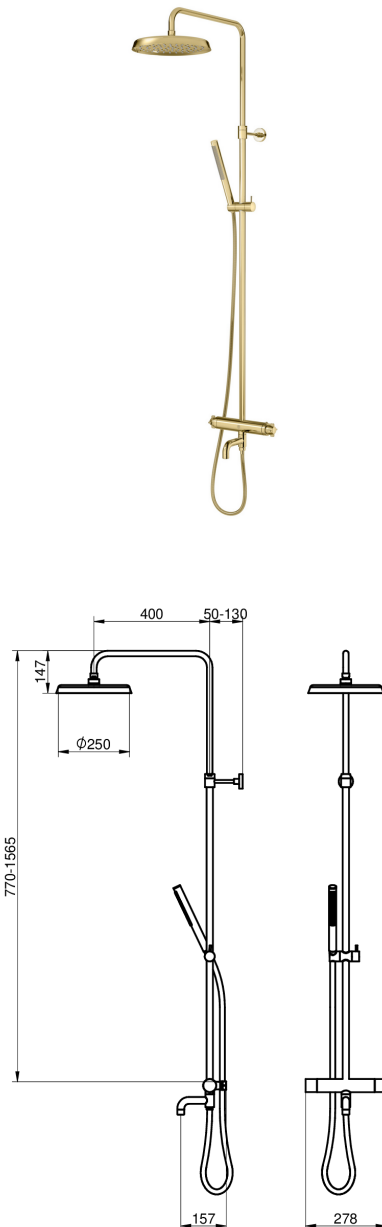

GUSTAVSBERG/

FLOW CHART/

Ducentic shower column

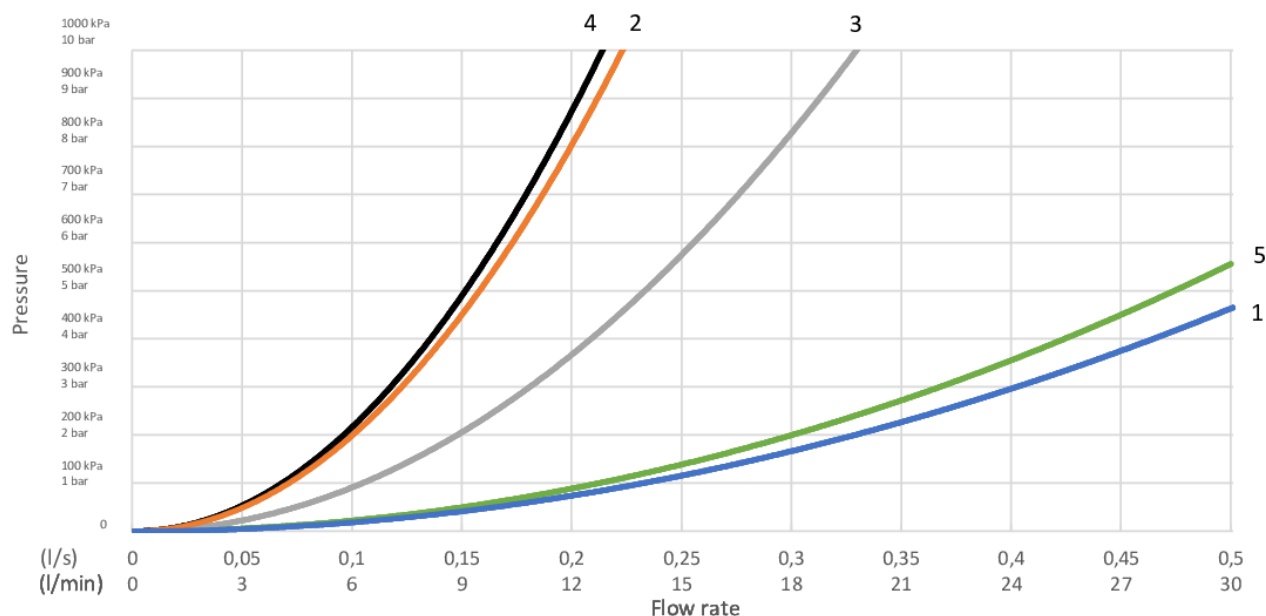

- 1. Max flow (bath and shower outlet)
- 2. Ducentic hand shower
- 3. Ducentic head shower
- 4. Ducentic hand shower + diverter spout GB41650638
- 5. Diverter spout GB41650638, bath outlet

1. Max flow (bath and shower outlet)

- Flow rate at 300 kPa:	0,402 l/s
- Pressure at flow 0,1 l/s:	19 kPa
- Pressure at flow 0,2 l/s:	74 kPa
- Pressure at flow 0,33 l/s:	203 kPa

2. Ducentic hand shower

- Flow rate at 300 kPa:	0,122 l/s
- Pressure at flow 0,1 l/s:	203 kPa
- Pressure at flow 0,2 l/s:	811 kPa
- Pressure at flow 0,33 l/s:	N/A

3. Ducentic head shower

- Flow rate at 300 kPa:	0,18 l/s
- Pressure at flow 0,1 l/s:	93 kPa
- Pressure at flow 0,2 l/s:	370 kPa
- Pressure at flow 0,33 l/s:	N/A

4. Ducentic hand shower + diverter spout GB41650638

- Flow rate at 300 kPa:	0,117 l/s
- Pressure at flow 0,1 l/s:	220 kPa
- Pressure at flow 0,2 l/s:	882 kPa
- Pressure at flow 0,33 l/s:	N/A

5. Diverter spout GB41650638, bath outlet

- Flow rate at 300 kPa:	0,367 l/s
- Pressure at flow 0,1 l/s:	22 kPa
- Pressure at flow 0,2 l/s:	89 kPa
- Pressure at flow 0,33 l/s:	243 kPa

Rev, 1, 2025-12-16 Gustavsberg Lab

Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com