



Quality of life since 1825

Vanni- ja dušikomplekt Ducentic

160 c-c, poleeritud messing

Toote Omadused

- Inspireeritud traditsioonilisest ja kaasaegsest disainist
- Komplektis on nii peadušš kui ka vannisegisti jooksutoru
- Teleskoopreguleeritav kõrgus, sobib ka madalamale paigalduseks

Article number

Art.nr.
GB4120703719

EAN
7391530088754

Paigaldus ja hooldus

Energiamärgistus ja vastavustunnistused




Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2025:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.



Tehniline info


- Max. tap capacity (at 300 kPa): 0,402 l/s
- Pressure loss with flow (0,33 l/s) 203 kPa

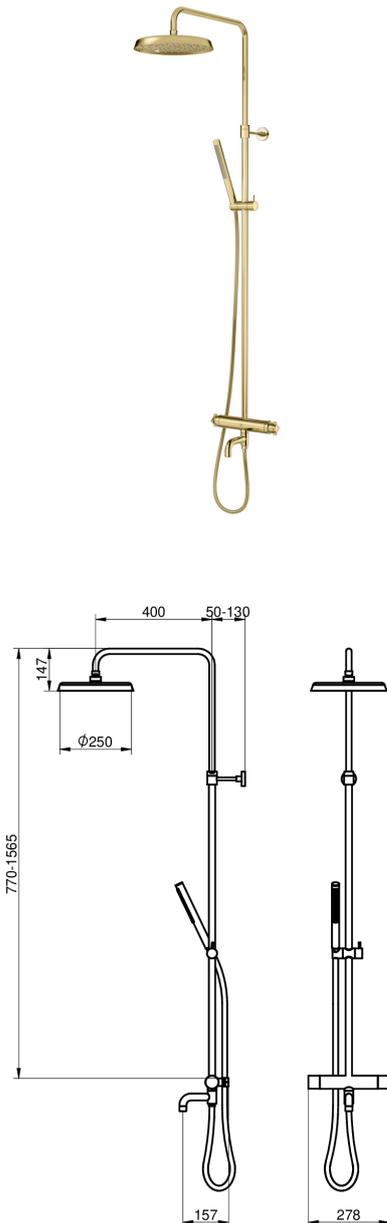

GUSTAVSBERG/

FLOW CHART/

Ducentic shower column

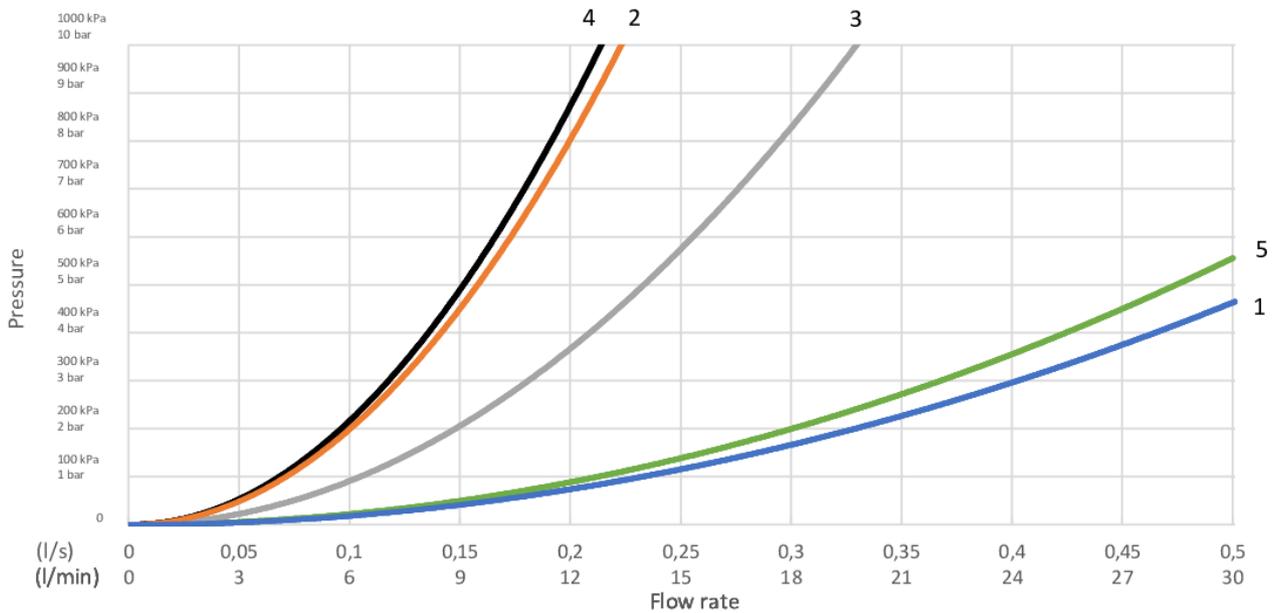

- 1. Max flow (bath and shower outlet)
- 2. Ducentic hand shower
- 3. Ducentic head shower
- 4. Ducentic hand shower + diverter spout GB41650638
- 5. Diverter spout GB41650638, bath outlet

1. Max flow (bath and shower outlet) - Flow rate at 300 kPa: 0,402 l/s - Pressure at flow 0,1 l/s: 19 kPa - Pressure at flow 0,2 l/s: 74 kPa - Pressure at flow 0,33 l/s: 203 kPa	2. Ducentic hand shower - Flow rate at 300 kPa: 0,122 l/s - Pressure at flow 0,1 l/s: 203 kPa - Pressure at flow 0,2 l/s: 811 kPa - Pressure at flow 0,33 l/s: N/A

3. Ducentic head shower - Flow rate at 300 kPa: 0,18 l/s - Pressure at flow 0,1 l/s: 93 kPa - Pressure at flow 0,2 l/s: 370 kPa - Pressure at flow 0,33 l/s: N/A	4. Ducentic hand shower + diverter spout GB41650638 - Flow rate at 300 kPa: 0,117 l/s - Pressure at flow 0,1 l/s: 220 kPa - Pressure at flow 0,2 l/s: 882 kPa - Pressure at flow 0,33 l/s: N/A
---	---

5. Diverter spout GB41650638, bath outlet - Flow rate at 300 kPa: 0,367 l/s - Pressure at flow 0,1 l/s: 22 kPa - Pressure at flow 0,2 l/s: 89 kPa - Pressure at flow 0,33 l/s: 243 kPa

Rev, 1, 2025-12-16 Gustavsberg Lab

Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com