



Quality of life since 1825

Shower column Public

Time valve, 160 c-c.

Product features

SMART INSIDE SAFE TOUCH



- Timed pressure valve flush time approx. 30 sec.
- Flow 7L/min
- Built-in automatic hot water shut-off for scalding protection

Article numbers

Art-no.
GB41202360

EAN
7391530090948

Packaging information

Length: 745 mm | Width: 368 mm | Height: 94 mm

Weight: 3.89 kg


Weight: 1 pc



Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




Technical information

- Max. tap capacity (at 300 kPa): 0,113 l/s
- Pressure loss with flow (0,1 l/s) 128 kPa

GUSTAVSBERG/

FLOW CHART/

Duschset Public

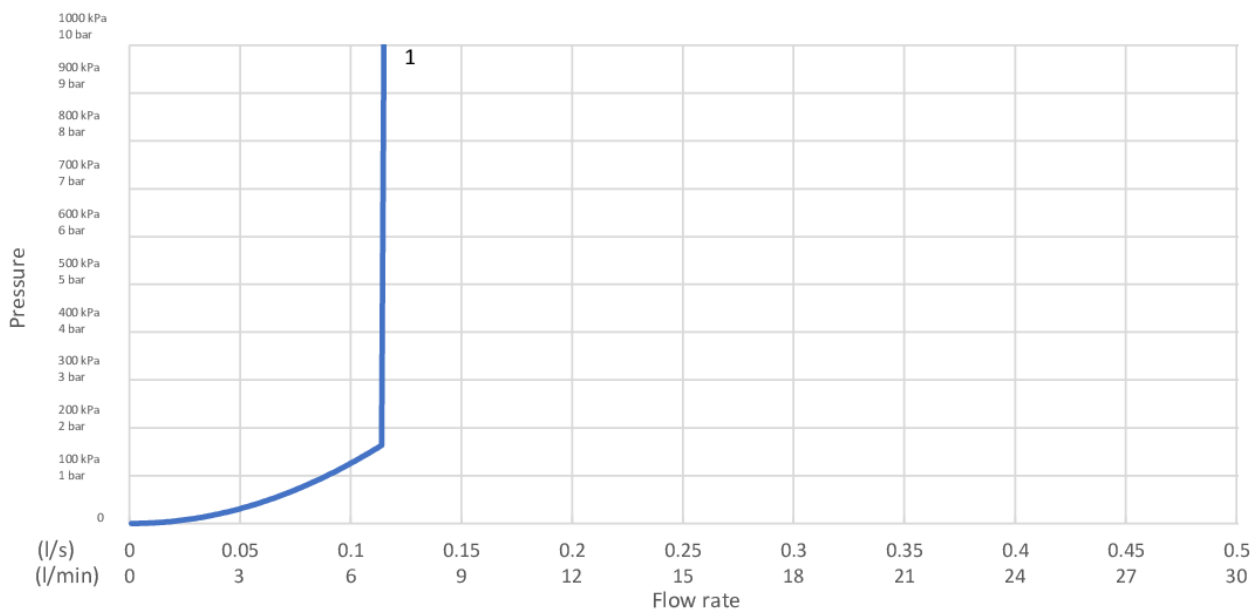

1. GB41202360, GB41212360, GB41103360

1. GB41202360, GB41212360, GB41103360

- Flowrate at 300 kPa:	0,113 l/S
- Pressure at flow 0,1 l/s:	128 kPa
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2025-08-29 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com