



Quality of life since 1825

Kitchen mixer Estetic

Matt black, lead-free, with dishwasher shut-off

Product features

LEAD-FREE

COLD-START

QUICK FIT



- Maximum flexibility with a pivoting spout, makes cooking and washing up easier. Locks for 0°, 60° and 110° are included
- Cold start technology for energy efficiency and comfort – eliminates unnecessary heat consumption and provides a safe mixer even for children
- Made from high quality materials and equipped with water saving technology to reduce environmental impact without compromising on performance or style

Article numbers

Art-no.
GB4120809653

EAN
7391530091617

Packaging information

Length: 545 mm | Width: 350 mm | Height: 70 mm

Weight: 2.8 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.


Energy labeling and certifications



CERTIFIERING
KONTROLL



Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.

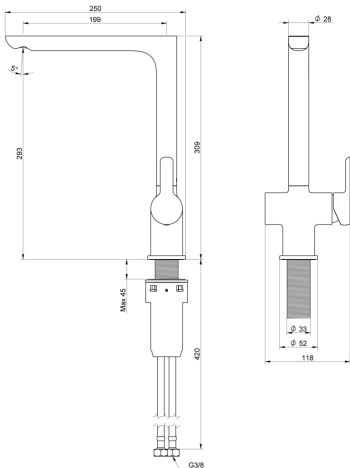

Technical information


- Pressure, Flow & Temp: Maxflöde 300kPa: 0,1l/s
- Standard connection dimension: G3/8



GUSTAVSBERG/

FLOW CHART/

Estetic kitchen L-spout with dishwasher

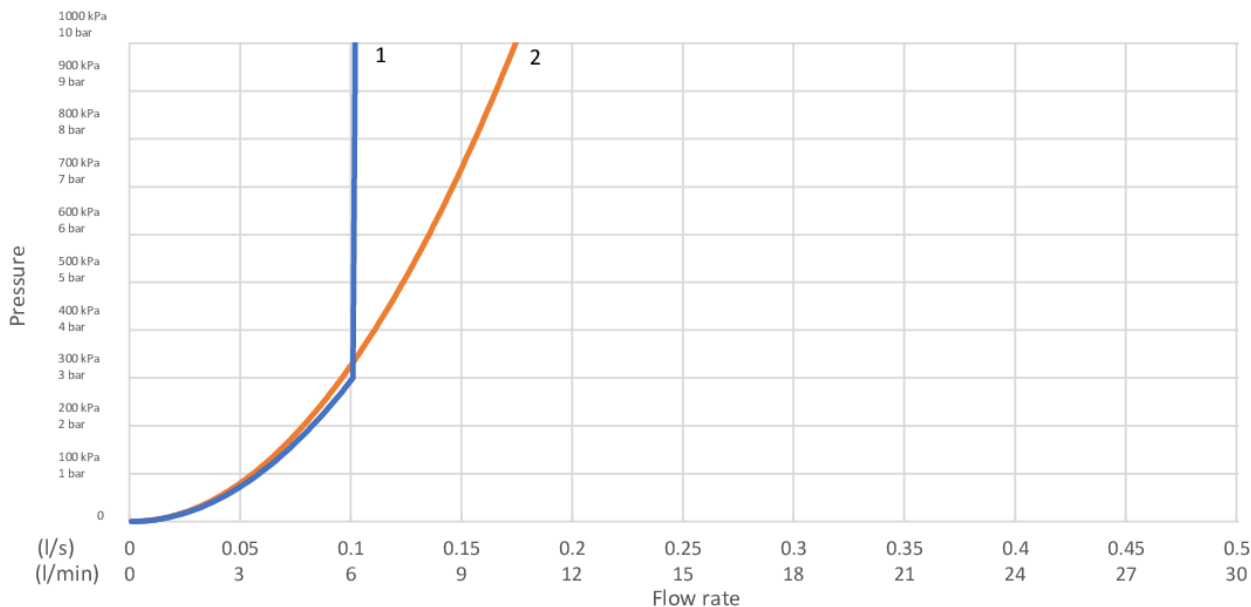GUSTAVSBERG /
SMARTER BATHROOMS



-  1. Spout
-  2. Dishwasher valve

1. Spout

- Flowrate at 300 kPa:	0,1 l/s
- Pressure at flow 0,1 l/s:	300 kPa
- Pressure at flow 0,2 l/s:	N/A
- Pressure at flow 0,33 l/s:	N/A

Rev, 1, 2025-11-06 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com