



Quality of life since 1825



# Kitchen mixer Estetic

Lead-free, pull-off, DW shut-off

## Product features



- Extendable design for increased reach and versatility, provides access to all areas of the sink
- Maximum flexibility with a pivoting spout, makes cooking and washing up easier. Locks for 0°, 60° and 110° are included
- Cold start technology for energy efficiency and comfort – eliminates unnecessary heat consumption and provides a safe mixer even for children

## Article numbers

Art-no.  
GB41208099

EAN  
7391530091624

## Packaging information

Length: 645 mm | Width: 350 mm | Height: 70 mm

Weight: 3 kg

Weight: 1 pc

## Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

## Energy labeling and certifications



## Technical information


- Pressure, Flow & Temp: Maxflöde 300kPa: 0,1l/s
- Standard connection dimension: G3/8

# GUSTAVSBERG/

## FLOW CHART/

### Estetic kitchen pull off spout w. dishwasher

GUSTAVSBERG /  
SMARTER BATHROOMS

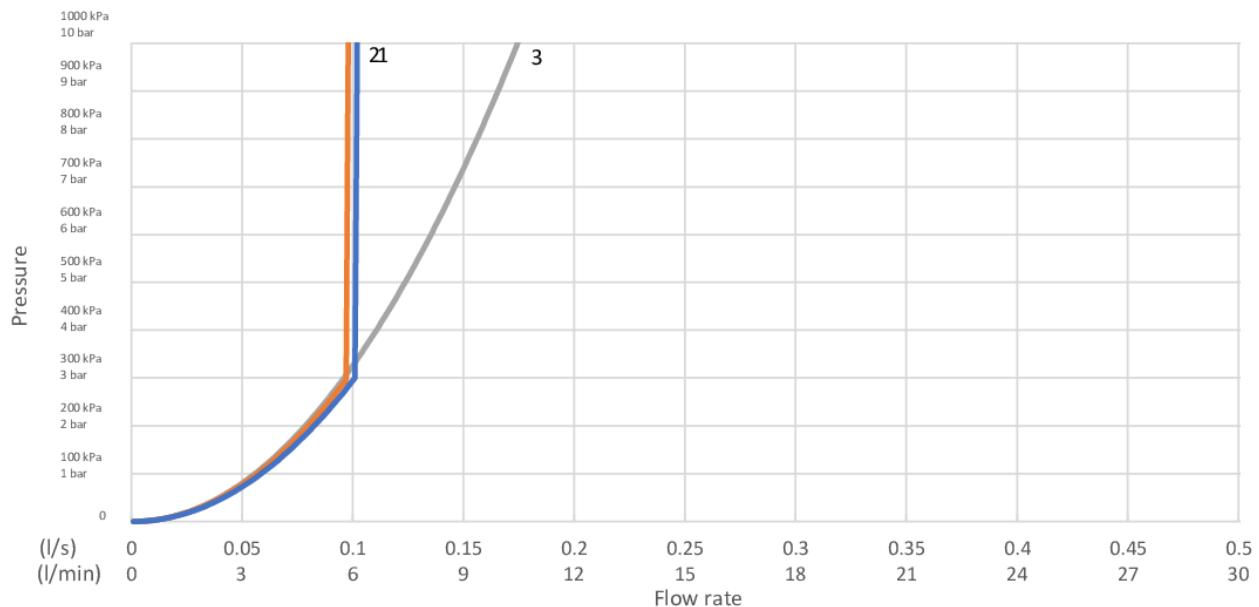

- 1. Spout - Aerated flow
- 2. Spout - Spray flow
- 3. Dishwasher valve

#### 1. Spout - Aerated flow

	- Flowrate at 300 kPa: 0,1 l/s
	- Pressure at flow 0,1 l/s: 300 kPa
	- Pressure at flow 0,2 l/s: N/A
	- Pressure at flow 0,33 l/s: N/A

Rev, 1, 2025-11-06 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / [www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)