



Quality of life since 1825

Valamusegisti Nautic – paigaldatav seinale

150 mm väljavoolutüla, 160 c-c

Toote Omadused

ENERGIASÄÄSTLIK



VATTENSÄR

- Energiaklass B, säästab energiat ja vett
- Reguleeritav mugavusvool ja -temperatuur
- Korgiga varjatud ühendused täiendava veevõtu jaoks

Article number

Art.nr.
GB41214252

EAN
7393792217866

Pakendiinfo

Pikkus: 230 mm | Laius: 185 mm | Kõrgus: 115 mm

Kaal: 2.13 kg


Number pakendis: 1 pc

Paigaldus ja hooldus

Enne paigaldamist tuleb torud kuni segistini puhtaks loputada. Segisti ühendatakse paremalt külma- ja vasakult kuumaveetoruga. Veesurve: maksim. 1000 kPa. Kuuma vee temperatuur: maksim. 80 C.


Energiamärgistus ja vastavustunnistused

- Toode vastab ohutu veevärgi nõuetele Täidab Nordic Quality nõudeid Energiaklass B, 1,86 kWh



Tehniline info

- Ühenduse mõõdud: 150 c-c

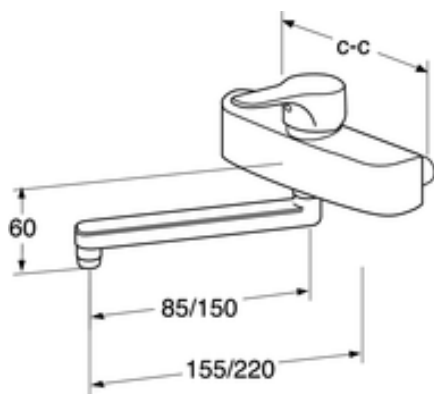


GUSTAVSBERG/

FLOW CHART/

NAUTIC SINGLE LEVER BATHTUB AND SHOWER MIXER

GUSTAVSBERG /
SMARTER BATHROOMS

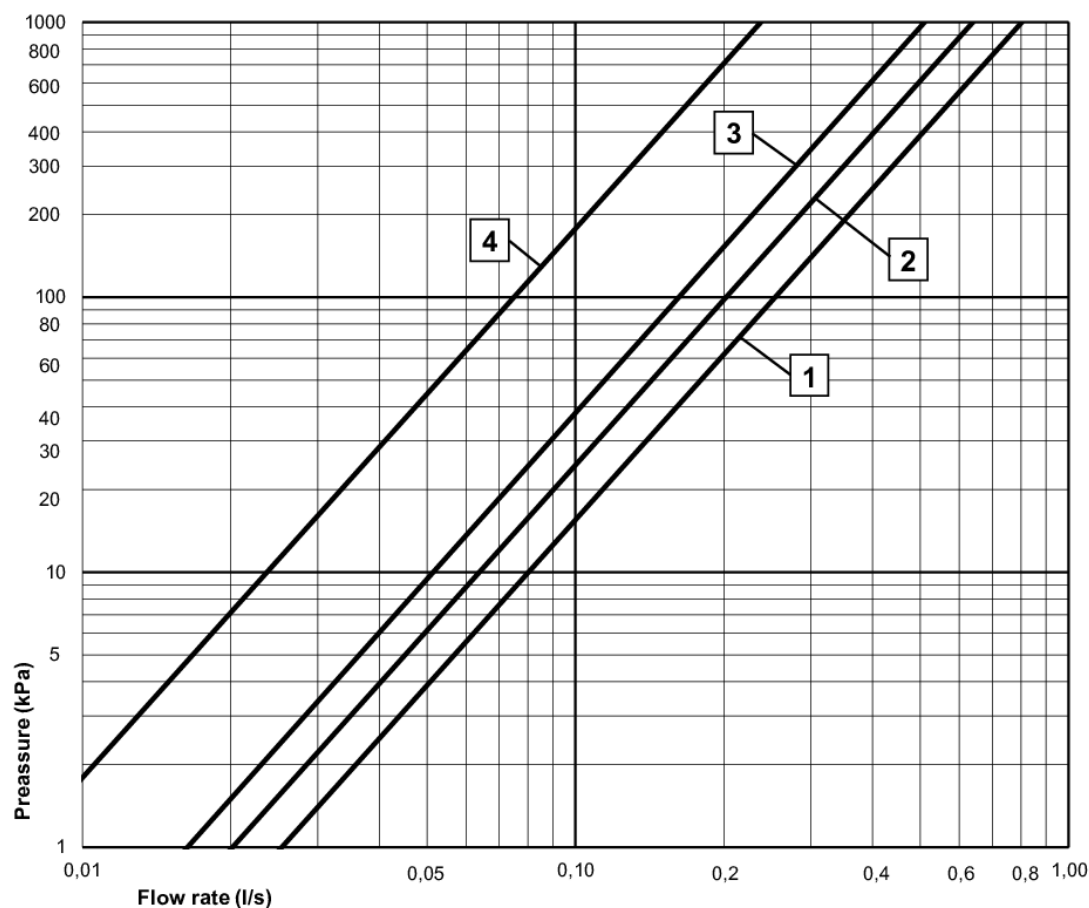

- 1** Max flow (bath- and shower outlet)
- 2** Bathtub outlet, GB41636820, GB41638760
- 3** Bathtub outlet, GB41636819, GB41638759
- 4** Shower set GB41103250

Valid for curve **1**

- Flowrate at 300 kPa:	0,44 l/s
- Pressure at flow 0,1 l/s:	16 kPa
- Pressure at flow 0,2 l/s:	62 kPa
- Pressure at flow 0,33 l/s:	169 kPa



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com