



Quality of life since 1825



Kitchen mixer Metic – high spout

Product features

ECO-FLOW



- Modern design
- Pivoting spout 110°
- Ceramic cartridge ensures non-drip operation and longevity

Article numbers

Art-no.	EAN
GB41203856	7393792232814

Packaging information

Length: 460 mm | Width: 275 mm | Height: 75 mm

Weight: 1.86 kg

Weight: 1 pc

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Energy labeling and certifications




Technical information

- Max. tap capacity (at 300 kPa): 0,179 l/s
- Pressure loss with flow (0,2 l/s) 375 kPa

GUSTAVSBERG/

FLOW CHART/ Kitchen mixer Metic

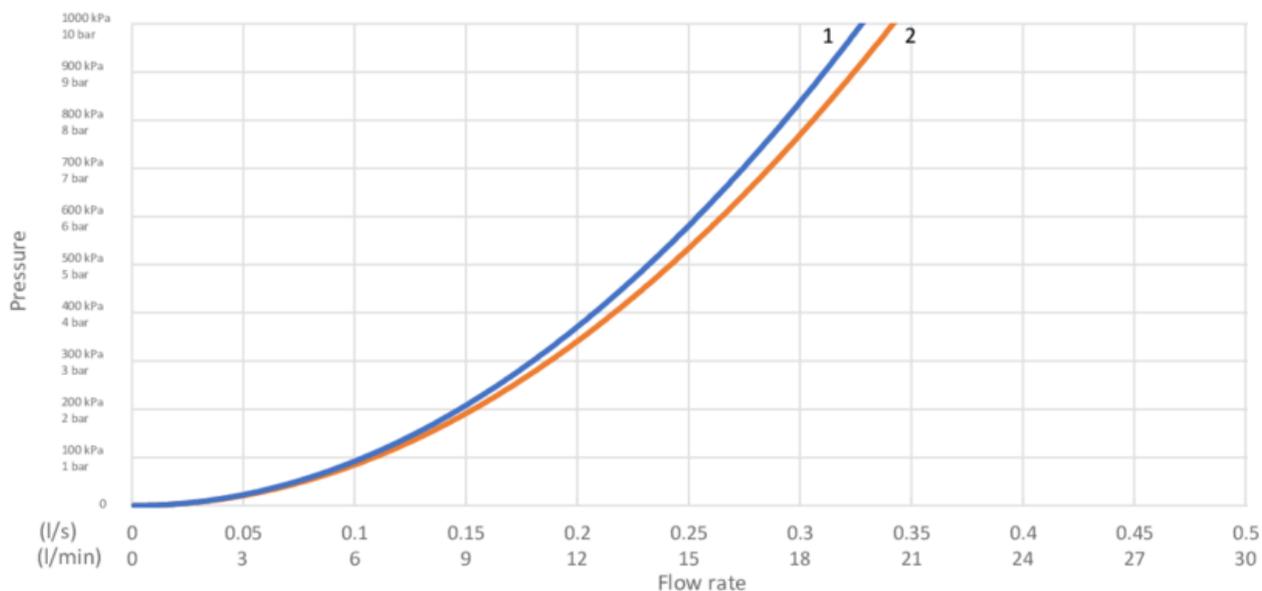

- 1. Max flow
- 2. Dishwasher shut off valve

1. Max flow		2. Dishwasher shut off valve	
- Flow rate at 300 kPa:	0,179 l/s	- Flow rate at 300 kPa:	0,187 l/s
- Pressure at flow 0,1 l/s:	94 kPa	- Pressure at flow 0,1 l/s:	86 kPa
- Pressure at flow 0,2 l/s:	375 kPa	- Pressure at flow 0,2 l/s:	344 kPa
- Pressure at flow 0,33 l/s:	N/A	- Pressure at flow 0,33 l/s:	938 kPa

Rev, 1, 2020-11-11 Gustavsberg Labb

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg / Phone +46 (0)8-570 391 00 / www.gustavsberg.com / info@gustavsberg.com